
USG MICROPERFORATIONS

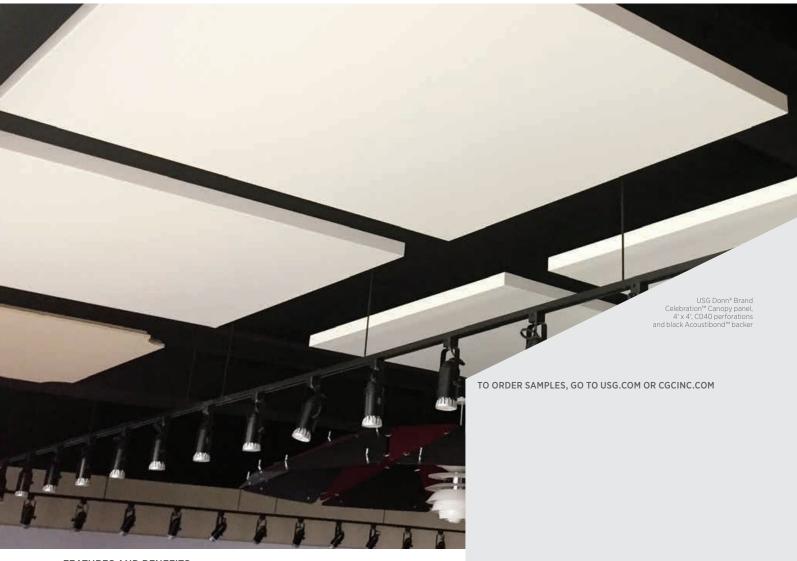

FEATURES AND BENEFITS

- Micro sized perforations disappear into panel
- Minimized open area still yields effective acoustic absorption.

APPLICATIONS

• All interior general use areas



USG MICROPERFORATIONS

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

| Pa | Pattern No. C030 | | | | Pati | Pattern No. CO40 | | | | | | | | | | |
|-----------------------------|--------------------------|----|------|-----------------------------|------|------------------|-----|---|---|---|---|---|---|---|---|--|
| 0 | 0 | 0 | 0.3 | 0 | 0 | | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | |
| 0 | | | | | | | | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 | |
| 88 | 0 | 0 | 8 | 0 | | 0 | | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 83 | 0 | 0 | 0 | 0 | 19 | 0. | . 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | |
| 80 | 0 | 0 | D | 0 | 0 | | | 0 | | | 0 | 0 | 0 | 0 | 0 | |
| | 0 | 0 | D | 0 | ø | 0 | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | |
| 3 | 0 | 0 | D | 0 | .0 | . 0 | | | | _ | _ | | | | | |
| 3 | .0 | -0 | 6 | | a | 0 | 0. | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | 0 | | D | 0 | 100 | a | - | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | | | | | | Ğ | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 2 | 0 | 0 | 0 | 0 | 0 | 0 | 8 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | |
| 8 | 0 | 9 | 0 | 0 | (0) | 0 | 10 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | |
| 61 | 0 | 0 | D. | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | | | | | | | | | | | | | | | |
| | Round—1/32" perforations | | | Rou | | | | | | | | | | | | |
| 0.197" o.c., 1.8% open area | | | 0.19 | 0.197" o.c., 3.2% open area | | | | | | | | | | | | |

ACOUSTICS

| 0.157 0.c., 1.070 open area | 0.157 0.0., 5.27 open area | | | | | | | | | |
|-----------------------------|--|------------------------------|--------------------|--|--|--|--|--|--|--|
| Pattern | Panel Type | Optional Acoustical Material | Sound Rating - NRC | | | | | | | |
| C030 | Square or Rectangular Aluminum Ceiling Panels | Acoustibond™ backer | 0.55 | | | | | | | |
| C040 | Square or Rectangular Aluminum Ceiling Panels | Acoustibond™ backer | 0.50 | | | | | | | |

PANELS **AND SIZES**

Perforation C030 Patterns C040

USG Curvatura™ 3D USG USG Celebration™ & USG Panz* USG Paraline* Plus Geometrix* 2' x 2' 7" x 144" 2' x 2' 2' x 6' 2' x 2' 30" x 30" 4' x 4' 1' x 4' 1' x 5' 20" x 60" 2' x 4' 2' x 6' 2' x 8' 30" x 60" 3" x 144"

Note: C040 is also available in the Libretto Ceiling System, subject to the rules governing standard perforation patterns in that system

PHYSICAL DATA/ FOOTNOTES

Product literature

Material

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

