


# USG SANDRIFT™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

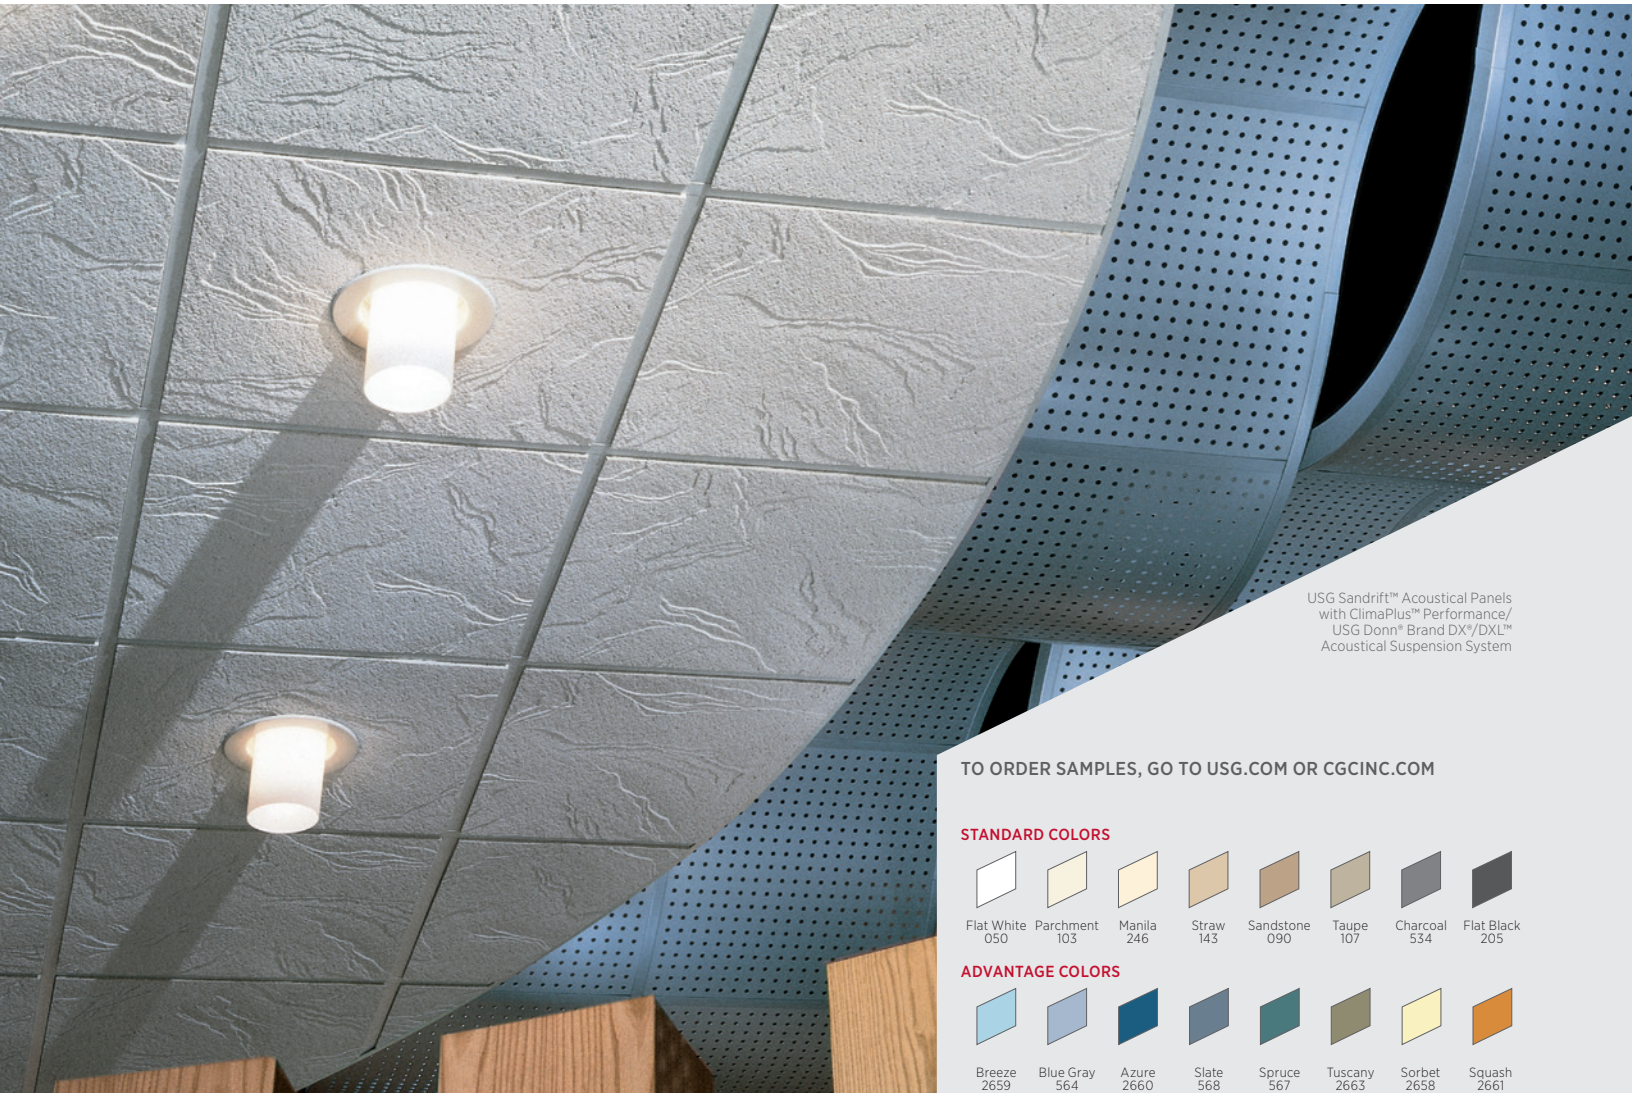


USG Sandrift™ Acoustical Panels  
with ClimaPlus™ Performance/  
USG Donn® Brand DX\*/DXL™  
Acoustical Suspension System

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)


#### STANDARD COLORS



#### ADVANTAGE COLORS

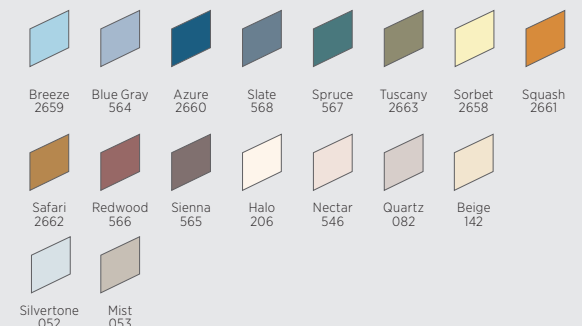

#### PREMIUM COLORS

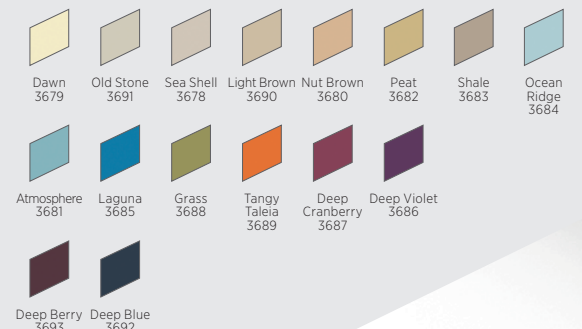

#### FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.<sup>6</sup>
- Zero VOC emissions exceed CA Specification 01350.
- Balanced Acoustics. High-NRC and High-CAC.
- USG Sandrift™ Acoustical Panels is part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

#### APPLICATIONS

- Conference and lobby areas
- Department stores
- Entertainment and gaming areas
- Executive offices
- Restaurants

#### SUBSTRATE

- Cast mineral fiber

# USG SANDRIFT™ ACOUSTICAL PANELS

## CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE  
 USG: [samplitt@usg.com](mailto:samplitt@usg.com)  
 fax: 888 874-2348 | [usg.com](http://usg.com)  
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
[usgdesignstudio.com](http://usgdesignstudio.com)  
[cgcdesignstudio.com](http://cgcdesignstudio.com)

TECHNICAL SERVICES  
 800 USG.4YOU (874-4968)



PRODUCT CERTIFIED  
 FOR LOW CHEMICAL  
 EMISSIONS:  
 UL.COM/GG  
 UL 2818



UL Classified

| Edge   | Panel Size            | Fire Rating <sup>2</sup> | Item No. | NRC  | CAC Min. | LR <sup>3</sup> | Color <sup>5</sup>               | Grid Options | VOC Emissions | Anti-Mold & Mildew/Sag Resistance | Abuse Resistant | Recycled Content <sup>1</sup> | Panel Cost |
|--------|-----------------------|--------------------------|----------|------|----------|-----------------|----------------------------------|--------------|---------------|-----------------------------------|-----------------|-------------------------------|------------|
| SL<br> | 2'x2'x3/4" Paper-Back |                          | 808      | 0.70 | 38       | 0.83            | White Standard Advantage Premium | A            | Zero          |                                   |                 | 72%                           | \$\$\$     |
| FL<br> | 2'x2'x3/4" Paper-Back |                          | 809      | 0.70 | 38       | 0.83            | White Standard Advantage Premium | B,C,D,E      | Zero          |                                   |                 | 72%                           | \$\$\$     |
| SL<br> | 2'x2'x3/4" Paper-Back |                          | 815      | 0.55 | 35       | 0.83            | White                            | A            | Zero          | —                                 |                 | 73%                           | \$\$\$     |

### Zero Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on [usg.com](http://usg.com) and at [productguide.ulenvironment.com](http://productguide.ulenvironment.com).

### ClimaPlus™ Warranty Performance<sup>4</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

### Firecode<sup>®</sup>

Abuse Resistant

## USG SANDRIFT™ PANELS

## USG SANDRIFT™ BASIC PANELS

## GRID PROFILE OPTIONS

| A<br>USG DX™/DXL™ | B<br>USG Centricitee™ DXT™ | C<br>USG Fineline™ DXF™ | D<br>USG Fineline™ 1/8 DXFF™ | E<br>USG Identitee™ DXI™ |
|-------------------|----------------------------|-------------------------|------------------------------|--------------------------|
|                   |                            |                         |                              |                          |

## PHYSICAL DATA/ FOOTNOTES

**Product literature**  
 Data sheet: SC1841

**ASTM E1264 classification**  
 Type III, Form 4, Pattern Z

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**  
 Class A  
 Flame spread: 25 or less  
 Smoke developed: 50 or less

**UL Type**  
 AP, AP-1, AP-2, AP-3

**Weight**  
 1.60 lb./sq. ft. (Class A)  
 1.75 lb./sq. ft. (Firecode<sup>®</sup> weight)

**Online tools**  
[usgdesignstudio.com](http://usgdesignstudio.com) or [cgcdesignstudio.com](http://cgcdesignstudio.com)

**Thermal resistance**  
 R-1.7 (Class A)  
 R-1.3 (Firecode<sup>®</sup>)

**Maximum backloading**  
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

**Texture**  
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

- Notes**
- For details, see LEED report tool at [usgdesignstudio.com](http://usgdesignstudio.com) or [cgcdesignstudio.com](http://cgcdesignstudio.com).
  - Fire-rated items: see UL design details.
  - LR values are shown as averages.
  - For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)* and *ClimaPlus™ Ceilings Certification of Performance (SC2451)*.
  - To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information.
  - This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on [biopreferred.gov](http://biopreferred.gov) website.

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 8-19  
 © 2019 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by  
 USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, IDENTITEE, SANDRIFT, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

