



FACTORY PROVIDED FIELD CUT LINES FOR 10', 15', AND 20' RADIUS

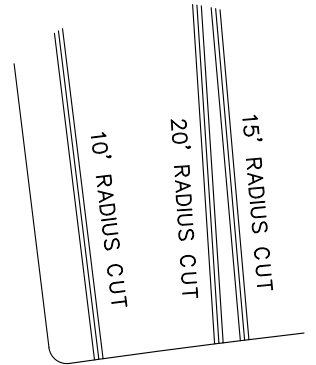


C ENLARGE VIEW

TOP VIEW



AA SECTION

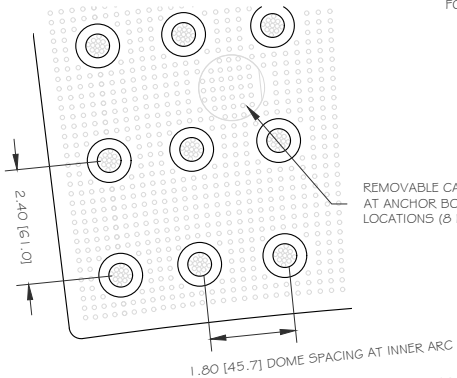

A DETAIL

FINISH PERIMETER OF PANELS WITH 1/4" [6.35] RADIUS EDGE IN CONCRETE TO PROVIDE ALLOWANCE FOR PANEL EXPANSION



CONCRETE SUBSTRATE


MICRO-CONE TRACTION FEATURE, 0.045 [1.1] HEIGHT

REMOVABLE CAP COVER

0.90 [22.9]

0.45 [11.5]

0.15 [3.8] MINIMUM THICKNESS



B DETAIL - INSTALLED IN CONCRETE



CONCRETE ANCHOR WITH CORROSION RESISTANT 1/2" HEX HEAD BOLT AND WASHER

IMPERIAL UNIT CUT CHART

Curb Radius	'A' Dimension	'B' Dimension
10'	2' - 8 <sup>5</sup> / <sub>16</sub> "	2' - 2 <sup>7</sup> / <sub>16</sub> "
15'	2' - 3 <sup>5</sup> / <sub>8</sub> "	1' - 11 <sup>7</sup> / <sub>16</sub> "
20'	2' - 3 <sup>1</sup> / <sub>16</sub> "	1' - 11 <sup>15</sup> / <sub>16</sub> "

METRIC UNIT CUT CHART

Curb Radius (m)	'A' Dimension (mm)	'B' Dimension (mm)
3.05	821	671
4.57	702	595
6.10	687	608

DETECTABLE WARNING SURFACE PANEL  
**Cast-In-Place Replaceable Radius 24 x 33**  
 PART SIZE: 24" (609.6 MM) X 33.42" (848.8 MM)  
 2.40" (60.96 MM) RADIAL ARRAY TRUNCATED DOME SPACING  
 DOME SPACING WITHIN MINIMUM AND MAXIMUM GUIDELINES

DIVISION  
TACTILE WALKING SURFACE INDICATORS  
 MATERIAL  
FIBERGLASS REINFORCED POLYMER COMPOSITE SMC  
 DRAWING NUMBER  
ADA-REP2RAD2433  
 DATE  
2023-09-06  
 DRAWING UNITS  
INCHES [MM]

WEBSITE  
ADATILE.COM  
 PHONE  
1-800-372-0519  
 EMAIL  
INFO@ADATILE.COM

