

Hydrotech® Gardendrain® GR50

formerly known as Gardendrain® GR50



BUILDING TRUST



GENERAL DESCRIPTION


Gardendrain GR50 is made of recycled polyethylene molded into a three-dimensional panel. The unique design provides retention cups on the top side, drainage channels on top and bottom and holes in the tops of the domes for aeration and upward moisture movement.

BASIC USE

Gardendrain GR50 is specifically designed to act as a drainage, aeration and water retention element in Hydrotech's Intensive Garden Roof® Assembly.

INSTALLATION

- GR50 is installed as indicated in Hydrotech's Garden Roof Installation Guidelines.
- The retention cups of GR50 are always filled with lightweight expanded aggregate.
- Volume to Fill: 3 CY per 1,000 sq.ft.

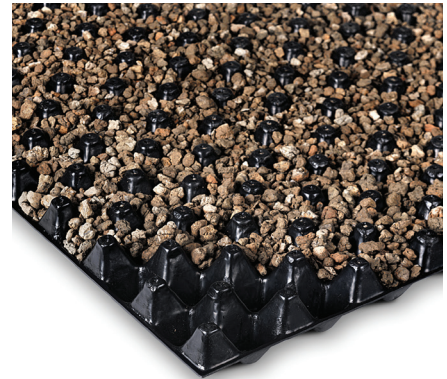

TECHNICAL DATA

PANEL DIMENSIONS:	4 ft. X 6 ft. (1.2 m X 1.8 m)	
PANEL HEIGHT:	2 in. (50 mm)	
WEIGHT:	w/cups empty	0.4 lb/ft ² (2.2 kg/m ²) – dry; 2 lb/ft ² (10.8 kg/m ²) - wet
	w/cups filled*	4.3 lb/ft ² (21.7 kg/m ²) – dry; 6.3 lb/ft ² (31.8 kg/m ²) - wet
COMPRESSIVE STRENGTH: (ASTM D1621)	3,154 lb/ft ² w/cups empty; 7,000+ lb/ft ² w/cups filled	
FLOW RATE: (ASTM D4716)	42 gal./min./ft. width (530 l./min./m.); h.g. = 1	
WATER RETENTION:	≈0.184 gal/SF (7.50 l/square meter); cups empty ≈0.221 gal/SF (9.01 l/square meter); cups filled	

* cups filled = Gardendrain element filled with LiteTop® expanded aggregate level with tops of element dimples

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	100 (pi)	
Manufacture Location		Goshen, IN
Extraction/Harvesting Location		Goshen, IN
VOC Content (g/L)		0

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.