

# Hydrotech<sup>®</sup> Adjustable Pedestal

formerly known as Adjustable Pedestal



BUILDING TRUST



## GENERAL DESCRIPTION

The Hydrotech HP adjustable pedestal system consists of a series of threaded base and top pedestal units with changeable joint spacer tabs (3/16 or 1/8 inch; snapped into the top units) composed of high density polypropylene, which can be combined with threaded extender units and fixed-height pedestals, also of high density polypropylene.

## BASIC USE

The Hydrotech adjustable pedestal system is designed for use with Hydrotech supplied Architectural Pavers or Bison Wood Tiles to provide a loose-laid, open joint paver installation. Combinations of shims, fixed-height and adjustable pedestals can provide elevation of the pavers off the substrate starting from 1/16 inch, to provide adequate space for utilities to run beneath the paver surface or to make up for differences in height between the structural deck and the finished elevation.


Hydrotech adjustable pedestals can be used singularly, or combined with HE or HE4 Extenders to accommodate elevations from 2 inches to 16 inches. LD4 Leveler Disks can be used singularly or stacked (4 max.) and placed beneath pedestals to compensate for 1/4 inch to 1 inch slopes.

## TECHNICAL DATA

	Base Bottom Diameter (inches)	Base Bottom Bearing Area (sq. inches)	Load Capacity (lb) (safety factor = 2)	Vertical Adjustment (inches)
HP (base unit)	7 7/8	48	1,000	2 - 4 3/4
HE Dark Blue Extender	-	-	-	+0 - 1 1/2
HE4 Black Extender	-	-	-	+2 1/2 - 4
Fixed-Height Pedestal HD25 HD50 HD75	5 7/8	16	-	1/4 1/2 3/4
LD4 Leveler Disk		stacking 4 high max.		sloped 1/4
B11 Flexible Rubber Shims		can be halved & quartered		1/16
PS1 Rigid Plastic Shim		can be halved & quartered		1/8



**Typical Pedestal Combinations**

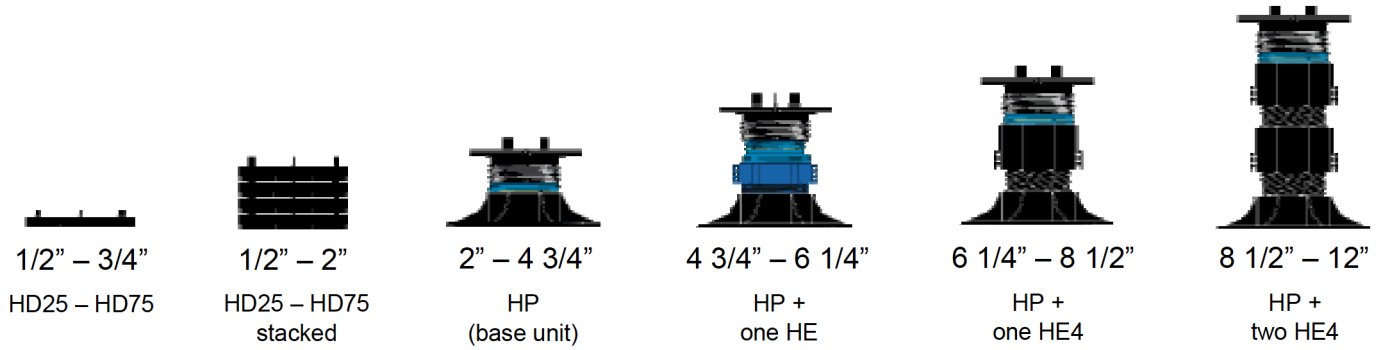

**LEED® INFORMATION**

	Credit 4	Credit 5
Recycled Content (% by weight)	20 (pi)	
Manufacture Location		Denver, CO
Extraction/Harvesting Location		Whitmore Lake, MI
VOC Content (g/L)		0

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.