AXIOM® Light Coves Indirect Light Ledge

straight and curved





Axiom® Indirect Light Trim offers a low profile light cove with predictable lighting performance which easily integrates with a 5/8" drywall board.

KEY SELECTION ATTRIBUTES

- · Axiom Indirect Light Ledge offers solutions for any lighting condition and perfect integration with any Armstrong suspension system
- · Axiom Light Coves are part of the Sustain™ portfolio and meet the most stringent industry sustainability compliance standards today
- CleanAssure™ family of products includes disinfectable panels, suspension systems, and trim
- With our lighting partners, this pre-engineered solution offers a variety of options with both Ceiling-to-Wall and Ceiling-to-Ceiling light
- Keyless light cove options provide additional flexibility and are compatible with most LED light cove fixtures
- · 10-Year Limited Warranty, 30-Year System Warranty

LIGHTING FIXTURES

Compatible with Axis Lighting and Vode® Lighting.





COLOR



Axiom Indirect Light Ledge


VISUAL SELECTION


	Item No.†	Description
Axiom Indirect Light Ledge - Classic Profile	AXILLCC2D	Ceiling-to-Ceiling 2" Classic for Drywall
	AXILLCW2D	Ceiling-to-Wall 2" Classic for Drywall
fer	AXILL2DSTR	Keyless 2" Classic for Drywall
	AXILL2DCUR*	Keyless 2" Classic for Drywall – Curved

^{*} MINIMUM BEND RADIUS FOR INDIRECT LIGHT COVES Inside: 60" minimum


Outside: 60" minimum

EDGE DETAILS






Keyless Classic Profile - Straight and Curved



CORNERS FOR CLASSIC PROFILES††

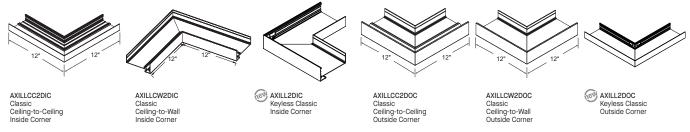

 $^{^\}dagger$ Axiom Indirect Light Ledge is 10' in length †† Axiom Indirect Light Ledge Corners are 12" in length and 12" in width

AXIOM® Light Coves Indirect Light Ledge

straight and curved

High Performance Sustainable Ceiling Systems

Declare.


LOCATION DEPENDENT

VISUAL SELECTION


	Item No.†	Description
Axiom® Indirect Light Ledge - Knife Edge® Profild	AXILLCCKD	Ceiling-to-Ceiling Knife Edge for Drywall
	AXILLCWKD	Ceiling-to-Wall Knife Edge for Drywall
	AXILLKDSTR	Keyless Knife Edge for Drywall
	AXILLKDCUR*	Keyless Knife Edge for Drywall – Curved

Inside: 60" minimum Outside: 60" minimum

EDGE DETAILS



CORNERS FOR KNIFE EDGE® PROFILES††



AXILLCCKDIC Knife Edge Ceiling-to-Ceiling Inside Corner




AXILLCWKDIC Knife Edge Ceiling-to-Wall



AXILLKDIC Keyless Knife Edge Inside Corner


Wall

Ceilina



Knife Edge Ceiling-to-Ceiling

AXILLCCKDOC Knife Edge Ceiling-to-Ceiling Outside Corner




AXILLCWKDOC Knife Edge Ceiling-to-Wall Outside Corner



- † Axiom Indirect Light Ledge is 10' in length †† Axiom Indirect Light Ledge Corners are 12" in length and 12" in width

LIGHTING PARTNERS





Outstanding Aesthetics

- · No shadows. No bright spots. No color shifting. **Easy Specification**
- · Aim-free luminaire. No need for complex details. Less trade coordination.

Unparalleled Performance


- · Twice the efficiency of other LED cove products.
- Wide distribution using SurroundLite™ technology

Worry-free Installation & Maintenance

· Foolproof keyed mounting. Up to 90% less labor.

For compatible lighting details, visit axislighting.com





- · Drop-in, tool-free installation with plug and play connections
- · Runs 100' or more from one 120v power feed
- · Section lengths in exact 1' (305mm) increments

For compatible lighting details, visit vode.com/zipwave-led-707

PHYSICAL DATA

Material

Commercial quality 3003 aluminum alloy Surface Finish Factory-applied baked polyester paint finish Cleaning & Disinfecting

Cleaning and CDC-approved disinfecting options available on armstrongceilings.com/cleaning

Warranty

10-Year Limited Warranty; 30-Year System Warranty

Various options with both Ceiling-to-Wall and Ceiling-to-Ceiling Light Ledges in a wide range of sizes with 3/4" horizontal flange.

Cross Tee/Main Beam Interface Flush fit

End Detail

Splice with screws

Design Consideration for Keyless Coves Recommended fixture weight is approximately

LEED* is a registered trademark of the U.S. Green Building Council; Declare* and Living Building Challenge* (LBC) are registered trademarks of the International Living Future Institute*; WELL* and WELL Building Standard are trademarks of the International WELL Building Institute; Axis, CovePerfekt*, and SurroundLite are trademarks of Axis Lighting; Vode* and ZiyMave* are trademarks of Vode Lighting LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2024 AWI Licensing LLC

