

TRANSITION MOLDINGS
Acoustical-to-Drywall Transition Molding

*A FrameAll™
Drywall Grid Solution*



Acoustical-to-Drywall Transition Molding

Transition moldings save time and money and are easier to install.

KEY SELECTION ATTRIBUTES

- Fewer parts and pieces; combines acoustical molding with drywall taping flange
- Pre-punched vertical web to improve screw attachment
- Knurled and slotted integral taping flange on items 7901, 7902, 7904, 7905, 7906, 7907, 7908 accommodates taping and finishing
- Protective film on the face of the wall molding flange of 7904PF and 7905PF facilitates faster, easier mudding, sanding, and taping
- Compatible with all types of framing including Armstrong® Drywall Grid and ShortSpan®

VISUAL SELECTION

	Item No.	Flange	Length	Reveal	Pcs/ Ctn	Lin. Ft./ Ctn.	
Shadow Reveal Transition Molding	7901	9/16"	120"	3/8"	12	120	
	7902	15/16"	120"	3/8"	12	120	
	7911	9/16"	120"	3/8 x 1/4"	12	120	
	7912	15/16"	120"	3/8 x 1/4"	12	120	
Flush Transition Molding	7903	9/16"	120"	1"	12	120	
	7904 7904PF*	15/16"	120"	N/A	12	120	
	7905 7905PF*	9/16"	120"	N/A	12	120	

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED® WELL™ LBC

UP TO **61% RECYCLED CONTENT**

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

VISUAL SELECTION


	Item No.	Flange	Length	Transition Height	Pcs/Ctn	Lin. Ft./Ctn.	
F Vertical Transition Molding	7906	1/2"	120"	N/A	12	120	
	7913	9/16"	120"	N/A	12	120	
	7914	15/16"	120"	N/A	12	120	
Regular Transition Molding	7907	9/16"	120"	15/16"	12	120	
	7908	15/16"	120"	15/16"	12	120	
Step Transition Molding	7909	15/16"	120"	1"	12	120	
	7910	9/16"	120"	1"	12	120	

* Protective film applied to face of wall molding flange for easier finishing.

ACCESSORIES


2" Beam End Retaining Clip – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

- ALBERC2 (aluminum) – 200 pcs
- FZALBERC2 (aluminum) – 50 pcs
- BERC2 (steel) – 200 pcs
- FZBERC2 (steel) – 50 pcs



Knurled Angle Molding – Hemmed with prefinished exposed flanges.

- KAM10 – 10 pcs
- KAM12 – 10 pcs



TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED WELL LBC

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™ armstrongceilings.com/greengenie

energy management	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
construction waste mgmt	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
regional materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
design for flexibility	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
EPD	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recyclable/producer resp.	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
biobased materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recycled content	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recycling of materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
low emitting materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
lighting quality	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
acoustics	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics

LOCATION DEPENDENT


Well Building Standard™ (WELL) Living Building Challenge® (LBC)

INSTALLATION DETAILS

Drywall to Acoustical (Acoustical Flange with 3/8" reveal) 7901 – 9/16" and 7902 – 15/16"





Drywall to Acoustical 1" Step 7910 – 9/16" and 7909 – 15/16"

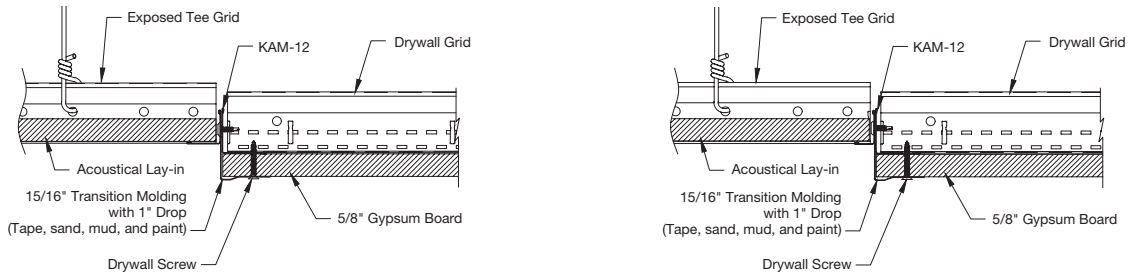


Drywall to Acoustical (1" Inverted T) 7903




Drywall to Acoustical Flush Transition 7904/7904PF – 15/16" and 7905/7905PF – 9/16"

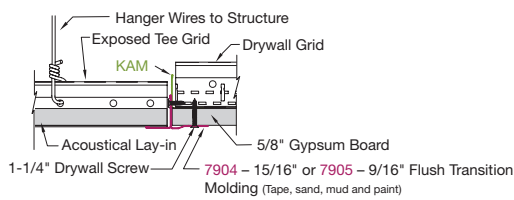

F Vertical Transition Molding Flush 7906

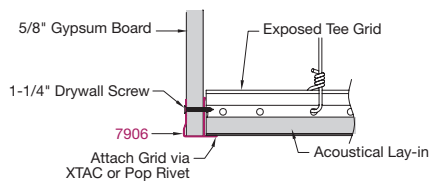

Drywall-to-Acoustical Tegular 7907 – 9/16" and 7908 – 15/16"

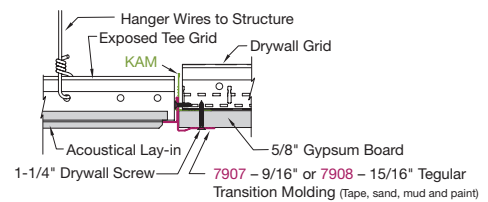

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED WELL LBC

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie


energy management	recycled content
construction waste mgmt	recycled content
regional materials	sourcing of raw materials
design for flexibility	material ingredient reporting
EPD	low emitting materials
recyclable/extended producer resp.	lighting quality
biobased materials	acoustics

LOCATION DEPENDENT

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

INSTALLATION DETAILS (CONTINUED)

Drywall to Acoustical (Acoustical Flange with 3/8" x 1/4" reveal) 7911 – 9/16" and 7912 – 15/16"

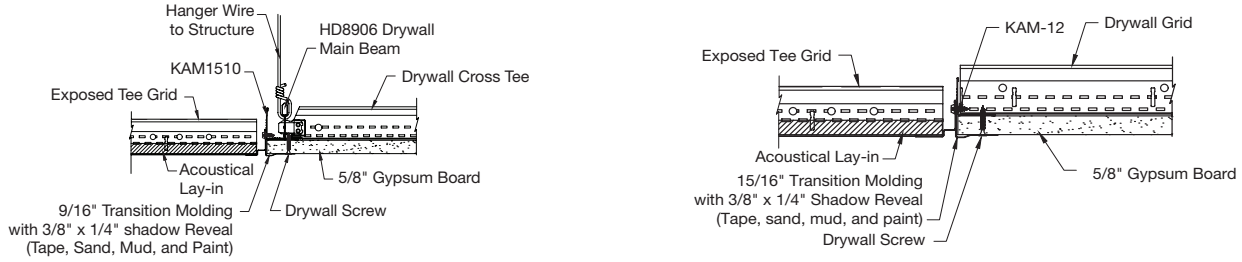

Stepped 7913 – 9/16" and 7914 – 15/16"

