


SIMPLECURVE® AND KAM
Knurled Angle Molding

*A FrameAll™
Drywall Grid Solution*

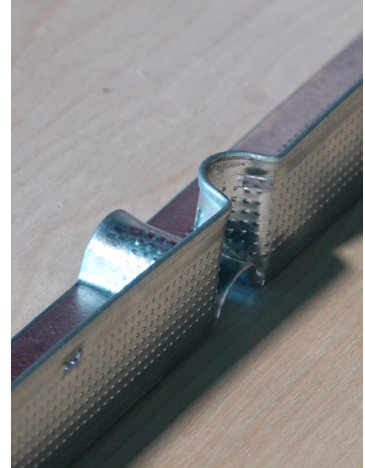

SimpleCurve Knurled Angle Molding, part of the FrameAll™ Drywall Grid family of products

SimpleCurve KAM is a pre-engineered molding that eliminates field modifications and form curves as tight as 32" radius.



KEY SELECTION ATTRIBUTES

- Hemmed edges are easier to handle than standard "shiny ninety" framing angle
- Easier to install – prepunched holes on the top edge and ScrewStop™ reverse hem catch screws, preventing slip off
- KAM Angles have simple packaging that makes cutting to length easy
- Packaged 10 pcs/bundle
- FrameAll™ Drywall Grid is part of the Sustain™ portfolio and meets the most stringent industry sustainability compliance standards today
- Sourced and manufactured in the USA

KAM

- All Angle products meet true and actual gauge specifications according to ASTM C645
- Available in popular 1-1/4", 1-1/2", and 2" sizes in the right gauges for your project

SimpleCurve®

- Available in 1-1/2" and 2" sizes in the right gauges for your project
- Bend to create curves as tight as 32" radius
- Overlap end-to-end for continuous curves without visible transitions

MATERIALS

Meets ASTM A653 for zinc-coated hot dipped galvanized steel. Surfaces are chemically cleansed, zinc-coated, and prefinished. Materials also conform to the performance standard ASTM C645 (Standard Specification for Rigid Furring Channels for Screw Applications of Gypsum Board) and ASTM C635 for Specification for manufacturing and performance of Metal Suspension systems.

FRAMEALL™ DRYWALL GRID – Standard



SIMPLECURVE® AND KAM

Knurled Angle Molding



LEED® WELL™ LBC

UP TO 61% RECYCLED CONTENT

energy management
construction waste mgmt
regional materials
design for flexibility

EPD
recyclable/ biobased materials
producer resp.
recycled content
sourcing of low materials
material ingredient reporting
low emitting/ materials
lighting quality
acoustics



Calculate sustainability with Ecomedes
armstrongceilings.com/ecomedes

LOCATION DEPENDENT

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)


VISUAL SELECTION

PACKAGING

	Item No.	Length	Height	Metal Thickness	PCS/ CTN	LF/ CTN
 <p>Knurled Angle Molding</p>	KAM10	120"	1-1/4"	0.018"	10	100
	KAM12	144"	1-1/4"	0.018"	10	120
	KAM12G90	144"	1-1/4"	0.018"	10	120
	KAM1510	120"	1-1/2"	0.018"	10	100
	KAM1512	144"	1-1/2"	0.018"	10	120
	KAM151020E	120"	1-1/2"	0.028"	10	100
	KAM151220E	144"	1-1/2"	0.028"	10	120
	KAM151020	120"	1-1/2"	0.033"	10	100
	KAM1525G90	120"	1-1/2"	0.018"	10	100
	KAM1520G90	120"	1-1/2"	0.033"	10	100
	KAM21025	120"	2"	0.018"	10	100
	KAM21020EQ	120"	2"	0.028"	10	100
	KAM21020	120"	2"	0.033"	10	100
	 <p>SimpleCurve KAM</p>	SC151220EQ (37" Radius)	148"	1-1/2"	0.028"	10
SC151225 (32" Radius)		148"	1-1/2"	0.018"	10	124
SC21220EQ (55" Radius)		148"	2"	0.028"	10	124
SC21225 (40" Radius)		148"	2"	0.018"	10	124

NOTE: .018" metal thickness meets ASTM C645 for framing

Knurled Angle Molding

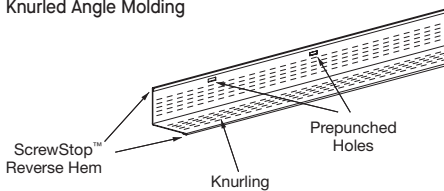

SimpleCurve® KAM

