

TRANSITION MOLDINGS
Acoustical-to-Drywall Transition Molding

*A FrameAll™
Drywall Grid Solution*



Acoustical-to-Drywall Transition Molding

Transition moldings save time and money and are easier to install.

KEY SELECTION ATTRIBUTES

- Fewer parts and pieces; combines acoustical molding with drywall taping flange
- Pre-punched vertical web to improve screw attachment
- Knurled and slotted integral taping flange on items 7901, 7902, 7904, 7905, 7906, 7907, 7908 accommodates taping and finishing
- Protective film on the face of the wall molding flange of 7904PF and 7905PF facilitates faster, easier mudding, sanding, and taping
- Compatible with all types of framing including Armstrong® Drywall Grid and ShortSpan®

VISUAL SELECTION

| | Item No. | Flange | Length | Reveal | Pcs/Ctn | Lin. Ft./Ctn. | |
|----------------------------------|--------------------------|--------|--------|------------|---------|---------------|-----|
| Shadow Reveal Transition Molding | 7901 | 9/16" | 120" | 3/8" | 12 | 120 | |
| | 7902 | 15/16" | 120" | 3/8" | 12 | 120 | |
| | 7911 | 9/16" | 120" | 3/8 x 1/4" | 12 | 120 | |
| | 7912 | 15/16" | 120" | 3/8 x 1/4" | 12 | 120 | |
| | Flush Transition Molding | 7903 | 9/16" | 120" | 1" | 12 | 120 |
| 7904 7904PF* | | 15/16" | 120" | N/A | 12 | 120 | |
| 7905 7905PF* | | 9/16" | 120" | N/A | 12 | 120 | |
| | | | | | | | |

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED® WELL™ LBC

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie

energy management

construction waste mgmt

regional materials

design for flexibility

EPD

recyclable/extended producer resp.

biobased materials

recycled content

sourcing of raw materials

material ingredient reporting

low emitting materials

lighting quality

acoustics

LOCATION DEPENDENT

Well Building Standard™ (WELL)

Living Building Challenge® (LBC)

VISUAL SELECTION


| | Item No. | Flange | Length | Transition Height | Pcs/Ctn | Lin. Ft./Ctn. | |
|-------------------------------|----------|--------|--------|-------------------|---------|---------------|--|
| F Vertical Transition Molding | 7906 | 1/2" | 120" | N/A | 12 | 120 | |
| | 7913 | 9/16" | 120" | N/A | 12 | 120 | |
| | 7914 | 15/16" | 120" | N/A | 12 | 120 | |
| Regular Transition Molding | 7907 | 9/16" | 120" | 15/16" | 12 | 120 | |
| | 7908 | 15/16" | 120" | 15/16" | 12 | 120 | |
| Step Transition Molding | 7909 | 15/16" | 120" | 1" | 12 | 120 | |
| | 7910 | 9/16" | 120" | 1" | 12 | 120 | |

* Protective film applied to face of wall molding flange for easier finishing.

ACCESSORIES


2" Beam End Retaining Clip – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

- ALBERC2 (aluminum) – 200 pcs
- FZALBERC2 (aluminum) – 50 pcs
- BERC2 (steel) – 200 pcs
- FZBERC2 (steel) – 50 pcs



Knurled Angle Molding – Hemmed with prefinished exposed flanges.

- KAM10 – 10 pcs
- KAM12 – 10 pcs



TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED WELL LBC

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™ armstrongceilings.com/greengenie



| | | | | | |
|-------------------------|---------------------------|------------------------|-------------------------------|------------------|-----------|
| energy management | recycled content | recycling of materials | low emitting materials | lighting quality | acoustics |
| construction waste mgmt | design for flexibility | recycled content | material ingredient reporting | | |
| regional materials | EPD | recycled content | low emitting materials | | |
| | recyclable/producer resp. | biobased materials | | | |

LOCATION DEPENDENT



Well Building Standard™ (WELL) Living Building Challenge® (LBC)

INSTALLATION DETAILS



Drywall to Acoustical (Acoustical Flange with 3/8" reveal) 7901 – 9/16" and 7902 – 15/16"

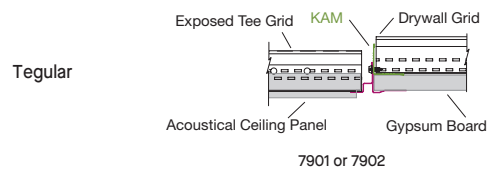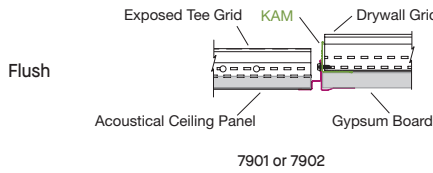



Drywall to Acoustical 1" Step 7910 – 9/16" and 7909 – 15/16"

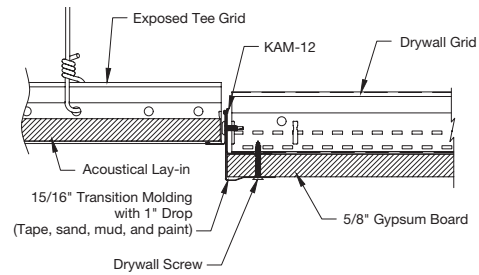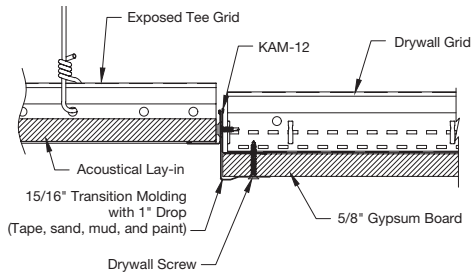


Drywall to Acoustical (1" Inverted T) 7903

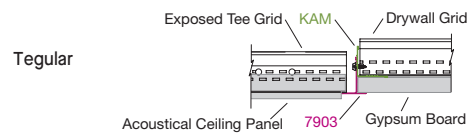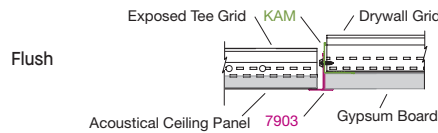


Drywall to Acoustical Flush Transition 7904/7904PF – 15/16" and 7905/7905PF – 9/16"

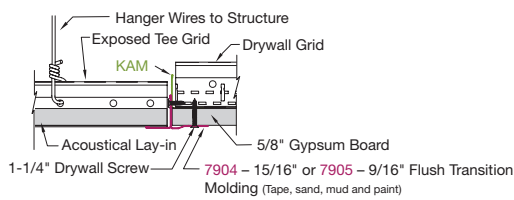

F Vertical Transition Molding Flush 7906

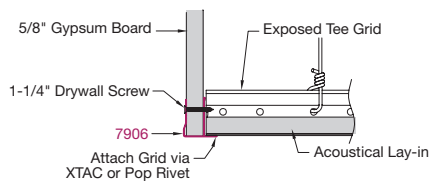

Drywall-to-Acoustical Tegular 7907 – 9/16" and 7908 – 15/16"

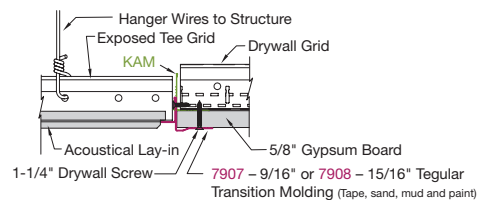

TRANSITION MOLDINGS

Acoustical-to-Drywall Transition Molding

LEED WELL LBC

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™
armstrongceilings.com/greengenie


| | | | |
|------------------------------------|------------------------|------------------------|---------------------------|
| energy management | management | recycled content | recycled content |
| construction waste mgmt | regional materials | design for flexibility | EPD |
| recyclable/extended producer resp. | biobased materials | recycled content | sourcing of raw materials |
| material ingredient reporting | low emitting materials | lighting quality | acoustics |

LOCATION DEPENDENT

Well Building Standard™ (WELL)
Living Building Challenge® (LBC)

INSTALLATION DETAILS (CONTINUED)

Drywall to Acoustical (Acoustical Flange with 3/8" x 1/4" reveal) 7911 – 9/16" and 7912 – 15/16"

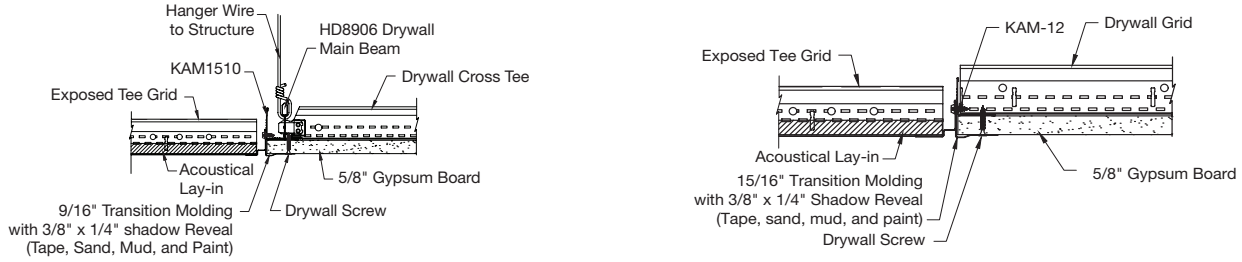

Stepped 7913 – 9/16" and 7914 – 15/16"

