

TRANSITION MOLDINGS  
Acoustical-to-Drywall Transition Molding

*A FrameAll™  
Drywall Grid Solution*









Acoustical-to-Drywall Transition Molding

Transition moldings save time and money and are easier to install.

KEY SELECTION ATTRIBUTES

- Fewer parts and pieces; combines acoustical molding with drywall taping flange
- Pre-punched vertical web to improve screw attachment
- Knurled and slotted integral taping flange on items 7901, 7902, 7904, 7905, 7906, 7907, 7908 accommodates taping and finishing
- Protective film on the face of the wall molding flange of 7904PF and 7905PF facilitates faster, easier mudding, sanding, and taping
- Compatible with all types of framing including Armstrong® Drywall Grid and ShortSpan®

VISUAL SELECTION

	Item No.	Flange	Length	Reveal	Pcs/ Ctn	Lin. Ft./ Ctn.	
Shadow Reveal Transition Molding	7901	9/16"	120"	3/8"	12	120	
	7902	15/16"	120"	3/8"	12	120	
	7911	9/16"	120"	3/8 x 1/4"	12	120	
	7912	15/16"	120"	3/8 x 1/4"	12	120	
	Flush Transition Molding	7903	9/16"	120"	1"	12	120
7904 7904PF*		15/16"	120"	N/A	12	120	
7905 7905PF*		9/16"	120"	N/A	12	120	

# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

LEED® WELL™ LBC

UP TO **61% RECYCLED CONTENT**

energy management  
construction waste mgmt  
regional materials  
design for flexibility  
EPD  
recyclable/extended producer resp.

biobased materials  
recycled content  
sourcing of raw materials  
material ingredient reporting  
low emitting materials  
lighting quality  
acoustics

Calculate sustainability with Green Genie™  
armstrongceilings.com/greengenie

LOCATION DEPENDENT

Well Building Standard™ (WELL)  
Living Building Challenge® (LBC)

### VISUAL SELECTION


	Item No.	Flange	Length	Transition Height	Pcs/Ctn	Lin. Ft./Ctn.	
F Vertical Transition Molding	7906	1/2"	120"	N/A	12	120	
	7913	9/16"	120"	N/A	12	120	
	7914	15/16"	120"	N/A	12	120	
Regular Transition Molding	7907	9/16"	120"	15/16"	12	120	
	7908	15/16"	120"	15/16"	12	120	
Step Transition Molding	7909	15/16"	120"	1"	12	120	
	7910	9/16"	120"	1"	12	120	

\* Protective film applied to face of wall molding flange for easier finishing.

### ACCESSORIES


**2" Beam End Retaining Clip** – Joins main beam or cross tee to wall molding and web of suspension system with no visible pop rivets.

- ALBERC2 (aluminum) – 200 pcs
- FZALBERC2 (aluminum) – 50 pcs
- BERC2 (steel) – 200 pcs
- FZBERC2 (steel) – 50 pcs



**Knurled Angle Molding** – Hemmed with prefinished exposed flanges.

- KAM10 – 10 pcs
- KAM12 – 10 pcs



# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

**LEED WELL LBC**

UP TO **61% RECYCLED CONTENT**

Calculate sustainability with Green Genie™ [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)



energy management	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
construction waste mgmt	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
regional materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
design for flexibility	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
EPD	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recyclable/producer resp.	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
biobased materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recycled content	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
recycling of materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
low emitting materials	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
lighting quality	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics
acoustics	recycled content	recycling of materials	low emitting materials	lighting quality	acoustics

LOCATION DEPENDENT



Well Building Standard™ (WELL) Living Building Challenge® (LBC)

### INSTALLATION DETAILS



Drywall to Acoustical (Acoustical Flange with 3/8" reveal) 7901 – 9/16" and 7902 – 15/16"

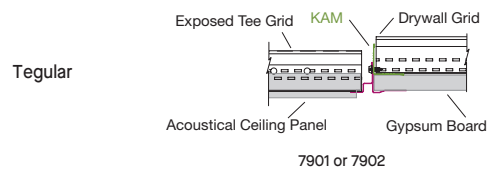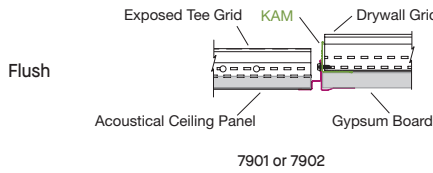



Drywall to Acoustical 1" Step 7910 – 9/16" and 7909 – 15/16"

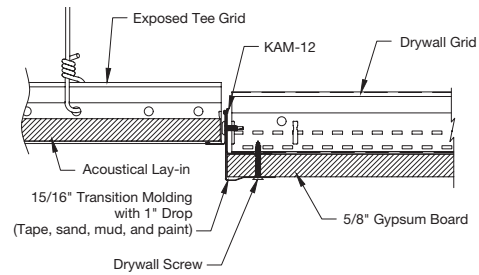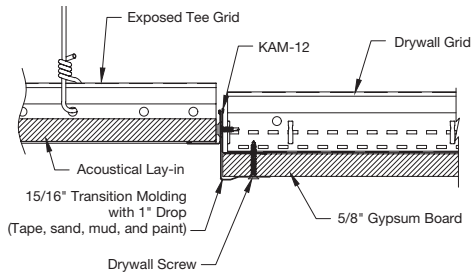


Drywall to Acoustical (1" Inverted T) 7903

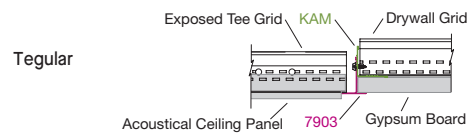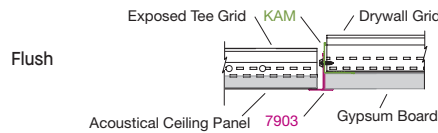


Drywall to Acoustical Flush Transition 7904/7904PF – 15/16" and 7905/7905PF – 9/16"

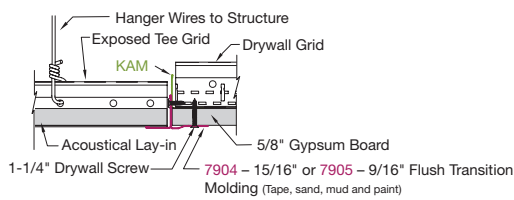

F Vertical Transition Molding Flush 7906

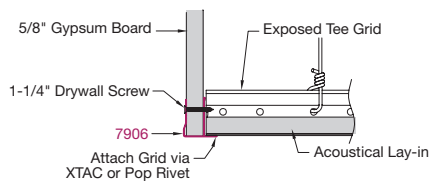

Drywall-to-Acoustical Tegular 7907 – 9/16" and 7908 – 15/16"

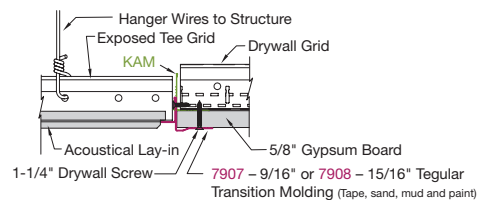

# TRANSITION MOLDINGS

## Acoustical-to-Drywall Transition Molding

LEED WELL LBC UP TO 61% RECYCLED CONTENT

Calculate sustainability with Green Genie™ [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)



energy management	recyclable/extended producer resp.
construction waste mgmt	biobased materials
regional materials	recycled content
design for flexibility	sourcing of raw materials
EPD	material ingredient reporting
	low emitting materials
	lighting quality
	acoustics

LOCATION DEPENDENT

Well Building Standard™ (WELL)  
Living Building Challenge® (LBC)

### INSTALLATION DETAILS (CONTINUED)

Drywall to Acoustical (Acoustical Flange with 3/8" x 1/4" reveal) 7911 – 9/16" and 7912 – 15/16"

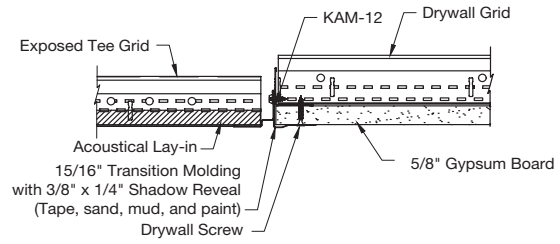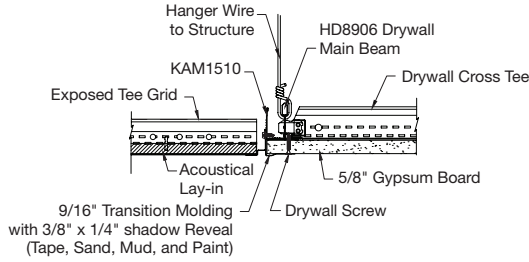

Stepped 7913 – 9/16" and 7914 – 15/16"

