

## Bullnose Corner Bead (CBB)

### Metal Corner Bead

Bullnose corner bead is used to create a smooth, rounded look to standard drywall corners. Bullnose adds contemporary styling and a sense of openness to any room. Bullnose bead is nailed, screwed or stapled in place and finished with joint compound. Bullnose is available with a galvanized finish meeting ASTM C1047 standard.

[Bullnose to 90° transition caps](#) are also available to provide a smooth transition to baseboard or corner molding. They install quickly and easily and can be used with metal, vinyl or paper-faced bullnose corner bead.

### Product Data & Ordering Information

**Material:** 0.0125" min. thickness, galvanized coating **Dimensions:** 1-1/4" leg x 1-1/4" leg x 3/4" Radius

Size (Radius)	Length	Wt./Ctn.	Pcs./Ctn.
3/4"	8'	52 lbs	50
3/4"	9'	53 lbs	45
3/4"	10'	52 lbs	40

### Code Approvals & Performance Standards



- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

### Storage

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

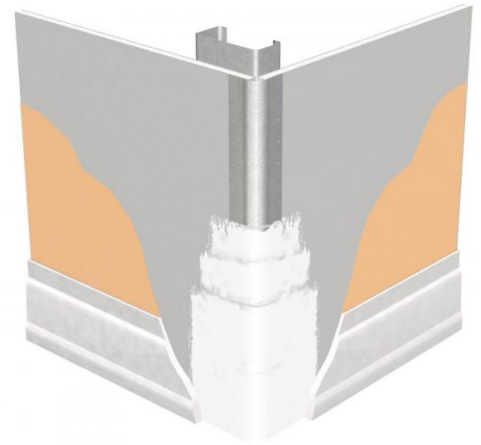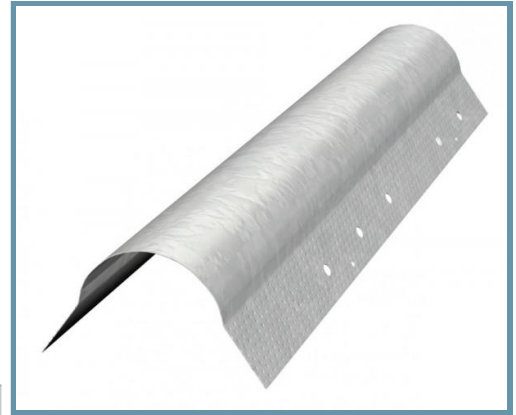

- Finish for superior compound adhesion
- Galvanized for corrosion protection and durability
- Rugged steel construction