

Fire Rated Control Joint (FAS-093X)

Drywall or veneer plaster fire rated control joint


A composite control joint with intumescent tape factory applied to one side of the back of the control joint. The FAS-093X has been tested according to UL-2079 "Test For Fire Resistance of Building Joint Systems" and is used to relieve stresses of expansion and contraction of drywall interior partitions or ceilings running in a horizontal or vertical direction. The opening is protected by an orange plastic tape to indicate the fire rating this tape is removed after joint compound has been applied and the finish is completed. The section is fabricated from hot-dipped galvanized steel complying with ASTM A653.

Code Approvals & Performance Standards

- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM C1047](#) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
- [ASTM E1966](#) Standard Test Method for Fire-Resistive Joint Systems
- [UL Designs WW-D-0172](#) 1 and 2 Hour Assemblies
- [UL Designs HW-D-0596](#) 1 and 2 Hour Assemblies
- [UL Designs HW-D-0621](#) 1 and 2 Hour Assemblies
- [UL Designs 2079 Fifth Edition](#) Tests for Fire Resistance of Building Joint Systems
- [SDS For ASTM A653 Steel Finishing Products](#) For Interior Finishing and Exterior Finishing

Installation:

- FAS-093X can be used on metal or wood framing on one side or both sides of the wall.
- Can be installed with drywall fasteners or staples before the flanges are coated with tape and joint compound.

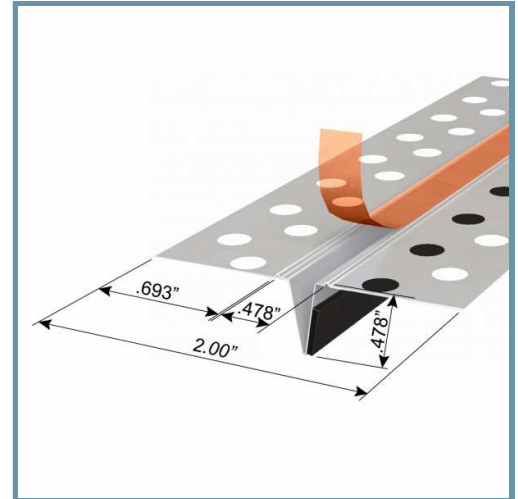

- No Drywall Rips Required
- No Sealant Required
- No Mineral Wool Required
- UL Listed Joint System
- US Patent 8,671,632



1 Hour Fire Rating
(1) 5/8" Type "X" Drywall on each side



2 Hour Fire Rating
(2) 5/8" Type "X" Drywall on each side