

1-1/2" Furring / Hat Channel (150F125-33)

33mil (20ga STR)

Geometric Properties

Depth: 1.500 in
Width: 1.250 in

Design Thickness: 0.0346 in
Min. steel thickness: 0.0329 in


Yield stress, Fy: 33ksi
Ultimate, Fu: 45ksi

Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	0.174 in ²
Member weight per foot of length	0.590 lb/ft
Moment of inertia (Ix)	0.056 in ⁴
Radius of gyration (Rx)	0.566 in
Gross moment of inertia (Iy)	0.093 in ⁴
Gross radius of gyration (Ry)	0.733 in

Effective Section Properties, Strong Axis

Moment of inertia for deflection (Ix)	0.056 in ⁴
Section modulus (Sx)	0.071 in ³
Allowable bending moment (Ma)	117.31 ft-lb
Allowable shear force (Va)	474 lb

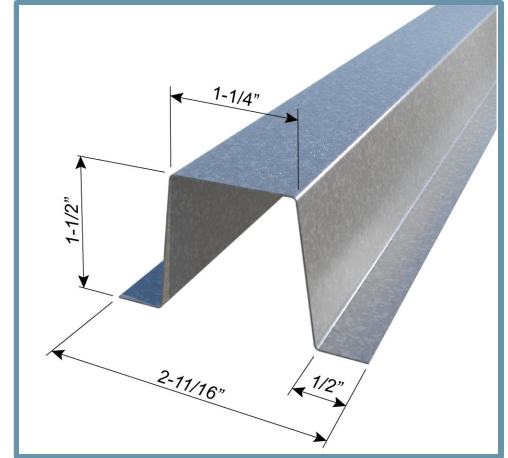

Used in framing applications:

- Furring for walls & ceilings
- Furring out masonry walls
- Framing for drop ceilings assemblies

Product Data & Ordering Information:

Coating: CP60 (CP90 Available) **Stock length:** 10'-0" and 12'-0" long pieces **Packaging:** 10 pieces per bundle - 440 pieces per pallet **Packaging weight:** 54 lbs/bundle

Furring / Hat Channel Allowable Ceiling Spans (Deflection: L/360)

Dead Load	4 psf			6 psf			13 psf		
	12"	16"	24"	12"	16"	24"	12"	16"	24"
Hat Spacing o.c.									
Single Span	8'-6"	7'-8"	6'-9"	7'-5"	6'-9"	5'-10"	5'-9"	5'-2"	4'-6"
Multiple Span	10'-6"	9'-6"	8'-4"	9'-2"	8'-4"	7'-3"	7'-1"	6'-5"	5'-7"

For more span tables and table notes see: www.clarkdietrich.com/products/furring-channel-hat-channel

Code Approvals & Performance Standards

- **AISI S240-20** North American Standard for Cold-Formed Steel Structural Framing
 - (Compliant to ASTM C955, but IBC replaced with AISI S200 in IBC 2015, AISI S240 in IBC 2018)
 - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
 - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
 - Section C Installation - (Referencing ASTM C1007)
- **SDS For ASTM A1003 Steel Framing Products** For Interior Framing, Exterior Framing and Clips/Accessories

Sustainability Credits For more details and LEED letters contact Technical Services at 888-437-3244 or visit clarkdietrich.com/LEED.

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

