



**Product category:** T125 (1-1/4" Leg Structural Track)  
**Product name:** **362T125-33 (33ksi, CP60) - Unpunched**  
 33mils (20ga) Coating: CP60 per ASTM C955  
 Color coding: White

**Geometric Properties**

Web depth	3.771 in		
Leg width	1.25 in		
Design thickness	0.0346 in	Min. steel thickness	0.0329 in
Yield strength, Fy	33 ksi	*Fy with Cold-Work, Fya	33.0 ksi
Ultimate, Fu	45.0 ksi		

**Gross Section Properties of Full Section, Strong Axis**

Cross sectional area (A)	0.212 in <sup>2</sup>
Member weight per foot of length	0.72 lb/ft
Moment of inertia (Ix)	0.438 in <sup>4</sup>
Section modulus (Sx)	0.232 in <sup>3</sup>
Radius of gyration (Rx)	1.439 in
Gross moment of inertia (Iy)	0.030 in <sup>4</sup>
Gross radius of gyration (Ry)	0.377 in

**Effective Section Properties, Strong Axis**

Effective Area (Ae)	0.109 in <sup>2</sup>
Moment of inertia for deflection (Ix)	0.385 in <sup>4</sup>
Section modulus (Sx)	0.174 in <sup>3</sup>
Allowable bending moment (Ma)	3.44 in-k
Allowable shear force in web	1024 lb

**Torsional Properties**

St. Venant torsion constant (J x 1000)	0.085 in <sup>4</sup>
Warping constant (Cw)	0.076 in <sup>6</sup>
Distance from shear center to neutral axis (Xo)	-0.658 in
Distance between shear center and web centerline (m)	0.410 in
Radii of gyration (Ro)	1.626 in
Torsional flexural constant (Beta)	0.836


**ASTM & Code Standards:**

- AISI North American Specification [NASPEC] S100-12
- \* Effective properties incorporate the strength increase from the cold work of forming
- Gross properties are based on the cross section away from the punchouts
- Structural framing is produced to meet or exceed ASTM C955
- Sheet steel meets or exceeds mechanical and chemical requirements of ASTM A1003
- ClarkDietrich's structural and nonstructural framing comply with the SFIA Code Compliance Certification Program, ICC-ES ESR-1166P and Intertek CCRR-0206
- For installation & storage information refer to ASTM C1007
- SDS & Product Certification Information is available at [tools.clarkdietrich.com](http://tools.clarkdietrich.com)

**Sustainability Credits:**

For more details and LEED letters contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com/LEED](http://www.clarkdietrich.com/LEED)  
**LEED v4 MR Credit** -- Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).  
**LEED 2009 Credit MR 2 & MR 4** -- ClarkDietrich's steel products are 100% recyclable and have a national average recycled content of 34.2% (19.8% post-consumer and 14.4% pre-consumer). If seeking a higher number to meet Credit MR 5, please contact us at ([info@clarkdietrich.com](mailto:info@clarkdietrich.com) / 888-437-3244)

**05.40.00 (Cold-Formed Metal Framing)**

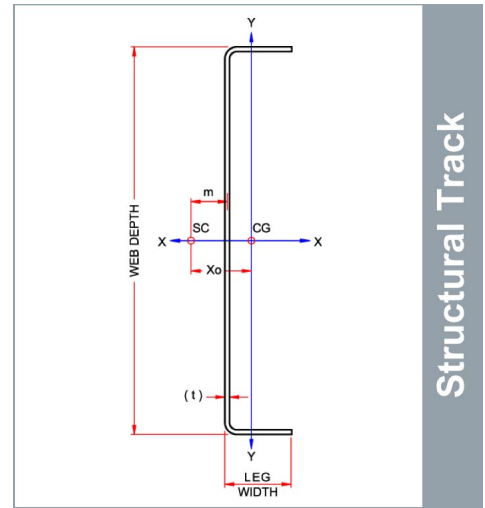

Structural Track

**Used in framing applications:**

- Load-bearing walls
- Curtain walls
- Tall interior walls
- Floor & ceiling joists
- Trusses

<b>Project Information</b>	<b>Contractor Information</b>	<b>Architect Information</b>
Name:	Name:	Name:
Address:	Contact:	Contact:
	Phone:	Phone:
	Fax:	Fax: