


# KEY-LOC SPECIFICATIONS

## PRODUCT SPECIFICATIONS

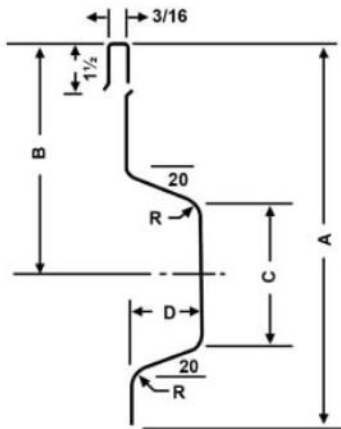

SLAB THICKNESS	A	B	C	D	R	KNOCK-OUT DIAMETER
3"	2 1/4"	1 1/2"	3/4"	3/8"	1/8"	N/A"
4"	3 1/8"	2"	1 3/32"	11/16"	3/16"	7/8"
5"	4 1/8"	2 1/2"	1 9/16"	3/4"	13/64"	7/8"
6"	5 1/8"	3"	1 15/16"	7/8"	7/32"	1 1/8"
8"	7 1/8"	4"	2 3/8"	1 1/16"	1/4"	1 1/8"
10"-12"	9 1/8"	5"	3 1/4"	1 1/8"	9/32"	1 1/8"

KNOCK-OUTS ON 6" CENTERS • KEY LOC STAKES 12", 15", 21", 24"

ASTM NUMBERS - KEY-LOC® Joint meets Crop of Engineers Specification "03300-Concrete for Building Construction" and has ASTM numbers of A653 for the joint and A569 for the stakes.