
Wood Framing, Siding, and Pallet Nails



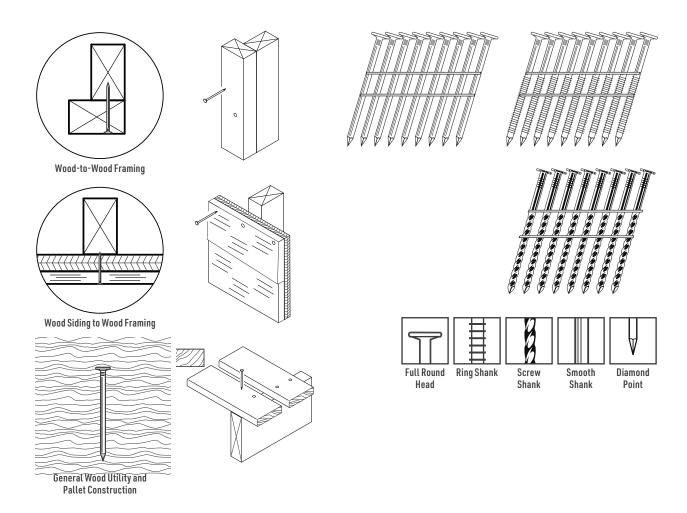

Description 15° Wire coil collated nails for framing, siding, and pallet construction.

Specifications

Size | Gauge: 0.083 in. to 0.131 in.

Length: 1 1/4 in. to 3 1/4 in. Head Type: Full Round

Shank Type: Ring, Screw, Smooth Finish: Bright, Electrogalvanized, Hot-Dip Galvanized, Stainless Steel,

Thermal Diffusion Galvanized

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM F1667 performance requirements.

Applications

- Wood-to-wood framing
- Wood siding to wood framing
- Pallet construction
- General wood utility construction

Installation


- Use with any 15° pneumatic coil nail gun.
- The head is fully seated when it is flush with the work surface.

Wood Framing, Siding, and Pallet Nails



Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
- Smooth shank penetrates the wood easily and smoothly.
- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
- Nails with screw or spiral shanks rotate during installation, increasing pull-out resistance.
- Diamond point is designed to easily drive into wood, and it helps prevent splitting.



Product Dimensions

B Head Diameter	Wire Diameter	Shank Type
0.213 in.	0.083 in.	Ring
0.213 in.	0.083 in.	Screw
0.220 in.	0.084 in.	Screw
0.220 in.	0.086 in.	Screw
0.220 in.	0.090 in.	Ring
0.220 in.	0.090 in.	Ring
0.220 in.	0.090 in.	Screw
0.220 in.	0.092 in.	Ring
0.220 in.	0.092 in.	Smooth
0.220 in.	0.093 in.	Ring
0.248 in.	0.099 in.	Smooth
0.260 in.	0.099 in.	Ring
0.260 in.	0.099 in.	Screw
0.276 in.	0.113 in.	Ring
0.276 in.	0.113 in.	Screw
0.276 in.	0.113 in.	Smooth
0.276 in.	0.120 in.	Ring
0.276 in.	0.120 in.	Screw
0.276 in.	0.120 in.	Smooth
0.276 in.	0.131 in.	Ring
0.276 in.	0.131 in.	Screw
0.276 in.	0.131 in.	Smooth

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Bright								
14 Gauge								
WC114083RGBR	1 1/4 in.	Round	0.213 in.	0.083 in.	Ring	14,000	29 lb.	
WC112083RGBR	1 1/2 in.	Round	0.213 in.	0.083 in.	Ring	14,000	34 lb.	
WC112084SCBR	1 1/2 in.	Round	0.220 in.	0.084 in.	Screw	14,000	35 lb.	
WC134083SCBR	1 3/4 in.	Round	0.213 in.	0.083 in.	Screw	14,000	39 lb.	Pallet/Utility Nails
WC134084SCBR	1 3/4 in.	Round	0.220 in.	0.084 in.	Screw	14,000	40 lb.	- Hullo
WC134086SCBR	1 3/4 in.	Round	0.220 in.	0.086 in.	Screw	14,000	42 lb.	
WC200084SCBR	2 in.	Round	0.220 in.	0.084 in.	Screw	9,000	29 lb.	_
12.5 Gauge								
WC112099SCBR	1 1/2 in.	Round	0.260 in.	0.099 in.	Screw	12,000	42 lb.	
GAC4DS	1 1/2 in.	Round	0.248 in.	0.099 in.	Smooth	12,000	41 lb.	Pallet/Utility Nails
WC134099SCBR	1 3/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	36 lb.	- Null3
WC134099SCBRHL	1 3/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	36 lb.	High Load, Pallet/Utility Nails
WC200099SCBR	2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	41 lb.	Siding Nails
WC200099SCBRHL	2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	41 lb.	High Load, Siding Nails
WC200090SCBR	2 in.	Round	0.220 in.	0.090 in.	Screw	9,000	34 lb.	Pallet/Utility Nails
WC214099SCBR	2 1/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	45 lb.	Siding Nails
WC214099RGBR	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	9,000	45 lb.	Siulity Maits
GAC7DS	2 1/4 in.	Round	0.248 in.	0.099 in.	Smooth	9,000	46 lb.	Pallet/Utility Nails
WC212099SCBR	2 1/2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	50 lb.	Siding Nails
WC212099SCBRHL	2 1/2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	50 lb.	High Load, Siding Nails
12 Gauge								
WC200113RGBR	2 in.	Round	0.276 in.	0.113 in.	Ring	9,000	54 lb.	_
WC214113SCBR	2 1/4 in.	Round	0.276 in.	0.113 in.	Screw	6,750	44 lb.	
WC238113RGBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing Nails
WC238113RB45	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,500	32 lb.	
WC238113RSBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	
WC238113RGBRH	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,700	28 lb.	Siding Nails
WC238113BR	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	4,000	28 lb.	Framing Nails
11 Gauge								
WC234120SCBR	2 3/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	36 lb.	- - Framing Nails -
WC300120RGBR	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
WC300120SCBR	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
WC300120BR	3 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	39 lb.	
WC314120SCBR	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	
WC314120BR	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	42 lb.	

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Bright (continued)								
10 Gauge								
WC212131RSBR	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	4,500	44 lb.	
WC212131BR	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	44 lb.	
WC300131SCBR	3 in.	Round	0.276 in.	0.131 in.	Screw	4,000	46 lb.	
WC300131BR	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	Framing Nails
WC300131BR45	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,500	52 lb.	
WC300131BRH	3 in.	Round	0.276 in.	0.131 in.	Smooth	2,400	28 lb.	-
WC314131SCBRH	3 1/4 in.	Round	0.276 in.	0.131 in.	Screw	2,700	50 lb.	High Load, Framing Nails
WC314131BR	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	J
WC314131BR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,500	56 lb.	Framing Nails
WC312131BR	3 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	39 lb.	
Hot-Dip Galvanized								
13 Gauge								
WC112092RGHDG	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	11 lb.	Pallet/Utility Nails
WC112093RGHDG	1 1/2 in.	Round	0.220 in.	0.093 in.	Ring	3,600	13 lb.	
WC134092RGHDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC134092RSHDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC200092RGHDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200092RSHDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	Siding Nails
WC214092RGHDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092HDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC212092RGHDG	2 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	17 lb.	-
12.5 Gauge						.,		
WC200099RGHDG	2 in.	Round	0.260 in.	0.099 in.	Ring	9,000	41 lb.	
WC214099RSHDG	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	9,000	45 lb.	Siding Nails
WC214099SCHDG	2 1/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	45 lb.	oranig realis
WC238099SCHDG	2 3/8 in.	Round	0.260 in.	0.099 in.	Screw	4,000	21 lb.	
WC238099RGHDG	2 3/8 in.	Round	0.260 in.	0.099 in.	Ring	4,000	21 lb.	Framing Nails
12 Gauge	2 0/0 1111	Round	0.200 iii.	0.077 111.	iting	4,000	21 (0.	
WC200113HDG	2 in.	Round	0.276 in.	0.113 in.	Smooth	2,700	24 lb.	
WC238113HDGH	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	2,700	28 lb.	Siding Nails
WC238113RGHDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing Nails
WC212131RGHDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	3,600	39 lb.	Siding Nails
11 Gauge	2 1/2 111.	Round	0.270 111.	0.101 III.	Killy	0,000	07 (0.	Ording Haits
WC300120RGHDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	Framing Nails
WC300120RGHDGH	3 in.	Round	0.276 in.	0.120 in.	Ring	2,400	23 lb.	High Load, Framing Nails
WC314120RGHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	42 lb.	3
WC314120SCHDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	Framing Nails
WC314120HDG	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	45 lb.	3
10 Gauge	2					.,		
WC212131HDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	39 lb.	
WC300131HDG	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
WC314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	Framing Nails
WC314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	-

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Thermal Diffusion Ga	lvanized							
13 Gauge								
WC134092RSTDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	Siding Nails
WC134092RGTDG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	13 lb.	
WC200092RGTDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200099RGTDG	2 in.	Round	0.220 in.	0.092 in.	Ring	9,000	41 lb.	
WC214092RGTDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
12 Gauge								
WC238113RGTDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing Nails
11 Gauge								
WC300120RGTDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	Framing Nails
Electrogalvanized								
13 Gauge								
WC134092RGEG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	31 lb.	
WC200092RGEG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200099RGEG	2 in.	Round	0.260 in.	0.099 in.	Ring	9,000	41 lb.	
WC214092RGEG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	Siding Nails
WC214092RGEG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092EG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC214092EG9M	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	9,000	39 lb.	
12 Gauge								
WC238113RGEG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,500	31 lb.	Framing Nails
WC238113RGEG4	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	rialling Naits
11 Gauge								
WC300120RGEG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,500	44 lb.	Framing Nails
WC300120SCEG	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	r raining waits
10 Gauge								
WC212131RGEG	2 1/2 in.	Round	0.276 in.	0.131 in.	Ring	4,500	44 lb.	
WC314131EGR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,500	56 lb.	Framing Nails
WC314131EGR45M	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,500	56 lb.	

Wood Framing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Stainless Steel								
13 Gauge								
WC112092RGSS	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	900	4 lb.	
SSWC112093RG	1 1/2 in.	Round	0.220 in.	0.093 in.	Ring	3,600	17 lb.	Siding Nails
WC134090RGSS	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	16 lb.	
WC175090RSSS	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	13 lb.	Framing Naila
SSWC134090RG	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	9,000	40 lb.	Framing Nails
SSWC2316090RG	2 3/16 in.	Round	0.220 in.	0.090 in.	Ring	9,000	50 lb.	Framing Nails
WC214090RGSS	2 1/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	17 lb.	Siding Nails
12.5 Gauge								
WC175099RSSS	1 3/4 in.	Round	0.260 in.	0.099 in.	Ring	3,600	15 lb.	Framing Nails
WC200099RGSS	2 in.	Round	0.260 in.	0.099 in.	Ring	3,600	16 lb.	Siding Nails
WC225099RSSS	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	3,600	18 lb.	Framing Nails
12 Gauge								
SSWC238113RG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	1,000	7 lb.	Framing Nails
11 Gauge								
SSWC300120RG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	40 lb.	Framing Naila
SSWC314120RG	3 1/4 in.	Round	0.276 in.	0.120 in.	Ring	4,000	42 lb.	Framing Nails

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

15° Wire Coil Collated Nails PS1070 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC. 5255 W 11000 N., STE 100 HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before









