
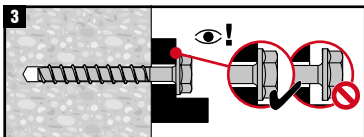


KH-EZ 3/8"	h_1^*	$h_{nom1} = 1.625"$	$h_{nom2} = 2.5"$	$h_{nom3} = 3.25"$	$h_{nom4} = 4.5"$
		$t_{fix1} \text{ max}$	$t_{fix2} \text{ max}$	$t_{fix3} \text{ max}$	$t_{fix4} \text{ max}$
3/8" x 1 7/8"	2 1/8" - t_{fix}	1/4"	-	-	-
3/8" x 2 1/8"	2 3/8" - t_{fix}	1/2"	-	-	-
3/8" x 3"	3 1/4" - t_{fix}	1 3/8"	1/2"	-	-
3/8" x 3 1/2"	3 3/4" - t_{fix}	1 7/8"	1"	1/4"	-
3/8" x 4"	4 1/4" - t_{fix}	2 3/8"	1 1/2"	3/4"	-
3/8" x 5"	5 1/4" - t_{fix}	3 3/8"	2 1/2"	1 3/4"	1/2"

		$h_{nom} < 2 1/8"$		$h_{nom} \geq 2 1/8"$	
	Nuron SID 6-22				
	Nuron SIW 4-22				
	CPC SID 4-22/18-A				
	CPC SIW 22/18-A				
		19 ft-lb	40 ft-lb	10 ft-lb	

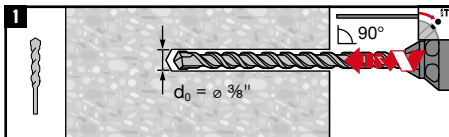

*For non-hole cleaning installation (step 1), make sure to drill deep enough to achieve h_1 , taking into account the depth of debris remaining in the hole.