




Crowne Slate™

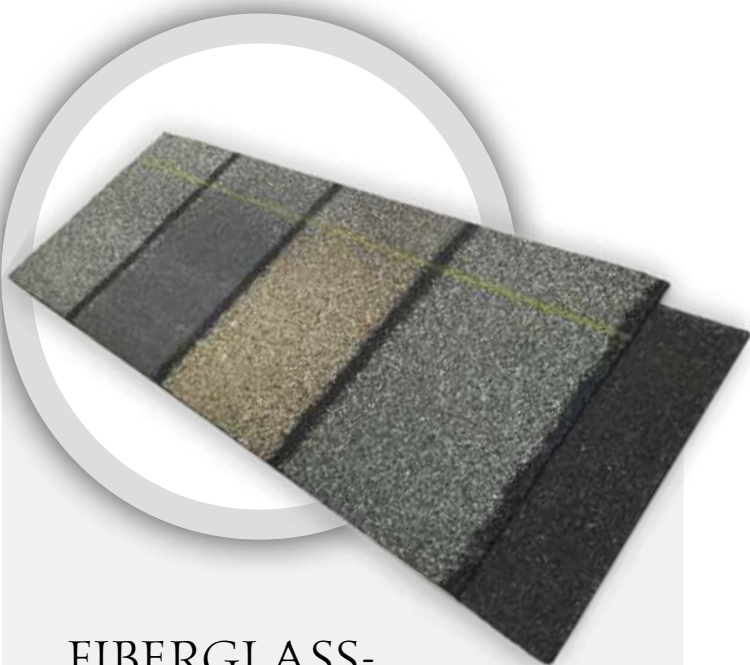

FIBERGLASS-REINFORCED ASPHALT SHINGLES

IKO Crowne Slate designer shingles are inspired by natural slate tiles. Their sharp definition, precise, square-cut contours and generous 10-inch exposure create an impressive look that monochromatic metal roofing or clay tiles can't achieve. They're so tough, they carry a Class 4 Impact Resistance rating.¹ Unlike commodity laminated shingles, which comprise of two layers in only half the exposed shingle area, Crowne Slate is manufactured with two full layers of shingle material laminated together for the ultimate in protection.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



Crowne Slate is a laminated two-layer asphalt shingle, manufactured on a robust fiberglass reinforcement.

FEATURES AND BENEFITS

- ✓ IKO'S LARGEST SHINGLE COVERAGE
- ✓ BLUE-GREEN ALGAE RESISTANT
- ✓ UNIQUE SHIPLAP FEATURE
- ✓ FULL TWO-LAYER DESIGN
- ✓ CLASS 4 IMPACT RESISTANCE¹

GENERAL INFORMATION

SHINGLES/BUNDLE	10
COVERAGE/BUNDLE	25.0 ft. ² (2.3 m ²)
COVERAGE/FOUR BUNDLES	100 ft. ² (9.29 m ²)
BUNDLES/PALLET	60
PALLET SIZE	40 x 53 1/2 in. (102 x 136 cm)
PRODUCT STOCK NO.	4450XXX

NOTE: XXX refers to numerical product color code. Product color availability varies by region.

PRODUCT DIMENSIONS

LENGTH	39 1/2 in. (1,003 mm)
WIDTH	13 1/4 in. (336 mm)
EXPOSURE	10 in. (254 mm)
SHIPLAP	3 1/2 in. (89 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.



Crowne Slate™

APPLICABLE STANDARDS²

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test³

UL 790 Class A Fire Test³

CAN/ULC S107 Class A Fire Test (Canada)³

FM 4473 Class 4 Impact Resistance Test¹

CSA A123.5 Product Standard (Canada)

Miami-Dade Product Approval⁴ [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval⁴ [here](#)

Texas Department of Insurance Details [here](#)

NOTE: IKO Crowne Slate asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture, including minimum total product weight, minimum tear-strength resistance, maximum granule loss and minimum asphalt mass.



SAFETY INFORMATION

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).



SHINGLE INSTALLATION

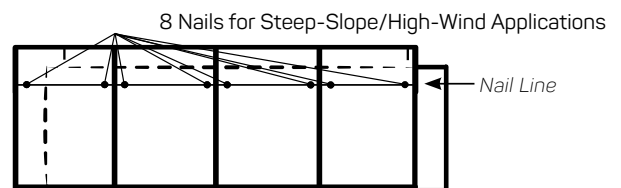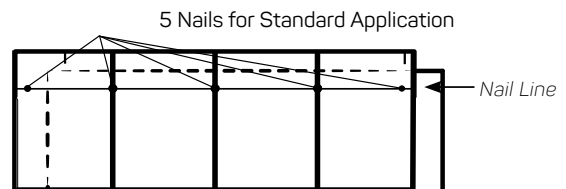

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Due to Crowne Slate's unique shiplay feature, installation must begin at the lower left corner of the roof.
3. Shingles should be installed with a 10-inch shingle exposure to the weather.
4. Follow the correct offset dimensions in the shingle installation instructions.
5. For optimal wind resistance, add a spot of cement on the overlap area at the time of installation.
6. Nails should be located in the nail line.
7. Open metal valleys are recommended for best roof system performance.
8. Never apply Crown Slate shingles to roof slopes less than 4:12

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF** (1-888-456-7663); **Canada 1-855-IKO-ROOF** (1-855-456-7663).

¹The Impact Resistance rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer, and damage from hail is not covered under the Limited Warranty. For further details concerning the FM 4473 standards, visit the FM Approvals website. ²Compliance with listed product standards is based on sampling and testing of products as manufactured. ³When shingles are installed over an approved underlayment. ⁴M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. For more information, please contact IKO at: **1-888-IKO-ROOF** (1-888-456-7663).