
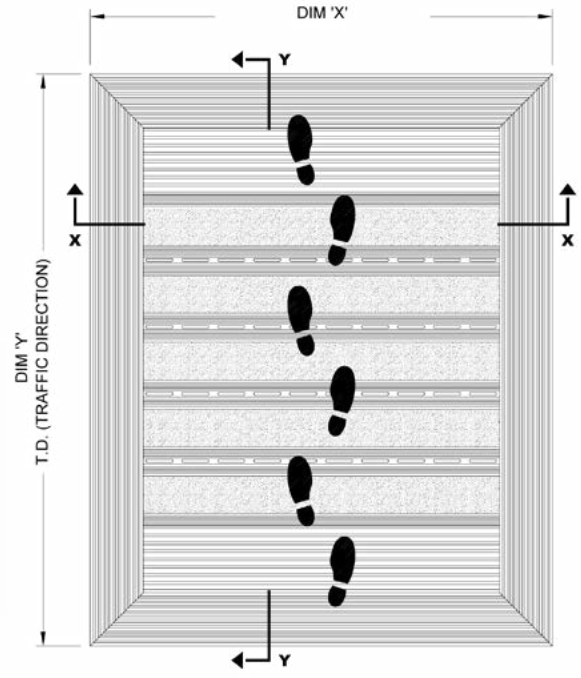


ENTRANCE MAT - Activ-Mat™ EM800 Series with EFSA8 Frame - Aluminum Mat with Surface Mount Aluminum Frame

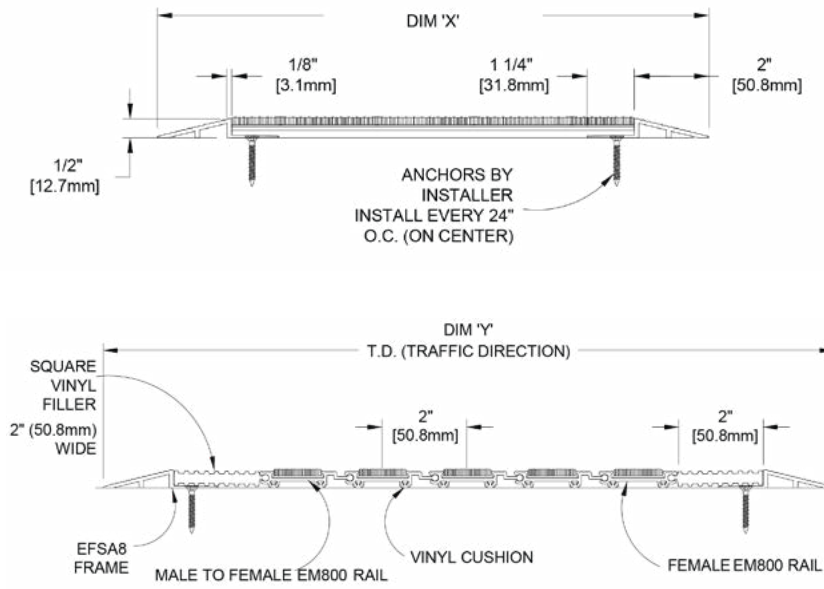


SPECIFICATIONS:

- Aluminium Roll-Up Entrance Mat with Aluminum Hinges**
- Rail Material: 6063-T6 extruded aluminum alloy.
- Frame Material: 6063-T5 extruded aluminum alloy.
- Depth: 3/8" (9.5 mm).
- Frame Width: 2" (50.8mm)
- Standard Finish: Mill.
- Tread Spacing: 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.
- Spacing Between Rails: Heelproof spacing of 3/16".
- Rolling Wheel Load Rating: 350 lbs

NOTE:

- Verify traffic direction - traffic to run perpendicular to rails.
- Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
- If multiple sections, verify sectioning does not occur in traffic path.
- Vinyl filler to be trimmed in field for tight fit.
- Additional product information including installation instructions may be found on our website.

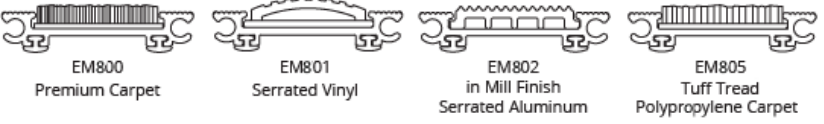

QTY	LOCATION	DIMENSION "X" <small>Width</small>	DIMENSION "Y" <small>Length</small>	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES

<p>JL INDUSTRIES 9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide</p>	<p>800-554-6077</p> <p>sales@activarcpg.com</p> <p>www.activarcpg.com</p>	<p>Distributor:</p> <p>Contractor:</p> <p>Date:</p> <p>Scale: N/A</p>	<p>Project:</p> <p>Approved By:</p> <p>Architect:</p> <p>Item #:</p>
	<p>Pages: 1 of 1</p>		