

ENTRANCE MAT - Activ-Mat™ EM800 Series with EFSV8 Frame - Aluminum Mat with Surface Mount Vinyl Frame

SPECIFICATIONS:

Aluminium Roll-Up Entrance Mat with Aluminum Hinges

Rail Material: 6063-T6 extruded aluminum alloy.

Frame Material: Vinyl tapered frame.

Depth: 3/8" (9.5 mm).

Frame Width: 2" (50.8mm)

Standard Finish: Mill.

Tread Spacing: 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Rails: Heelproof spacing of 3/16"

Rolling Wheel Load Rating: 350 lbs

NOTE:




Verify traffic direction - traffic to run perpendicular to rails.

Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found on our website.

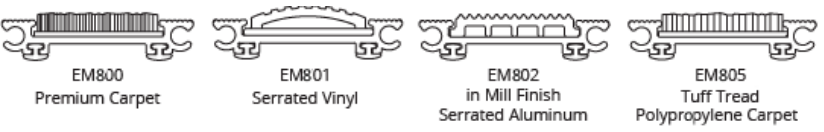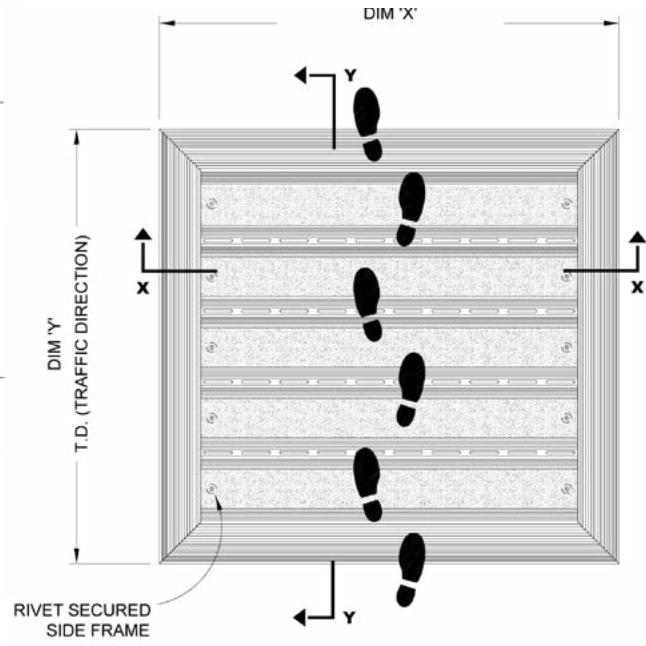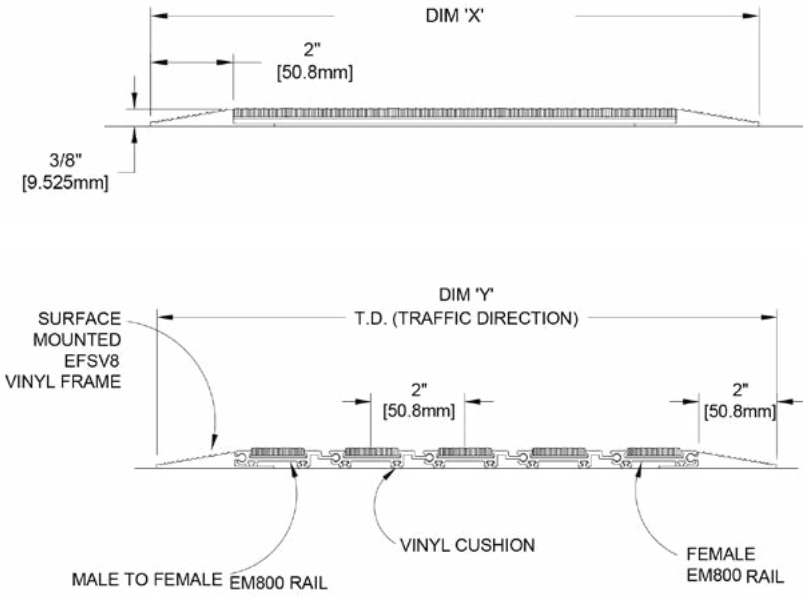

QTY	LOCATION	DIMENSION "X" <small>Width</small>	DIMENSION "Y" <small>Length</small>	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES

<p>JL INDUSTRIES 9702 Newton Ave S. Bloomington, MN 55431 Many Locations Nationwide</p>	<p>800-554-6077</p> <p>sales@activarcpg.com</p> <p>www.activarcpg.com</p>	<p>Distributor:</p>	<p>Project:</p>
	<p>Contractor:</p>	<p>Approved By:</p>	
	<p>Date:</p>	<p>Architect:</p>	
	<p>Scale: N/A</p>	<p>Pages: 1 of 1</p>	<p>Item #:</p>