## SUBMITTAL: EXTERIOR ACCESS PANEL XPEA™ AND XPES™ SERIES, PLASTER

Select this gasketed and insulated access panel with a door that opens to 170° for exterior applications.

#### **STEP 1 SELECT MODEL:**

#### Model XPEA - R value 5.7

Frame: 16 ga. Galvanneal steel with plaster flange recessed 3/4"; 2-3/4" wide galvanized expanded metal lath.

Door: 2" Thick with fiberglass insulation, .040 aluminum door with continuous stainless steel hinge. Gaskets: Adhesive-backed EPDM foam and silicone rubber seals on frame and door.

Finish: White powder coat paint.

Handle: (H2) Non-locking, plastic with chrome finish.

#### Model XPES Stainless Steel - R value 5.7

Frame: 16 ga. 304 stainless steel with plaster flange recessed 3/4"; 2-3/4" wide galvanized expanded metal lath.

Door: 2" Thick with fiberglass insulation, 20 ga. 304 stainless steel with continuous stainless steel hinge.

Finish: 304 Stainless - No. 4 finish

Gasket: Adhesive-backed EPDM foam and silicone rubber seals on frame and door.

Handles: (H2) Non-locking, plastic with chrome finish.

#### STEP 2 SELECT SIZE FROM TABLE BELOW OR ENTER OTHER SIZE:

Sizes: ORDER SIZE IS DOOR SIZE. Minimum 8" x 8". Maximum size 48" x 48". \_\_\_\_ Other Size \_\_\_\_ W x \_\_\_ H

## STEP 3 SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

(H3) Locking, plastic with chrome	finish.
(H4) Removable flush locking han	dle

Optional	color	code-	see	colors	below
----------	-------	-------	-----	--------	-------

IONAL COST									
W (White)	B (Bronze)	R (Red)	BK (Black)	S (Sand)	AB (AMS Beige)	SB (SC Beige)	<b>G</b> (Gray)	SI (Silver)	

**XPEA** 

**XPEA** 

**XPES** 

Color

(XPA)

Order Format Example: XPEA-1212H2W


Lock

(H2 std)

H3 or H4

	•								
QTY	Size (A) Frame ID Width x Height	Wall Opening	Handles	Approx Ship Weight in lbs.	QTY	Size (A)	Wall Opening (C) Width x Height	Handles	Approx Ship Weight in lbs.
	12" x 12"	12-3/8" x 12-3/8"	1	11		24" x 30"	24-3/8" x 30-3/8"	2	40
	14" x 14"	14-3/8" x 14-3/8"	1	15		24" x 36"	24-3/8" x 36-3/8"	2	42
	18" x 18"	18-3/8" x 18-3/8"	1	19		24" x 48"	24-3/8" x 48-3/8"	2	57
	20" x 24"	20-3/8" x 24-3/8"	1	30		30" x 30"	30-3/8" x 30-3/8"	2	44
	20" x 30"	20-3/8" x 30-3/8"	2	32		30" x 36"	30-3/8" x 36-3/8"	2	56
	22" x 30"	22-3/8" x 30-3/8"	2	34		36" x 36"	36-3/8" x 36-3/8"	2	61
	22" x 36"	22-3/8" x 36-3/8"	2	40		36" x 48"	36-3/8" x 48-3/8"	2	75
	2Δ" x 2Δ"	24-3/8"x 24-3/8"	1	27		48" x 48"	48-3/8" x 48-3/8"	2	108


It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.



# SUBMITTAL: EXTERIOR ACCESS PANEL XPEA™ AND XPES™ SERIES, PLASTER PAGE 2 of 2



Example of XPEA Installed in Stucco Wall

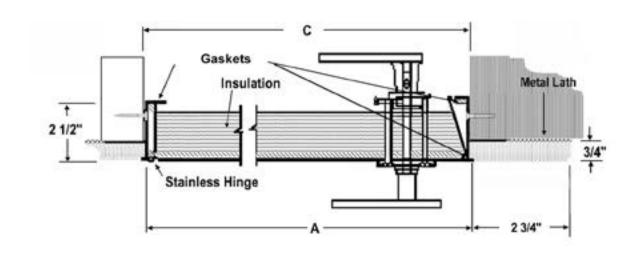

### **LATCH AND LOCK OPTIONS**



H2 Non-Locking Handle (Standard)



H3 Locking Handle





(H4) Removable Flush Locking Handle



Inside Latch for (H4) Removable Flush Locking Handle