

SUBMITTAL: EXTERIOR ACCESS PANEL XTEA™ and XTES™, PLASTER

Select this new exterior access panel design with energy efficiency in mind. 2 inches of polyisocyanurate provides an R-value of 13, and dual layered gasketing provides the weather-resistance you need. Opens to 170°.

STEP 1: SELECT MODEL

 Model XTEA (Galvannealed and Aluminum)

Frame: 16 ga. Galvannealed steel frame with flange recessed 3/4". 2-3/4" wide galvanized expanded metal lath
 Door: 2" Thick Polyisocyanurate Insulation, .040 Aluminum door panel with continuous stainless.
 Hinge and R value 13.0
 Gaskets: Adhesive backed EPDM foamed silicone rubber seal on frame and door
 Finish: White powder coat paint
 Handle: (F4) Lockable compression paddle latch, black

 Model XTES (Stainless Steel)


Frame: 16 ga. Stainless Steel Frame
 Door: 2" Thick Polyisocyanurate insulation, 20 ga. Stainless steel door with continuous hinge and R value of 13.0
 Gaskets: Adhesive backed EPDM foamed silicone rubber seal on frame and door
 Finish: 304 Stainless - No. 4 Finish
 Handles: (F4) Lockable compression paddle latch, black



XTES with Optional Latch (F6)



XTEA with Standard Latch

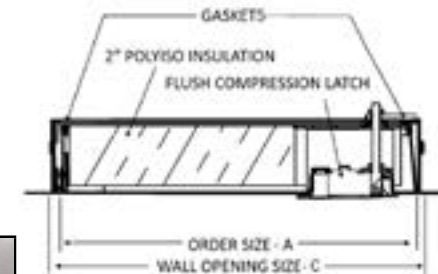

STEP 2: SELECT SIZE FROM TABLE BELOW OR ENTER OTHER SIZE

Sizes: ORDER SIZE IS DOOR SIZE. Minimum 8" x 8". Maximum 48" x 48".

STEP 3: SELECT OPTIONAL FEATURES AT ADDITIONAL COST

- (F6) Chrome lockable compression paddle latch
- Optional color code - See colors below

W (White)	B (Bronze)	R (Red)	BK (Black)	S (Sand)	AB (AMS Beige)	SB (SC Beige)	G (Gray)	SI (Silver)
-----------	------------	---------	------------	----------	----------------	---------------	----------	-------------

QTY	Size (A) Width x Height	Wall Opening (C) Width x Height	Handles	Approx Ship Weight in lbs.	QTY	Size (A)	Wall Opening (C)	Handles	Approx Ship Weight in lbs.
	12" x 12"	12-3/8" x 12-3/8"	1	9		24" x 30"	24-3/8" x 30-3/8"	2	37
	14" x 14"	14-3/8" x 14-3/8"	1	13		24" x 36"	24-3/8" x 36-3/8"	2	41
	18" x 18"	18-3/8" x 18-3/8"	1	17		24" x 48"	24-3/8" x 48-3/8"	2	54
	20" x 24"	20-3/8" x 24-3/8"	2	28		30" x 30"	30-3/8" x 30-3/8"	2	41
	20" x 30"	20-3/8" x 30-3/8"	2	31		30" x 36"	30-3/8" x 36-3/8"	2	56
	22" x 30"	22-3/8" x 30-3/8"	2	34		36" x 36"	36-3/8" x 36-3/8"	2	59
	22" x 36"	22-3/8" x 36-3/8"	2	39		36" x 48"	36-3/8" x 48-3/8"	2	74
	24" x 24"	24-3/8" x 24-3/8"	2	28		48" x 48"	48-3/8" x 48-3/8"	2	102
	Custom Size								

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

<p>800-554-6077 sales@activarcpg.com www.activarcpg.com</p>	Distributor:		Project:	
	Contractor:		Approved By:	
	Date:		Architect:	
	Scale: N/A	Pages: 1 of 1	Item #:	