


Meets the requirements of ASTM D 6164, Type II, Grade G

## Features and Components

**Reflective Roofing Granules:** Specifically engineered for high reflectivity, durability and optimal embedment in the SBS modified bitumen sheet.

**Elastomeric SBS Rubber and Asphalt Blend:** Provides full recovery properties after 100% elongation, and lends elasticity and flexibility to the sheet and contains fire-retardant additives.

**Heavy Duty Polyester Mat Reinforcement:** A tough, nonwoven polyester mat provides excellent tensile strength, toughness and puncture resistance, and can accommodate stresses created by typical rooftop expansion and contraction forces.

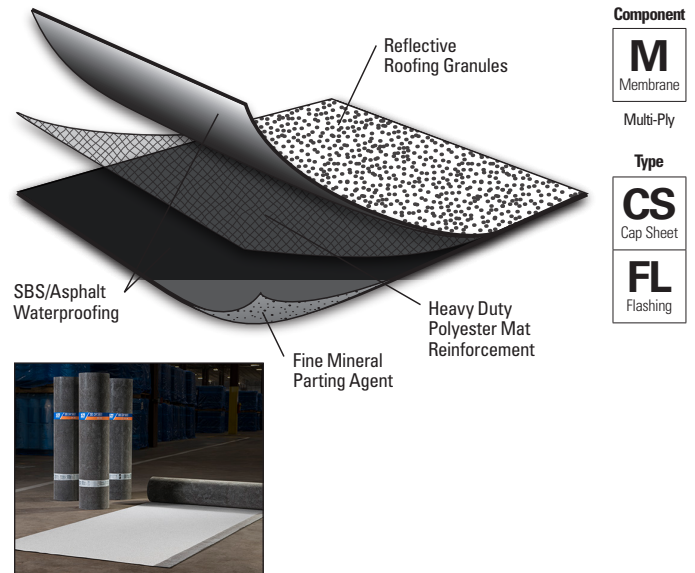

<b>Component</b>
<b>M</b> Membrane
Multi-Ply
<b>Type</b>
<b>CS</b> Cap Sheet
<b>FL</b> Flashing

**Color:** Bright white only

**System Compatibility** This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	HW	HA	CA	HW	SA	MF	

Compatible with the selected multi-ply systems above

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA

Do not use with single ply systems

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered

## Energy and the Environment

CRRC*	Test	Initial	3-Year Aged**
	Reflectivity (ASTM C 1549)	0.70	0.65
	Emissivity (ASTM C 1371)	0.90	0.91
Rated Product ID: 0662-0042c Licensed Manufacturer ID: 0662 Classification: Production Line			
LEED®	Solar Reflectance Index (SRI) - E 1980	85	80
	Recycled Content	0%	

\* Cool Roof Rating Council ratings are determined for a fixed set of conditions, and may not be appropriate for determining seasonal energy performance. The actual effect of solar reflectance and thermal emittance on building construction may vary.

Manufacturer of product stipulates that these ratings were determined in accordance with the applicable Cool Roof Rating normal procedures.

\*\* Tested in accordance with Rapid Ratings D7897.

CAN BE USED TO COMPLY WITH TITLE 24 PART 6 COOL ROOF REQUIREMENTS

## Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

\*Contact JM Technical Services for specific system requirements for guarantee lengths.

## Codes and Approvals



## Installation/Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

## Packaging and Dimensions

Roll Coverage*	95.8 ft <sup>2</sup> (8.9 m <sup>2</sup> )
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	107 lb (48.5 kg)
Rolls per Pallet	20
Pallet Weight	2,195 lb (995.6 kg)
Pallets per Truck**	20

\*Assumes a 4" side lap \*\*Assumes 48' flatbed truck.

## Storage

Shelf Life*	12 months
Storage Conditions*	Max temperature 120°F (48.8°C) and out of direct sunlight

\*Failure to follow recommended storage guidelines may lead to staining of bright white granules prior to installation.

**Meets the requirements of ASTM D 6164, Type II, Grade G**

**Tested Physical Properties**

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type II, Grade G (Min.)	DynaLastic 250 FR CR G	
				MD*	XMD**
Strength	Tensile Tear	D 5147	70 lbf (311 N)	181 lbf (805 N)	124 lbf (552 N)
	Peak Load at 0°F (-18°C)	D 5147	100 lbf (45 kgf)	184 lbf (84 kgf)	122 lbf (55 kgf)
	Peak Load at 73.4°F (23°C)	D 5147	70 lbf (32 kgf)	106 lbf (48 kgf)	84 lbf (38 kgf)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	165 mil (4.2 mm)	
	Selvage Edge Thickness	D 5147	N/A	134 mil (3.4 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	46%	54%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	50%	58%	71%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	60%	61%	76%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	100 lbf (45 kgf)	178 lbf (81 kgf)	119 lbf (54 kgf)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	49%	60%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	70 lbf (32 kgf)	133 lbf (60 kgf)	96 lbf (44 kgf)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	50%	58%	68%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	60%	60%	71%
Installation	Dimensional Stability	D 5147	1.0%	0.3%	0.1%
	Net Mass per Unit Area	D 146	90 lb/100 ft <sup>2</sup> (41 kg/9.29 m <sup>2</sup> )	90 lb/100 ft <sup>2</sup> (41 kg/9.29 m <sup>2</sup> )	
	Roll Weight	D 146	N/A	107 lb (48.5 kg)	

\*MD = Machine Direction

\*\*XMD = Cross-Machine Direction

Note: All data represents tested values.

**Supplemental Testing**

Physical Properties		ASTM Test Method	DynaLastic 250 FR CR G Result
Cyclic Joint Displacement	Initial	D 5849	Pass at 500 cycles*
	After 90-Day Heat Conditioning per ASTM D 5147	D 5849	Pass at 200 cycles*
Coefficient of Friction	Static	D 1894	1.34
	Kinetic	D 1894	1.06

\*In a min 2-ply system when adhered with any combination of cold applied, hot applied and or heat-weld that is approved by JM for application.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at [www.jm.com/roofing](http://www.jm.com/roofing). The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions).