

WEATHER PROTECTION & CONDENSATION PREVENTION

- Provides temporary weather protection for 90 days
- Tri-laminate woven film provides a non-slip surface
- High tensile strength and puncture resistance
- Low air and vapor permeability
- Self-adhering SBS allows for quick installation and dry-in



Features & Benefits



UV PROTECTED TOP SURFACE



SELF SEALING SBS ASPHALT
FORMULATION




SILICONE RELEASE FILM FOR
SELF-ADHESIVE APPLICATION

SELF-ADHERING AND SELF-SEALING

JM Vapor Barriers are composed of high-quality self-adhering SBS asphalt blends for self-sealing capabilities around fasteners and quick adhesion of laps without additional taping required.

LAYERS OF PROTECTION

A properly placed vapor barrier within the roofing system provides moisture protection and low air permeability for energy efficiency, maximizing the performance of your roofing system.

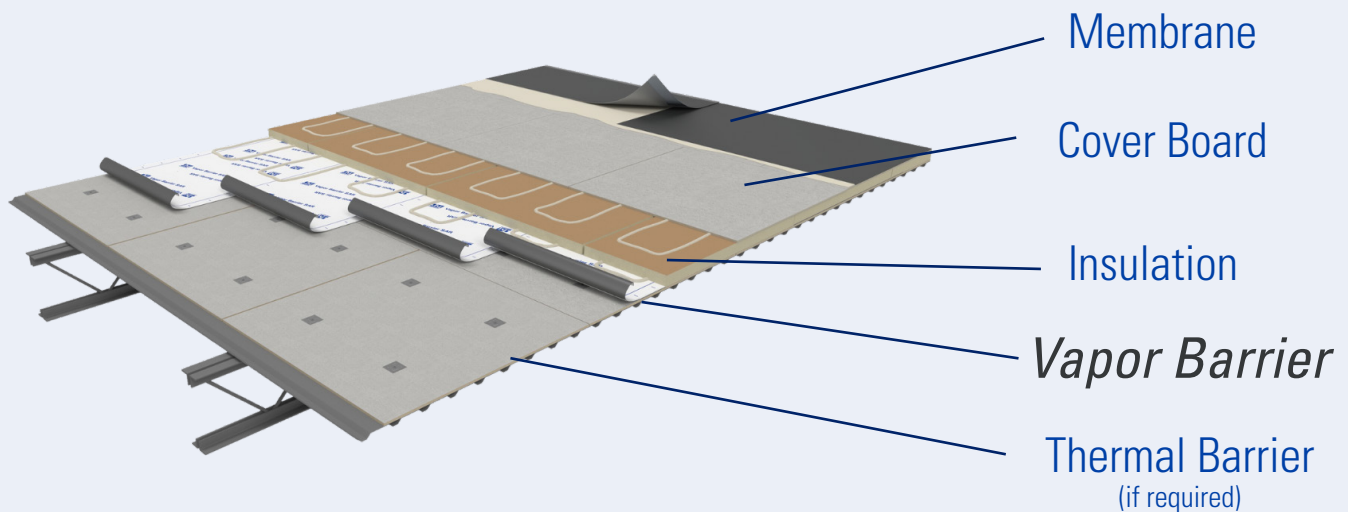

LEARN MORE ABOUT JM VAPOR BARRIERS AT JM.COM/ROOFING