




Product Description

MarinoWARE HOTROD® XL is a surface mounted fire-rated deflection bead tested to UL 2079. It provides 1 & 2 hour firestop solutions in joints for both standard wall and shaft wall types between flat concrete or fluted metal deck applications.

- **HOTROD XL** tested with up to 80% compression and 30% extension.
- **HOTROD XL** combines compressible foam, a vinyl concealment leg along and intumescent strip to provide an aesthetically pleasing joint.
- **HOTROD XL** provides a single step installation of both a code compliant firestop and finished drywall accessory in one piece.
- **HOTROD XL** is pink in color for ease of inspection.
- **HOTROD XL** installs on the face of the drywall with a perforated mud leg incorporated to accept joint compound.
- **HOTROD XL** can be used with CEMCO Spray-less Flute Clips to eliminate need for additional firestop sealant or spray.
- **HOTROD XL** easily installs using spray adhesive and staples.
- **HOTROD XL** installs fully cured and is paintable.
- **HOTROD XL** does not have temperature or humidity limits for installation.
- **HOTROD XL** provides Sound Transmission Classification (STC) ratings up to 68.

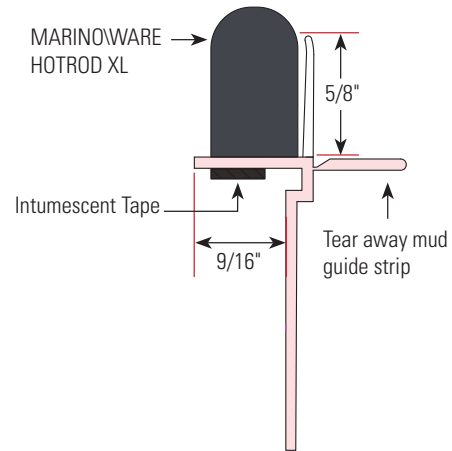

Ordering / Packaging


Description	Part Number	Size	Length	Pcs/Carton
HOTROD XL	HOTROD XL	1/2" x 3/4"	10'	10

Storage / Warranty:

- When stored indoors and kept dry in the original package, HOTROD XL will not deteriorate and has no expiration date.
- Sustainable Building Life-Cycle Warranty – see CEMCO Firestop Product Warranty for details.

ASTM & Code Standards

- ASTM E-84 ASTM E-90 ASTM E-119 ASTM E1966
- UL 263 UL 723 UL 2079 5th Edition UL ER25033-01
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: BW-S-0024; HW-D-0514, HW-D-0518; HW-D-0524; HW-D-0525; HW-D-0550; HW-D-0551; HW-D-0553; HW-D-0554; HW-D-0573; HW-D-0596; HW-D-0620; HW-D-0621; HW-D-0624; HW-D-0625
- U.S. Patent No. 9,683,364; 10,184,246; and 10,914,065

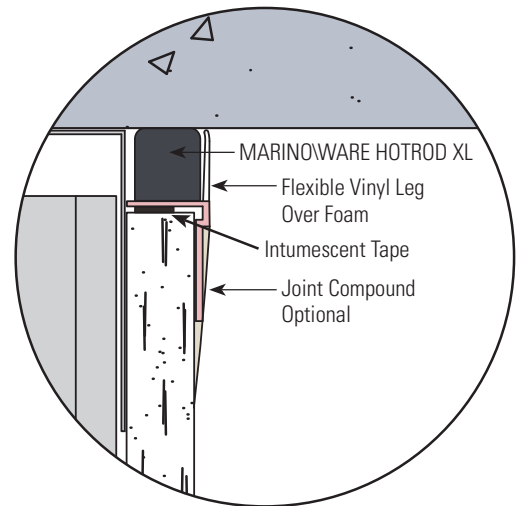

← Scan or click the code to view the installation video!



Scan or click → the code to view the installation guide!



For more information, please contact MarinoWARE® Technical Services at 866.545.1545

This technical information reflects the most current information available and supersedes any and all previous publications effective December 7, 2023 | MW-Joint Firestopping Catalog | ©WARE Industries, Inc. 2023