

Marino\WARE® Product Submittal Data

PRODUCT NAME: 1200JR250-68

05.42.00 Cold-Formed Metal Joist Framing

MARINO\WARE PART # 120RE14

PROPERTIES:

A. Web (in)	12"	Yield Strength Fy (KSI)	50
B. Flange (in)	2.5"	Tensile Strength Fu (KSI)	65
C. Lip (in)	0.75"	Design Thickness (in)	0.0713
Mils	68	Minimum Thickness (in)	0.0677
Available Finish	G60, G90	Gauge	14

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	3.37
Cross Sectional Area: A (in ²)	0.703
Moment of Inertia: I_x (in ⁴)	22.1
Section Modulus: S_x (in ³)	3.69
Radius of Gyration: R_x (in)	5.61
Gross Moment of Inertia: I_y (in ⁴)	0.567
Gross Radius of Gyration: R_y (in)	0.898

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: I_{xe} (in ⁴)	22.1
Section Modulus: S_{xe} (in ³)	3.31
Allowable Bending Moment: Ma (in-k)	93.4
Allowable Shear Force: Va (k)	1.66

TORSIONAL SECTION PROPERTIES



St. Venant Torsional Constant: J_{x1000} (in ⁴)	1.19
Torsional Warping Constant: C_w (in ⁶)	21.8
Radius of Gyration on the Centroid Principal axis: Ro (in)	6.06

CODES & STANDARDS

- AISI S100, S240 & ICC ES ESR-1741
- ASTM A 1003, A 653, & C 955
- IBC 2012, 2015, 2018, 2021, 2024
- FBC 2023 & 2022 NYC Building Code
- Tested to ASTM E 119, & E 492/E 989
- UL Fire Test Data: G560, G563, G564, G577, G588, G594, G597, H503, L567, L580, P546
- Intertek (Warnock Hersey) Fire Data: WHI 3099463, WHI 3101528

GREEN INFO

- LEED credits available
- Contact Technical Services for more information

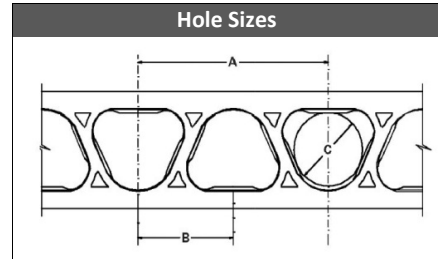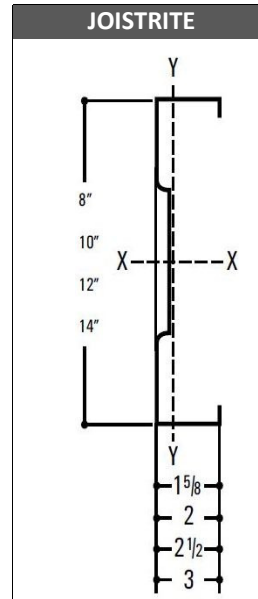

Section	A (in)	B (in)	C
8"	14	7	5.5
10"	28	14	7.2
12"	35	17.5	9.2
14"	35	17.5	9.2



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 9/25/2024
©Copyright 2024 by Ware Industries, Inc. All rights reserved

