

Marino\WARE® Product Submittal Data

PRODUCT NAME: 362QFH350-33


MARINO\WARE PART # 358QFH35033



PROPERTIES:

A. Web (in)	3-5/8	Yield Strength Fy (KSI)	33
B. Flange (in)	3-1/2	Tensile Strength Fu (KSI)	45
C. Lip (in)	1	Design Thickness (in)	0.0346
Mils	33	Minimum Thickness (in)	0.0329
Available Finish	G60, G90	Gauge	20 STR

05.40.00 Cold-Formed Metal Framing

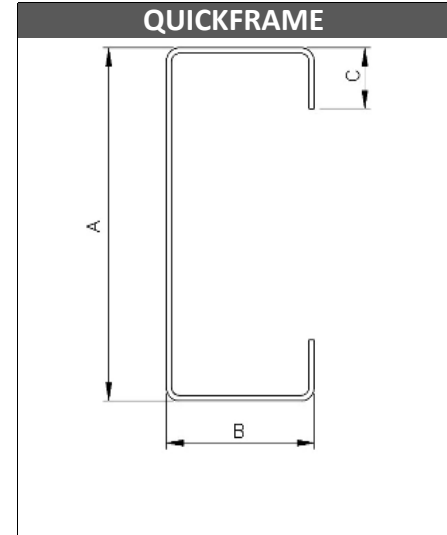

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	0.426
Weight of Member: (lb/ft)	1.45
Moment of Inertia: Ix (in ⁴)	1.01
Section Modulus: Sx (in ³)	0.557
Radius of Gyration: Rx (in)	1.54
Moment of Inertia: Iy (in ⁴)	0.778
Section Modulus: Sy (in ³)	0.393
Radius of Gyration: Ry (in)	1.35

EFFECTIVE SECTION PROPERTIES - Unpunched

Moment of Inertia-Deflection: Ixe (in ⁴)	0.852
Section Modulus: Sxe (in ³)	0.373
Allowable Bending Moment: Malx (in-k)	7.38
Allowable Bending Moment: Madx (in-k)	8.50
Moment of Inertia: Iye (in ⁴)	0.715
Section Modulus: Sye (in ³)	0.324
Allowable Bending Moment: Maly (in-k)	6.41
Allowable Bending Moment: Mady (in-k)	5.95
Allowable shear: Vag (k)	1.024

TORSIONAL SECTION PROPERTIES

St. Venant Torsional Constant: Jx1000 (in ⁴)	0.170
Torsional Warping Constant: Cw (in ⁶)	3.45
Shear Center to Centroid on Principal X-axis: Xo (in)	-3.47
Radius of Gyration on the Centroid Principal axis: Ro (in)	4.03
Torsional Flexural Constant: β = [1-(xo/Ro) ²]	0.258

* 33 mil and 43 mil calculated with the Direct Strength Method

CODES & STANDARDS

- AISI S100 & S240
- ASTM A 1003, A 653, & C 955
- IBC 2012, 2015, 2018, 2021

GREEN INFO

- LEED credits available
- Contact Technical Services for more information.



For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 8/02/2024
©Copyright 2024 by Ware Industries, Inc. All rights reserved