

Marino\WARE® Product Submittal Data

PRODUCT NAME: 400QFH300-43

MARINO\WARE PART # 400QFH30043



PROPERTIES:

A. Web (in)	4	Yield Strength Fy (KSI)	33
B. Flange (in)	3	Tensile Strength Fu (KSI)	45
C. Lip (in)	1	Design Thickness (in)	0.0451
Mils	43	Minimum Thickness (in)	0.0428
Available Finish	G60, G90	Gauge	18

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Cross Sectional Area: A (in ²)	0.526
Weight of Member: (lb/ft)	1.79
Moment of Inertia: Ix (in ⁴)	1.45
Section Modulus: Sx (in ³)	0.724
Radius of Gyration: Rx (in)	1.66
Moment of Inertia: Iy (in ⁴)	0.726
Section Modulus: Sy (in ³)	0.414
Radius of Gyration: Ry (in)	1.17

EFFECTIVE SECTION PROPERTIES - Unpunched

Moment of Inertia-Deflection: Ixe (in ⁴)	1.37
Section Modulus: Sxe (in ³)	0.592
Allowable Bending Moment: Max (in-k)	11.7
Allowable Bending Moment: Madx (in-k)	12.7
Moment of Inertia: Iye (in ⁴)	0.701
Section Modulus: Sye (in ³)	0.365
Allowable Bending Moment: Maly (in-k)	7.21
Allowable Bending Moment: Mady (in-k)	7.36
Allowable shear: Vag (k)	1.739

TORSIONAL SECTION PROPERTIES

St. Venant Torsional Constant: Jx1000 (in ⁴)	0.357
Torsional Warping Constant: Cw (in ⁶)	3.63
Shear Center to Centroid on Principal X-axis: Xo (in)	-2.90
Radius of Gyration on the Centroid Principal axis: Ro (in)	3.54
Torsional Flexural Constant: β = [1-(xo/Ro) ²]	0.330

* 33 mil and 43 mil calculated with the Direct Strength Method


CODES & STANDARDS

- AISI S100 & S240
- ASTM A 1003, A 653, & C 955
- IBC 2012, 2015, 2018, 2021

GREEN INFO

- LEED credits available
- Contact Technical Services for more information

05.40.00 Cold-Formed Metal Framing

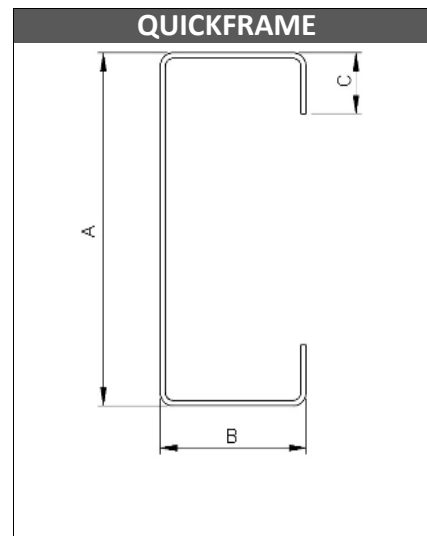

www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 8/02/2024
© Copyright 2024 by Ware Industries, Inc. All rights reserved