

# Marino\WARE® Product Submittal Data

**PRODUCT NAME:** 600T300-97

**05.40.00 Cold-Formed Metal Framing**

**MARINO\WARE PART #**

**PROPERTIES:**

<b>A. Web (in)</b>	6	<b>Yield Strength Fy (KSI)</b>	50
<b>B. Flange (in)</b>	3	<b>Tensile Strength Fu (KSI)</b>	65
<b>Mils</b>	97	<b>Design Thickness (in)</b>	0.1017
<b>Available Finish</b>	G90	<b>Minimum Thickness (in)</b>	0.0966
		<b>Gauge</b>	12

**SECTION PROPERTIES**

**GROSS SECTION PROPERTIES**

Cross Sectional Area: <b>A</b> (in <sup>2</sup> )	1.218
Weight of Member: (lb/ft)	4.14
Moment of Inertia: <b>Ix</b> (in <sup>4</sup> )	7.763
Section Modulus: <b>Sx</b> (in <sup>3</sup> )	2.4429
Radius of Gyration: <b>Rx</b> (in)	2.5245
Gross Moment of Inertia: <b>Iy</b> (in <sup>4</sup> )	1.097
Gross Radius of Gyration: <b>Ry</b> (in)	0.949

**EFFECTIVE SECTION PROPERTIES**

Moment of Inertia-Deflection: <b>Ix</b> (in <sup>4</sup> )	6.202
Section Modulus: <b>Sx</b> (in <sup>3</sup> )	1.728
Allowable Bending Moment: <b>Ma</b> (in-k)	51.76
Allowable strong axis shear away from punch: <b>Vag</b> (lb)	10885

**TORSIONAL SECTION PROPERTIES**


St. Venant Torsional Constant: <b>Jx1000</b> (in <sup>4</sup> )	3.576
Torsional Warping Constant: <b>Cw</b> (in <sup>6</sup> )	4.913
Shear Center to Centroid on Principal X-axis: <b>Xo</b> (in)	-1.86

**CODES & STANDARDS**

- AISI S100-12 & ICC ES ESR-4062
- Meets IBC 2012, 2015 & FBC 2014
- Framing meets ASTM A 1003, A 653, C 645 & C 955

**GREEN INFO**

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information.

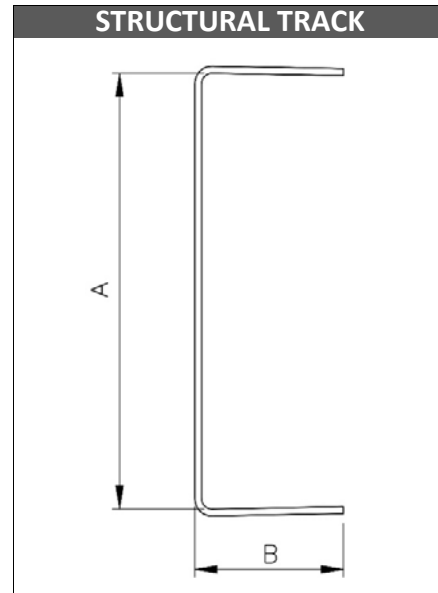

**For more information, please contact Marino\WARE Technical Services at 866-545-1545.**

This technical information reflects the most current information available and supersedes any and all publications, effective 1/5/2017.  
©Copyright 2017 by Ware Industries, Inc. All rights reserved