

# Marino\WARE® Product Submittal Data

**PRODUCT NAME:** 6 X 6 UTILITY ANGLE

**MARINO\WARE PART #** 600CJ16

## PROPERTIES:

Leg A (in)	6	Yield Strength Fy (KSI)	50
Leg B (in)	6	Tensile Strength Fu (KSI)	65
Mils	54	Design Thickness (in)	0.0566
Available Finish	G40, G60, G90	Minimum Thickness (in)	0.0538
		Gauge	16


## SECTION PROPERTIES

### GROSS SECTION PROPERTIES

Cross Sectional Area: <b>A</b> (in <sup>2</sup> )	0.6733
Weight of Member: <b>(lb/ft)</b>	2.2890
Moment of Inertia: <b>Ix</b> (in <sup>4</sup> )	4.0179
Section Modulus: <b>Sx-t</b> (in <sup>3</sup> )	0.9470
Section Modulus: <b>Sx-b</b> (in <sup>3</sup> )	0.9470
Gross Section Modulus: <b>Sy-l</b> (in <sup>3</sup> )	0.4721
Gross Section Modulus: <b>Sy-r</b> (in <sup>3</sup> )	0.4674
Gross Moment of Inertia: <b>Iy</b> (in <sup>4</sup> )	0.9920

## 05.40.00 Cold-Formed Metal Framing

### UTILITY ANGLE-10'

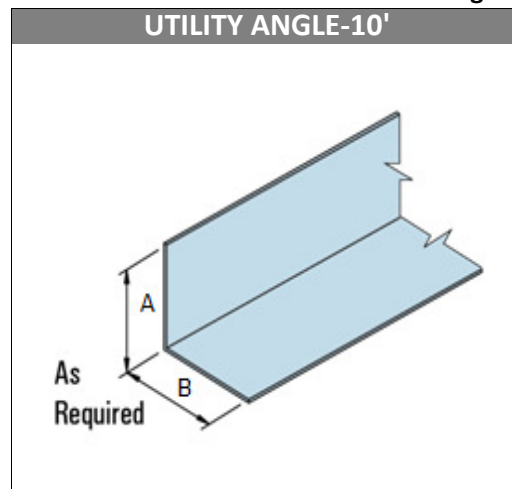

## CODES & STANDARDS

- AISI S100, IBC 20105, 2018, 2021 compliant
- ASTM C955 & AISI S240 (33 mil - 118 mil)
- ASTM C645 & AISI S220 (18 mil - 33 mil)
- Galvanized steel sheet meets ASTM A1003 or A653

## GREEN INFO

- LEED credits available
- Contact Technical Services for more information.



[www.marinoware.com](http://www.marinoware.com)

For more information, please contact Marino\WARE Technical Services at 866-545-1545.

This technical information reflects the most current information available and supersedes any and all publications, effective 4/5/2024  
©Copyright 2024 by Ware Industries, Inc. All rights reserved