

Marino\WARE® Product Submittal Data

PRODUCT NAME: 600VT250-30

MARINO\WARE PART # 600VT2530

PROPERTIES:

A. Web (in)	6	Yield Strength Fy (KSI)	33
B. Leg (in)	2-1/2	Design Thickness (in)	0.0312
Mils	30	Minimum Thickness (in)	0.0296
Finish*	G40	Gauge	20 DW

*Or other ASTM A1003 Table 1 Coating

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	1.170
Cross Sectional Area: A (in²)	0.344
Moment of Inertia: Ix (in⁴)	2.030
Section Modulus about the X-axis: Sx (in³)	0.659
Radius of Gyration: Rx (in)	2.430
Gross Moment of Inertia: Iy (in⁴)	0.211
Section Modulus about the Y-axis: Sy (in³)	0.110
Gross Radius of Gyration: Ry (in)	0.784

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: Ixd (in⁴)	1.330
Section Modulus: Sxe (in³)	0.275
Allowable Moment: Ma (in-k)	5.430

TORSIONAL PROPERTIES

Shear Center to Centroid on Principal X-axis: Xo (in)	-1.440
St. Venant Torsional Constant: Jx10³ (in⁴)	0.1120
Torsional Warping Constant: Cw (in⁶)	1.400
Radius of Gyration on the Centroid Principal axis: Ro (in)	2.930
Torsional Flexural Constant: β=1-(xo/Ro)²	0.758

CODES & STANDARDS


- Meets IBC 2009, 2012, 2015 & FBC 2017
- Meets or tested to: ASTM C 645, C 754, E 90, E 119 & AISI S220-11
- Galvanized steel sheet meets ASTM A 1003 & A 653
- Third Party Code Evaluation Report: ICC ES ESR#2620
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v3 & LEED v4 credits available
- Contact Technical Services for more information



09.22.16 Non-Structural Metal Stud

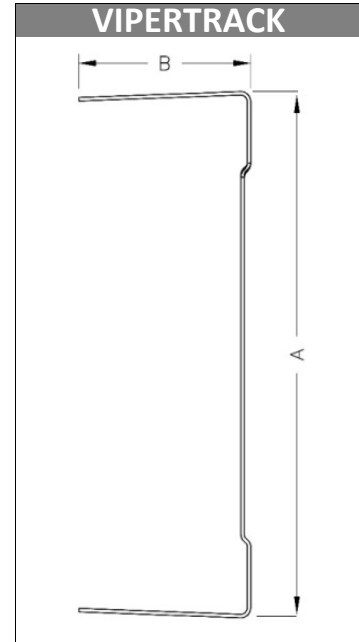

www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 01/30/18.

©Copyright 2018 by Ware Industries, Inc. All rights reserved