

Marino\WARE® Product Submittal Data

PRODUCT NAME: 162VS125-33

MARINO\WARE PART # 158VS33

PROPERTIES:

A. Web (in)	1-5/8	Yield Strength Fy (KSI)	33
B. Flange (in)	1-1/4	Design Thickness (in)	0.0346
C. Lip (in)	1/4"	Minimum Thickness (in)	0.0329
Mils	33	Gauge	20 STR
Finish*	G40EQ		

* Or other ASTM A1003 Table 1 Coating

SECTION PROPERTIES

GROSS SECTION PROPERTIES

Weight of Member: (lb/ft)	0.500
Cross Sectional Area: A (in ²)	0.147
Moment of Inertia: I_x (in ⁴)	0.069
Radius of Gyration: R_x (in)	0.683
Gross Moment of Inertia: I_y (in ⁴)	0.030
Gross Radius of Gyration: R_y (in)	0.453

EFFECTIVE SECTION PROPERTIES

Moment of Inertia-Deflection: I_x (in ⁴)	0.068
Section Modulus: S_x (in ³)	0.077

MOMENTS

Allowable Bending Moment: Ma (in-k)	1.530
Local Buckling Nominal Moment: Mnl (in-k)	2.550
Distortional Buckling Nominal Moment: Mnd (in-k)	2.710

LIMITING HEIGHTS - COMPOSITE (ft-in)

Spacing (in)	5 psf			7.5 psf			10 psf		
	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
12	14-11	11-10	10-4	13-0	10-4	8-10	11-10	9-4	-
16	13-6	10-9	9-4	11-10	9-4	-	10-9	8-4	-
24	11-10	9-4	-	10-4	-	-	9-4	-	-

1. Gypsum must be vertically oriented, applied full height to both sides, and fastened to each stud and track flange
2. Acceptable wallboards are 5/8" type X from: USG, National, GP, Pabco, American, Continental & CertainTeed.
3. No screws are required between stud and track, except as required by ASTM C754.
4. See CCRR-0154 for additional information. Review fire related assemblies for any additional requirements

CODES & STANDARDS



- Meets IBC 2015, 2018 & FBC 2020
- ASTM C 645, C 754, E 90, E 119, & AISI S220
- Steel sheet meets ASTM A 1003 or A 653
- Third Party Code Evaluation Report: CCRR-0154
- Multiple Fire Rated Assemblies

GREEN INFO

- LEED v4 credits available
- Contact Technical Services for more information.



09.22.16 Non-Structural Metal Stud

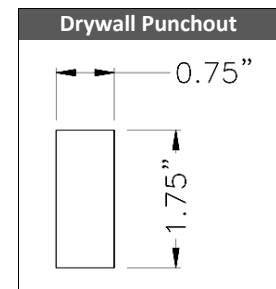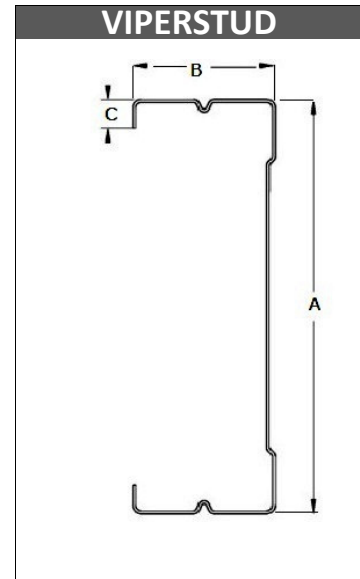

www.marinoware.com

For more information, please contact Marino\WARE Technical Services at 866-545-1545

This technical information reflects the most current information available and supersedes any and all publications, effective 4/2/22.

©Copyright 2022 by Ware Industries, Inc. All rights reserved