


# Roofing Underlayment Systems

- New Construction, Additions and Repairs
- Commercial, Residential or Institutional Applications
- Self-Adhering and Self-Sealing
- Overall Weather and Waterproofing
- Secondary Water Resistance
- Protection from Ice Dams and Wind-Driven Rain
- Full Roof Underlayment Protection
- Roof Valleys and Eaves
- Skylight, Chimney and Roof Vent Flashing
- Metal Roofing Systems
- Sealing Dormer Additions
- Versatile Product Line

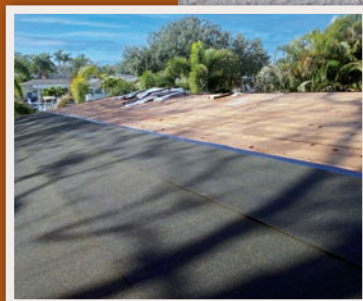

# MFM Family of Underlayments

The MFM line of underlayment products are self-adhering membranes that apply directly to the roof deck. The rubberized asphalt adhesive aggressively bonds to the substrate and self-seals around nails and other roofing fasteners.

- The minimum slope for installation is 2" per foot
- Protects from leaks caused by ice dams, melting snow and wind-driven rain
- May be applied over the entire roof deck, under roofing at edges, valleys, vents, skylights and chimneys
- Split release liner for ease of handling and installation



## **IB-3™ IceBuster**

An economical, 50 mil underlayment that protects from damage caused by ice dams, melting snow and wind-driven rain. It is rugged and time-tested in cold, rainy climates where ice dams quickly occur. May be left exposed for up to 30 days.

*Roll Sizes: IB-3™ IceBuster is available in roll sizes of 36" wide x 33' and 65' lengths.*



## **IB-3™ StormStopper**

This mineral surface, 50 mil underlayment comes with a non-removable selvedge edge to ensure a secure seal on overlaps creating a water-tight roof deck installation. Installs under roofing at the edges and valleys, and as a whole roof covering to protect from leaks caused by ice dams, melting snow and blowing rain. May be left exposed for up to 30 days.

*Roll Size: IB-3™ StormStopper is available in a roll size of 36" wide x 65' length.*



## **IB-4™ StormStopper**

A superior, 60 mil mineral surface underlayment that creates a secondary water barrier when installed across the entire roof deck while providing excellent ice dam and waterproofing protection. A removable selvedge edge allows for a secure seal on overlaps. May be left exposed for up to 365 days.

*Roll Size: IB-4™ StormStopper is available in a roll size of 36" wide x 67' length.*



## **StormStopper FSU™ (Film Surface Underlayment)**

This reinforced 45 mil underlayment is composed of an embedded traction surface polymer film laminated to a rubberized asphalt adhesive. Installs under roofing at edges, eaves, valleys, skylights and chimneys to protect the structure from water penetration. May be left exposed for 30 days after installation.

*Roll Size: StormStopper FSU™ is available in a roll size of 36" wide x 67' length.*

## Specialized Roofing Products

MFM has been an innovator in the roofing industry and these specialized roofing products are no exception. Suitable for new construction or re-roofing applications, these membranes self-seal around fasteners to form a complete waterproof barrier.

### ShingleStarter®

This innovative, 50 mil shingle starter course eliminates the need to cut shingle tabs along the roof edge saving valuable time and money. The membrane is waterproof and comes with a sealing strip to prevent wind uplift. ShingleStarter® rolls are individually wrapped.

*Roll Size: ShingleStarter® is available in a roll size of 7.2" wide x 33.5' length.*



## HIGH TEMPERATURE Underlayments



You'll never have to compromise cost or quality when it comes to MFM HIGH TEMPERATURE underlayments. Designed and tested for the most extreme environments, these rubberized asphalt adhesive products stand up to the heat and deliver unmatched performance.

- HIGH TEMPERATURE rated up to 250° F
- Aggressively adheres directly to the roof deck
- Self-seals around common roofing fasteners
- Engineered for use under most roofing materials
- Minimum slope for installation is 2" per foot
- Can be used as a whole roof covering to provide secondary water resistance
- Split release liner for ease of handling and installation

### MFM Wind & Water Seal™

This 40 mil underlayment is composed of a non-slip, cool white/gray polymer film that prevents damage from wind-driven rain. It also is ideal for secondary water resistance and prevents damage from ice dams. The non-slip surface includes overlap guide lines for easy installation. May be left exposed for up to 60 days.

*Roll Size: MFM Wind & Water Seal™ is available in a roll size of 36" wide x 67' length.*



### **IB-3 ShingleStarter™**

This 36" wide, self-adhering, 50 mil underlayment serves the dual purpose of replacing conventional starter strips while providing ice and water dam protection in cold climates. IB-3 ShingleStarter comes with two self-sealing tabs on each edge to bond to the shingles. Also comes with a split release liner for ease of installation and at valley applications.

*Roll Size: IB-3 ShingleStarter™ is available in a roll size of 36" wide x 65' length.*



### **MFM Roof Deck Tape®**

Composed of a non-slip film coated with an asphalt-based adhesive, this 40 mil waterproofing membrane is used to tape all joints and seams of a roof deck to prevent water penetration. It readily adheres to most roof deck substrates and self-seals around common fasteners.

*Roll Size: MFM Roof Deck Tape® is available in a roll size of 4" wide x 67' length.*



### **Ultra HT Wind & Water Seal®**

A 45 mil underlayment composed of a white, non-slip, cross-laminated polymer film. This premium product is engineered for use under shingles, metal roofing systems, and anywhere high temperatures are generated. Prevents damage from wind-driven rain and water penetration. May be left exposed for up to 90 days.

*Roll Size: Ultra HT Wind & Water Seal® is available in a roll size of 36" wide x 67' length.*




### **Premium HT Tile & Metal™**

This 60 mil underlayment is composed of a high-grade, reinforced polyester fabric top surface with a fiberglass-reinforced core for extreme durability.

It features a 3" selvage edge for a secure seal on overlaps. May be left exposed up to 180 days.

*Roll Size: Premium HT Tile & Metal™ is available in a roll size of 36" wide x 67' length.*

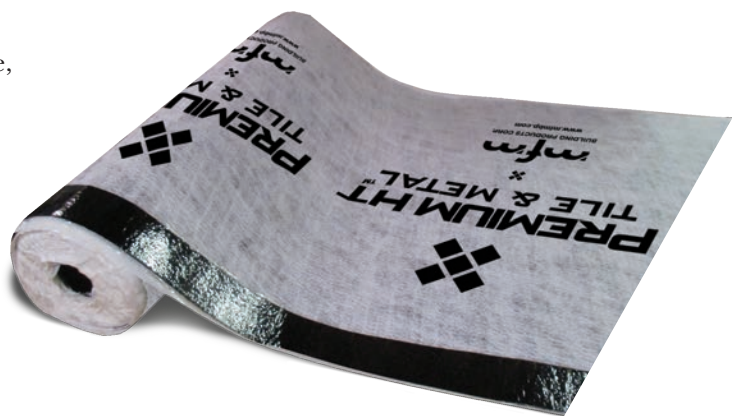

**Ask about MFM's unique Co-Branding Programs on MFM Wind & Water Seal™ and Ultra HT Wind & Water Seal® products. MFM will custom design a printing die with your logo for great exposure for your company on the job site.**

**Contact MFM for more details at 800-882-7663.**

## Versatile Self-Stick Underlayment Solutions

MFM Building Products offers the best in underlayment technology solutions. Our family of self-adhesive, self-sealing membranes offer unmatched selection and performance. Ideal for both commercial and residential structures, you can stand behind your project with confidence by installing one of our innovative underlayments.

### An Underlayment for Any Application

Whether your project is new construction, structure addition or roof repair, our family of underlayments can be matched to the performance and cost factors for your application. MFM underlayments can be used as a trusted line of defense against water damage across the whole roof deck, as a secondary water resistance barrier or as flashing material for skylights, roof vents and chimneys.

*Realize increased savings, ease of installation, and reduced costs with MFM Building Products – a pioneer in the construction industry since 1961!*



## MFM Building Products – The Right Choice

Founded in 1961, MFM backs all of our products with decades of research, experience and dedication to the building industry. By constantly evolving, MFM remains the recognized innovator and manufacturer of self-adhering waterproofing membrane technology. Count on MFM to provide the most value-based products on the market today.

### The Solutions Provider

MFM not only provides industry proven products, but also backs all of our products with outstanding customer service and technical support. Regardless of the application, MFM Building Products Corp. is the right solutions provider.

**Call one of our professionals today at 800-882-7663 to get your project on the right track.**



Product	Width	Length	Color	Thickness	°F Range	Warranty
<b>IB-3™ IceBuster</b>	36"	33' 65'	Black	50 mils nominal	>40°	5-Year
Self-adhering, 50 mil granule surface underlayment prevents damage from ice build-up and wind-driven rain. Split release liner for easy installation.						
<b>IB-3™ StormStopper</b>	36"	65'	Black	50 mils nominal	>40°	5-Year
A 50 mil granule surface underlayment with a non-removable selvedge edge for a secure seal on overlaps to prevent water penetration. Self-adhering with a split release liner for easy installation.						
<b>IB-4™ StormStopper</b>	36"	67'	Black	60 mils nominal	>40°	10-Year
A superior, self-adhering, 60 mil granule surface underlayment with a removable selvedge edge for a secure seal on overlaps to prevent damage from ice build-up and wind-driven rain. Split release liner for easy installation.						
<b>StormStopper FSU™</b>	36"	67'	Black	45 mils nominal	>40°	5-Year
A reinforced, 45 mil, polymer film surface underlayment for use primarily under shingle roofs. Applies at edges, valleys and whole roof applications to protect from water penetration. Self-adhering, self-sealing with split release liner for easy installation.						
<b>IB-3 ShingleStarter™</b>	36"	65'	Black	50 mils nominal	>40°	5-Year
Starter course, 50 mil granule surface underlayment, for asphalt shingle roofs. Also offers protection from ice dams, melting snow and wind-driven rain. Self-adhering, self-sealing with split release liner for easy installation.						
<b>ShingleStarter®</b>	7.2"	33.5'	Black	50 mils nominal	>40°	5-Year
Self-adhering, 50 mil granule surface starter course for asphalt shingle roofs. Adhesive strip bonds to shingles and prevents uplift at roof edge. Individually wrapped rolls. Release liner for easy installation.						
<b>MFM Wind &amp; Water Seal™</b>	36"	67'	White/Gray	40 mils nominal	>50° <250°	10-Year
<b>HIGH TEMPERATURE Rated.</b> A 40 mil underlayment for use under metal, shingles or tile. Polymer surface with cool white/gray texture prevents damage from wind-driven rain. Self-adhering with split release liner for easy installation.						
<b>Ultra HT Wind &amp; Water Seal®</b>	36"	67'	White	45 mils nominal	>50° <250°	10-Year
<b>HIGH TEMPERATURE Rated.</b> A 45 mil cross-laminated underlayment for use under all roofing materials. Cool white, non-slip polymer film surface comes with split release liner for easy installation. Prevents damage from wind-driven rain and water penetration.						
<b>Premium HT Tile &amp; Metal™</b>	36"	67'	White/Gray	60 mils nominal	>50° <250°	10-Year
<b>HIGH TEMPERATURE Rated.</b> A 60 mil reinforced polyester fabric top surface and fiberglass-reinforced core. Features a 3" selvedge edge for a monolithic seal. Self-adhering with a split release liner for easy installation.						
<b>MFM Roof Deck Tape®</b>	4"	67'	White/Gray	40 mils nominal	>40°	10-Year
A 40 mil self-adhering tape with a non-slip surface for sealing joints between roof panels and general waterproofing. Self-seals around fasteners to prevent water infiltration.						

For more detailed information on MFM Underlayments; including technical data sheets, installation instructions, product approvals and warranties, please visit our website at [www.mfmbp.com](http://www.mfmbp.com).