

# NUDO<sup>®</sup>

A VERZATEC COMPANY



## LAMINATED PANELS WITH A PURPOSE

---

Durability · Versatility · Cleanability · Simplicity

# Allure™

## Decorative • Durable • Easy Maintenance

Allure is a decorative wall and ceiling system with limitless finishes. It combines high pressure laminate or prefinished veneer with a recycled core. These panels are easy to install, have a slim profile and are green friendly.

### Laminate Finish Options



NUDO CeramicSteel



High Pressure Laminate



Metal Veneer



Prefinished Wood Veneer




Custom Graphics

### Features & Benefits

- Limitless laminate possibilities
- 4' x 8', 4' x 10', 2' x 2', 2' x 4', 4' x 4'
- .150", 3mm thickness
- Fire-rated, Class A, B & C
- Complimentary trim systems available
- Green friendly

### Typical Applications

- Patient Rooms
- Operating Rooms
- Treatment Rooms
- Laboratories
- Restrooms
- Locker Rooms
- Gymnasiums
- Cafeterias
- Educational Facilities
- Corridors
- Hospitality

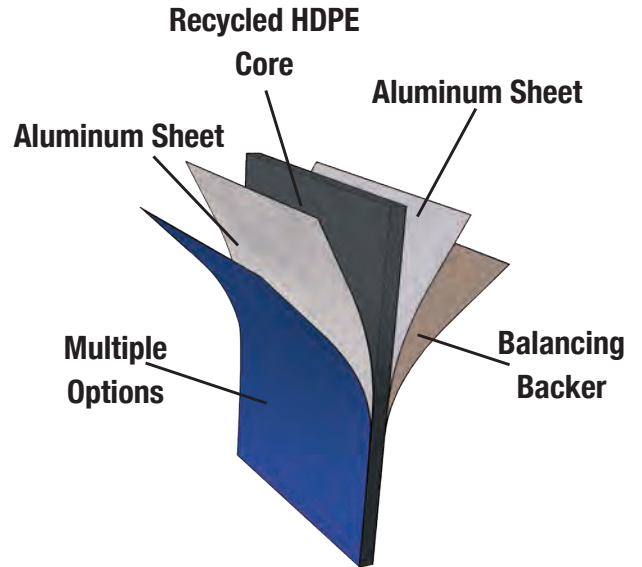



# NUDO CeramicSteel

## Perfection • No Exception

NUDO CeramicSteel was designed tough to meet the needs of demanding spaces. Our multipurpose panels utilize a magnetic surface made of precisely balanced color porcelain enamel that is furnace-fused at approximately 1450°F to 28 gauge steel. NUDO laminates the porcelain steel using a special waterproof resin glue that bonds the porcelain to a moisture resistant core of your choice and .010" aluminum backer. This results in a laminated panel designed to meet your purpose.



| Panel Substrate | Aluminum Composite (ACM)  |                    |
|-----------------|---------------------------|--------------------|
| Nominal Size    | 4'x8'                     | 4'x10'             |
| Actual Size     | 47 3/4" x 95 3/4"         | 47 3/4" x 119 3/4" |
| Thickness       | 1/4"                      |                    |
| Nominal Width   | 48"                       |                    |
| Weight          | 2.5 lbs                   |                    |
| Fire Rating     | Class A                   |                    |
| Product Code    | PS28-PM240-[8,10]-[Color] |                    |
| Image           |                           |                    |

## BioProtect

### For Cleanrooms

Cleanrooms are essential within a wide variety of industries and NUDO's BioProtect wall & ceiling panels, along with coordinating kerb and joint sealant, delivers the ultimate solution. Offering durability, moisture resistance and cleanability, these panels are the perfect fit for any cleanroom application.

CLEANROOM



| Panel Substrate | Aluminum Composite (ACM)  |                    |
|-----------------|---------------------------|--------------------|
| Nominal Sizes   | 4'x8'                     | 4'x10'             |
| Actual Sizes    | 47 3/4" x 95 3/4"         | 47 3/4" x 119 3/4" |
| Thickness       | 1/4"                      |                    |
| Nominal Width   | 48"                       |                    |
| Weight psf      | 2.3 psf                   |                    |
| Fire Rating     | Class A                   |                    |
| Product Code    | SF9FRPM240-[8,10]-[COLOR] |                    |
| Image           |                           |                    |

### Near Seamless Appearance

The interlocking nature of NUDO's BioProtect wall and ceiling panels offers a near seamless appearance!

### Features

- Seamless FRP wall system
- Meets USDA Requirements for Walls and Ceilings
- Meets FDA Requirements for Walls and Ceilings
- Superior hygiene
- Moisture intrusion prevention
- Durable finish
- Withstands aggressive wash-down
- Virtually maintenance free

### Typical Applications

- Airports
- Stadiums
- Theaters
- Hospitals
- Schools
- Cleanrooms
- Skybridges
- Subways

### Finishes

NUDO offers 3 standard colors in a matte or high gloss finish. Custom colors and surface imaging are also available.

### Resistances



Chemical Resistant



Scratch Resistant



Bacteria Resistant



Fire Resistant




Graffiti Resistant




Stain Resistant


## Embossed




Beige (293)\*\* Silver (260)




White (151) Black (806)




Pineapple (322) Medium Gray (1207)




Dark Gray (720) Khaki (203)




Brown (940) Blue (525)



Pearl (750) Almond (675)



Ivory (611) Red (132)



Bordeaux (139)

## Smooth



Pearl (750) Almond (675)



White (151) Black (806)

\*\* Not available in 9' length.

# FiberLite® FRP

Strength • Durability • Sanitation • Easy Maintenance

FiberLite FRP are fiberglass reinforced plastic panels that are ideal for new or retrofit construction. They install directly to solid wall surfaces or can be used for drop-in ceilings. FiberLite FRP panels are specially engineered to provide durability, easy maintenance and sanitation with exceptional physical and mechanical properties.

FiberLite liner panels provide all you expect from a "Fiberglass Reinforced Panel". These panels are made for interior, moisture resistant environments. They are adhered directly to gypsum or plywood walls with a variety of different trowel-on adhesives. FiberLite is typically purchased in a .090" thickness. A wide selection of sizes, colors, textures and fire-ratings are readily available. Competitive pricing and no minimums make FiberLite the choice of distributors from coast to coast. FM Approved Available.

PATIENT ROOM



## Features & Benefits

- Durable, shatter resistant surface that resists scratches
- 100% moisture resistant
- Meets USDA, FDA & LA County Requirements
- Thermal shock and chemical resistant
- Cleans easily with steam, high pressure sprayers or soap/water
- Extensive color options on textured or smooth surface improves design flexibility
- Class A or Class C fire-rating available
- Color-matched moldings and fasteners available for easy installation
- High impact strength
- Low maintenance

## Typical Applications

- Kitchens and Food Preparation Areas
- Bathrooms and Hallways
- Food Processing Plants
- Water and Wastewater Treatment Plants



Compliant with California Dept. of Public Health Standard Method v1.2 for classroom and private office.

| Product Number    | Thickness & Description     | Sizes*                |
|-------------------|-----------------------------|-----------------------|
| LP-S9             | .090" Smooth                | 4' x 8', 10'          |
| LP-F9             | .090" Textured              | 4' x 8', 9', 10', 12' |
| LP-F9-R           | .090" Textured-Roll         | 4' x 50', 250', 500'  |
| LP-F9-WR          | .090" Textured-Wide Roll    | 8' x 50', 250'        |
| LP-S9-FR          | .090" Smooth Fire-Rated     | 4' x 8', 10'          |
| LPXSG9-R          | .090" High-Gloss Smooth     | 4' x 50', 500'        |
| LP-F5             | .050" Textured              | 4' x 8', 10'***       |
| LP-F100-CT        | .100" Textured-Ceiling Tile | 2' x 2', 4'           |
| LP-F120           | .120" Textured              | 4' x 8', 10'***       |
| LP-F120-CT        | .120" Textured-Ceiling Tile | 2' x 2', 4'           |
| LP-F9-FR-[4,8]-FM | .090" Textured FM Approved  | 4' x 8', 10'          |
| LP-S9-FR-[4,8]-FM | .090" Smooth FM Approved    | 4' x 8', 10'          |

\*Not all colors available in all sizes.

\*\*4'x10' is a custom order with longer lead times. Minimums may apply.

Strength • Durability • Sanitation • Easy Maintenance

The NuFiber panel is a durable, fiberglass sheet factory-laminated to waferboard, gypsum or plywood combining the many advantages of wood and fiberglass (FRP). NuFiber is ideal for new construction of walls, ceilings or partitions. They easily install directly to studs, ceiling joists, furring strips or solid surfaces, and some can even be utilized as a drop-in ceiling tile.

## Features & Benefits

- Meets USDA, FDA & LA County Requirements
- Wood substrate for structural strength rigidity
- Resists moisture, stains, odors, chemicals, impact and scratches
- Cleans easily with steam, high pressure sprayers or soap/water
- Class A or Class C fire-rating available

## Typical Applications

- Barns and Animal Confinement Buildings
- Modular Buildings
- Metal and Rural Buildings

HOG CONFINEMENT



| Product Number          | Thickness & Description                  | Sizes*            |
|-------------------------|--|-------------------|
| F3P235                  | 5.2mm Fir Exterior Plywood               | 4' x 8', 10'      |
| F3P375                  | 3/8" Fir Exterior Plywood                | 4' x 8', 10', 12' |
| F3W375                  | 3/8" Waferboard - OSB                    | 4' x 8', 10'      |
| F3PB625-FR-MR           | 5/8" Fire-Rated Gypsum                   | 4' x 8', 10', 12' |
| F3P500                  | 1/2" Fir Exterior Plywood                | 4' x 8', 10', 12' |
| F3PB500-FR-MR           | .030" Text. FRP-1 Side on 1/2" Gypsum    | 4' x 8', 10'      |
| F3PB500-FR-MR-F200-X-CT | 1/2" Gypsum, 2" Extruded Foam            | 2' x 2', 4'       |
| F3W420-8-WHITE-GS       | .030 FRP One Side 7/16" Waferboard - OSB | 4' x 8', 10'      |

Not all FRP colors available in all sizes

# FiberCorr™

Lightweight • Moisture Resistant • Durable • Scratch Resistant

FiberCorr panels consist of a Fiberglass Reinforced Plastic (FRP) overlay that is factory laminated to a corrugated plastic core. This quality construction provides you with a lightweight panel that doesn't compromise durability.


## Features & Benefits

- Textured or smooth panel surface
- Resists moisture, stains, odors and chemicals
- Meets USDA, FDA & LA County Requirements
- Cleans easily
- Class A or C fire-rated surfaces available

## Typical Applications

- Water and Waste-Water Treatment Plants
- Marine Facilities
- Food Processing Plants
- Car Washes

COMMERCIAL KITCHEN

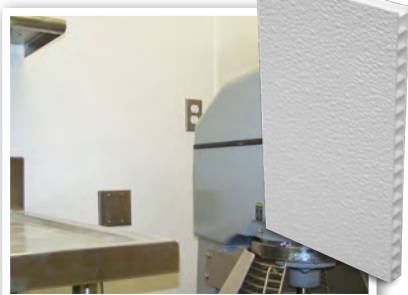


| Product Number | Thickness & Description               | Sizes        | Wt.    |
|----------------|---------------------------------------|--------------|--------|
| F3C200         | .030" FRP One Side .200" Corr./Fluted | 4' x 8', 10' | 20 lb. |
| F3C320         | .030" FRP One Side .320" Corr./Fluted | 4' x 8', 10' | 18 lb. |
| F3C400         | .030" FRP One Side .400" Corr./Fluted | 4' x 8', 10' | 20 lb. |
| F3C400-D-CT    | .030" FRP Two Side .400" Corr./Fluted | 2' x 2', 4'  | 7 lb.  |
| SSW            | Super Silicone White                  |              | 10 oz. |

## FRP Finishes



Black (806) Pebbled



Brown (772) Pebbled




Sherwood Green (233) Pebbled



Light Green (467)\* Pebbled



Yellow (334) Pebbled



Charcoal (710) Pebbled




Pearl Gray (750) Pebbled



White (151) Smooth & Pebbled



Blue (525) Pebbled



Bordeaux (139) Pebbled



Red (132) Pebbled



Orange (131) Pebbled




Beige (293) Pebbled\*\*



Khaki (203) Pebbled




Almond (675) Pebbled



Bronze (298)\* Pebbled

## Textures



Smooth



Pebbled

\* Available for special order only with 5,000 sq/ft minimum.

\*\* Not available in 9' length.





## Durability • Sanitation • Seamless • Easy Installation

The need for a clean environment is met with UtiLite easy-to-maintain interlocking wall and ceiling panels. The interlocking nature of the panels offers a near seamless appearance. These versatile panels can be installed quickly, both vertically or horizontally, directly to studs or substrate. UtiLite's attractive price point and ease of installation provides cost effective solutions for contractors and installers.

### Features & Benefits

- Clean, smooth white surface
- Innovative, corrugated plastic core provides a lightweight, durable panel
- 100% moisture resistant
- Interlocking edge provides a near seamless appearance, while reducing installation time
- Class A fire-rating
- Meets USDA, FDA and LA County requirements for walls and ceilings
- CIF-ULCS 102.2 – Class A

CAR WASH



### Typical Applications

- Food Processing Plants
- Automatic Car Washes
- Grow Facilities
- Healthcare Facilities

### Standard Sizes

|           |           |
|-----------|-----------|
| 16" x 8'  | 24" x 8'  |
| 16" x 10' | 24" x 10' |
| 16" x 12' | 24" x 12' |
| 16" x 16' | 24" x 16' |
| 16" x 20' | 24" x 20' |

### Drop-In Ceiling Tiles

2' x 2'      2' x 4'



# SecureShield™

## Impact Resistant • Easy Installation • Security at the Core of Design

SecureShield is a composite panel that provides minimum to medium levels of wall security, without disrupting the design criteria necessary for your building. It provides superior resistance to penetration from either blunt force or sharp instruments. It installs directly to the structural framing like any standard gypsum panel – no additional products or labor required.

### Features & Benefits

- Polycarbonate panel backer provides impact resistance up to 3200 ft. pounds of energy
- Can be customized to meet medium and high security requirements without sacrificing design
- Installs in a fraction of the time required for two-step steel mesh products
- Surface finishes and protection can include a full range of patterns and colors
- Fiberglass reinforced plastic facing is available
- Class A fire-rating

SECURE ROOM




### Typical Applications

- Correctional Facilities
- Interrogation Rooms
- Data Storage Rooms
- Pharmacies and Laboratories

### Standard Sizes

4' x 8', 4' x 10', 4' x 12'  
Minimums May Apply

SecureShield  
FRP (optional)  
Fiberglass  
Reinforced  
Plastic - Facing

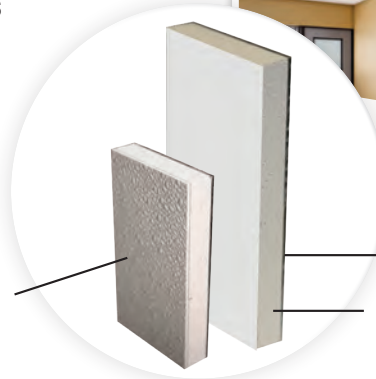

Polycarbonate Backer

Fire-Rated Drywall

# NuPoly®

**Durability • Sanitation • Easy Installation**

NuPoly panels are a high density polyethylene (HDPE) overlay, factory laminated to various substrates on one or both sides. They install directly to studs, ceilings or floor joists, furring strips or solid walls/floors. NuPoly panels are an economical solution for areas requiring scratch and moisture resistance. Available in a variety of colors, textures and sizes.

## Features & Benefits

- Scratch and impact resistant
- Chemical, moisture and fungus resistant
- Cleans easily with steam, high pressure sprayers or soap/water
- Available in smooth or textured and in various thicknesses and colors
- Excellent wearing capabilities for floors or decking in interior environments
- Class C fire-rating available
- Wide variety of substrates available
- Meets USDA, FDA & LA County Requirements

COMMERCIAL KITCHEN



| Product Number | Thickness & Description   | Sizes             |
|----------------|---------------------------|-------------------|
| E3P375         | 3/8" Fir Exterior Plywood | 4' x 8', 10', 12' |
| E3W375         | 3/8" Waferboard - OSB     | 4' x 8', 10', 12' |
| E3P500         | 1/2" Fir Exterior Plywood | 4' x 8', 10', 12' |

## Typical Applications

- Barns and Animal Confinement Buildings
- Modular Buildings
- Metal and Rural Buildings


# Elements™

**Moisture Resistant • Enhanced Durability • Quality Controlled Extrusions**

Elements integrates the latest trends in interior design and ensures a desirable finish when applied in ceilings and on walls. These green friendly panels are functional and provide creative options for any space.

## Features & Benefits

- Painted, brushed or mirrored polished aluminum finish
- Recycled composite core
- Easy to install and clean
- Available in smooth or textured finish
- 4' x 8', 4' x 10', 2' x 2', 2' x 4', 4' x 4'
- 3mm (6mm available in select colors only)
- Class A fire-rating available

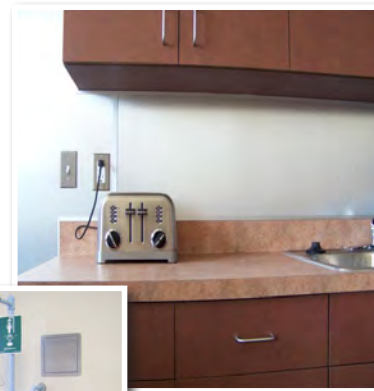

### NuPoly® Colors



Black



Gray



Beige



White

### NuPoly® Finishes



Smooth



Cracked Ice



Moroccan



Haircell

### Elements™ Colors



Black



Green



Blue



Red



Yellow



Almond



White



Brushed Copper



Brushed Gold



Brushed Bronze



Brushed Silver



Copper




Mirror

# Accessories

Nudo provides the accessory items needed to simplify the installation for any of our panel systems. All moldings are custom extruded to specifically match the panel being used.

- Vinyl and aluminum moldings offered in a variety of profiles
- Adhesives, sealants, rivets, screws and nails
- Mechanical fasteners
- Matching FRP colors, moldings and rivets

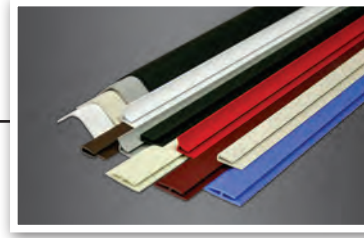

# Product Quick Reference Chart

|                              | Allure   | Ceramic Steel   | Elements  | FiberCorr  | FiberLite*                                 | NuFiber  | NuPoly  | Secure Shield   | UtiLite   |
|------------------------------|--|---|---|--|--|--|---|---|---|
| <b>Description</b>           | Recycled composite core sandwiched between aluminum and a layer of high pressure laminate(HPL) | Water-resistant core with porcelain steel finish              | Recycled composite core sandwiched between two sheets of aluminum | Corrugated/fluted polypropylene core with a FRP face | Fiberglass reinforced plastic (FRP) panels | Fiberglass reinforced plastic (FRP) panels laminated to plywood, gypsum or OSB | High-density polyethylene laminated to plywood and OSB substrates | Security wall panel combining gypsum, polycarbonate and FRP | Corrugated/fluted PVC substrate with a smooth finish and seamless interlocking edge connections |
| <b>Use</b>                   | Wall and ceiling panel   | Impact, scratch, and graffiti resistant wall & ceiling panels | Wall and ceiling panel  | Designed performance walls, drop-in ceilings         | Functional wall covering, drop-in ceiling  | Designed performance wall panels   | Designed performance wall panels                                  | Secure designed performance walls or ceilings               | Easily cleaned, water resistant functional wall panels  |
| <b>Substrate</b>             | Recycled thermoplastic core  | ACM, HDPE or Cement Board                                     | Recycled thermoplastic core                                       | Corrugated plastic core                              | None                                       | Plywood, gypsum, OSB   | Plywood & OSB   | Gypsum & polycarbonate                                      | Corrugated plastic core   |
| <b>Available Fire-Rating</b> | Class A, B & C   | Class A   | Class A   | Class A & C  | Class A & C                                | Class A & C  | Class C   | Class A   | Class A   |
| <b>Certifications</b>        |  | USDA, FDA   |   | USDA, FDA & LA County                                | USDA, FDA & LA County                      | USDA, FDA & LA County  | USDA, FDA & LA County   |   | USDA, FDA & LA County   |
| <b>Maintenance</b>           | Spray clean, mild solvents   | Spray clean, mild solvents                                    | Spray clean, mild solvents  | Spray clean, mild solvents                           | Spray clean, mild solvents                 | Spray clean, mild solvents   | Spray clean, mild solvents  | Not Applicable  | Spray clean, mild solvents  |

\* Compliant with California Dept. of Public Health Standard Method v1.2 for classroom and private office.

We are happy to assist with any questions you may have. There's no project too big or small and no challenge we aren't up for providing a solution for.

# NUDO®

1500 Taylor Avenue  
Springfield, IL 62703  
www.Nudo.com

Ph: 800.826.4132  
Fax: 217.528.8722

Form 1001.L.REV.6/24

Visit [www.Nudo.com](http://www.Nudo.com) or  
contact our local dealer for details.