




EASY TO USE Acoustical Putty

QuietPutty® is a moldable putty designed to maintain the performance of acoustically rated walls with penetrations such as electrical outlets, HVAC ducts, water hookups and cables.* QuietPutty® is clean, easy to use and requires no tools. Use as part of the Quiet® Sound Damping System for reliable, low cost results.

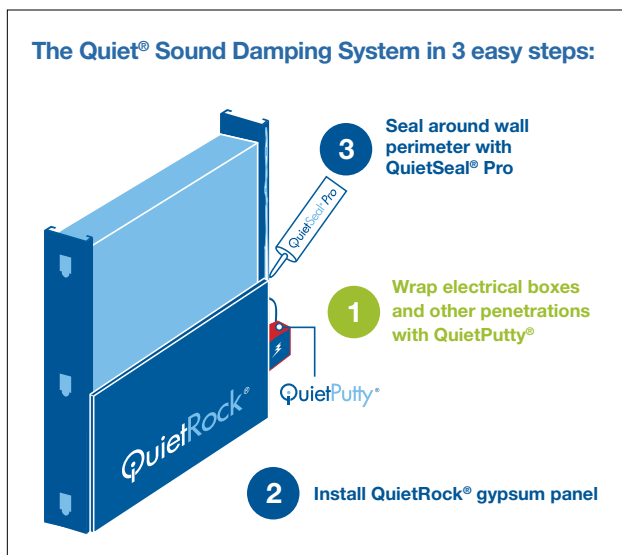

QuietPutty Benefits

- Adheres to most construction materials for a high quality seal
- Asbestos free
- Provides a draft and cold smoke seal
- Minimal shrinkage and will not dry out
- Noncorrosive to metal and plastics

Product Specifications:

Thickness:	0.1875" (4.76 mm)
Width:	7.25" (184mm)
Length:	7.25" (184mm)
Weight:	7oz (198g) /pad
Color:	Red
Unit Size:	20 pads/box
Surface Burn:	(ASTM E84) Flame Spread 15, Smoke developed: 250, Classification: A

Visit www.QuietRock.com for installation instructions and complete architectural documentation

* Not recommended for use on penetrations with high temperature equipment or canned light canisters.

The information contained in this document is for general purposes only. Construction practices have an influence on final STC ratings. PABCO® Gypsum cannot guarantee actual STC ratings. Flanking sound patterns, the integrity of the wall, and construction methods factor in effective sound control. QuietPutty® should be stored flat in a dry area to prevent damage to product.