



CONCRETE

Sika[®] ViscoFlow[®]-2020 WORKABILITY RETAINING ADMIXTURE

- Improved Slump Retention
- Utilizes the Latest Polycarboxylate Polymer Technology
- Improved Quality Control, Less Rejects
- Improved Concrete Finishability
- Improved Profitability

BUILDING TRUST



Sika[®] ViscoFlow[®]-2020

WORKABILITY RETAINING ADMIXTURE

TYPICAL APPLICATIONS:



- Ready-mix concrete, precast concrete and on-site concrete plant
- Whenever improved control over workability retention is needed
- High early and later age strength are needed
- Improved finishability is needed

PRODUCT HIGHLIGHTS:

- Improves slump retention without excessive retardation
- Enables high early and later age strengths
- Reduces or eliminates the need to re-temper concrete at site
- Improves consistency of concrete
- Reduces mix cost by allowing cement/SCM optimization
- Reduces stickiness and improves concrete finishability
- Improves overall durability of concrete



TESTING DATA:

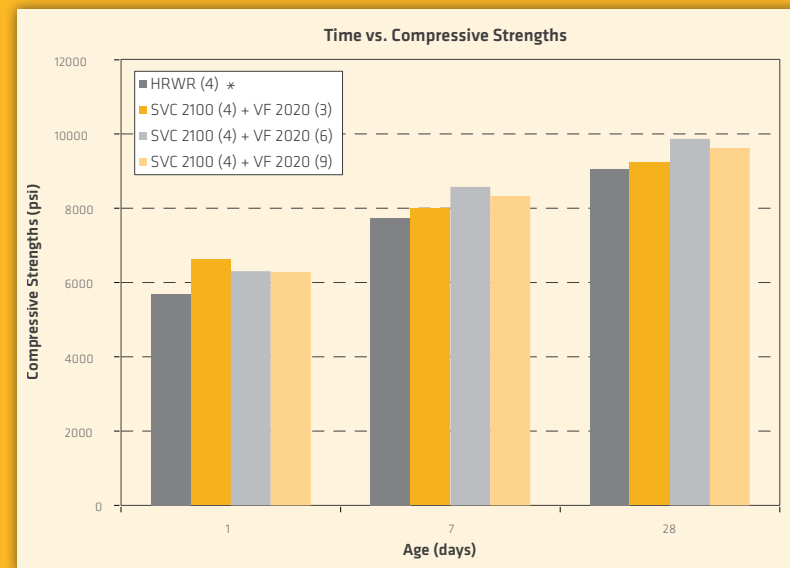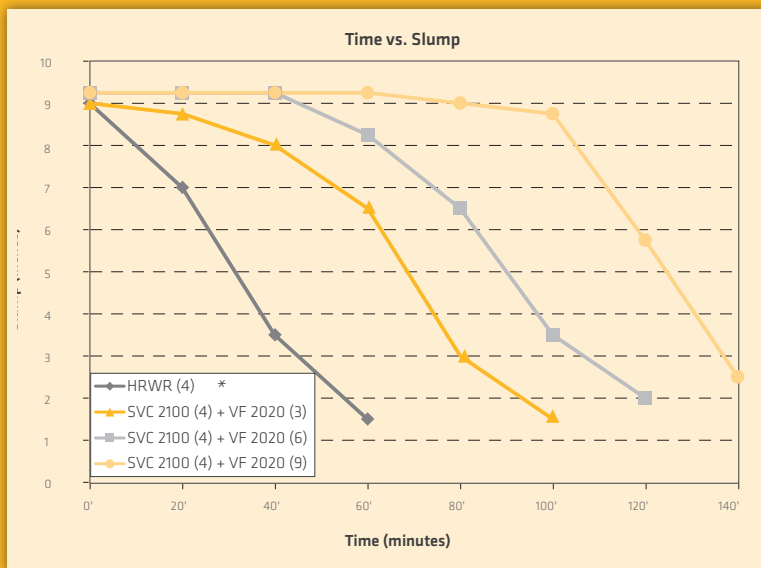

*SVC 2100 - High range water reducing admixture • VF 2020 - Workability Retaining admixture • Dosage mentioned in bracket () is fl. oz / 100 lbs. of Cm

FOR MORE Sika[®] ViscoFlow[®] INFORMATION:

Contact Sika Team 800 933 7452 ■ Website usa.sika.com

For up to date and accurate information please consult the current Product Data Sheet at usa.sika.com

SIKA CORPORATION
201 Polito Avenue
Lyndhurst, NJ 07071
USA

Contact
Phone: 800.933.7452
Fax: 201.933.6225
usa.sika.com

BUILDING TRUST

