

# SECUROCK® EXOAIR® 430

Industry Sell Sheet

## Product Overview

Introducing the Securock® ExoAir® 430 System—the first integrated gypsum sheathing panel with a factory-applied fluid air barrier membrane. The panel brings two proven technologies together—USG Securock® Brand Glass-Mat Sheathing and Tremco’s fluid-applied air/water barrier membrane into one panel—that gives you an efficient delivery of the air barrier solution to your job site.

The controlled factory application of the membrane to the face of the panel provides the assurance that only a traditional thick-film membrane can. The system provides the continuity with a direct connection of the sealant to the membrane, giving you the visual verification to install with confidence.

When installed with the approved detailing accessories, the system reduces job-site challenges, simplifies installation and results in superior control of air, water and vapor.

- Continuity with a direct connection of sealant to the membrane
- Factory application = consistent mil thickness and adhesion to base panel
- UL classified as to fire resistance
- Listed with PEI
- ABAA approved
- Preconstruction and on-site technical support
- Trained/approved installers
- 5-year panel warranty



## Performance Built In Fully Tested System

AATCC 127-08	ASTM E84
ASTM C297	ASTM E96
ASTM C473	ASTM E119
ASTM C1177	ASTM E136
ASTM C518	ASTM E2273
ASTM C719	ASTM E283
ASTM C1305	ASTM E331
ASTM D412	ASTM E831
ASTM D1970	ASTM E2178
ASTM D3273	ASTM E2357
ASTM D3330	ASTM E2485
ASTM D4541	NFPA 285

**USG** | **TREMCO**  
SECUROCK® EXOAIR® 430

## Benefits


- Premanufactured air barrier system minimizes field-applied challenges and makes installation more efficient
- Minimization of weather impact—no membrane cure time or washout—keeps the job moving
- Install sheathing and air barrier membrane at the same time
- Improved job-site scheduling and management— Mason and Glazier start earlier
- Factory application means precise thickness and consistency
- No surprise costs due to scheduling delays
- Less equipment on-site
- Building dried in earlier
- Control the unpredictable—time and materials



## System Features

- Fluid-to-fluid system
- Suitable substrate for a variety of facades including adhesively applied EIFS
- Fully tested for compatibility with all system components
- Less product/waste on-site
- Simplified installation—hang + detail with one product
- Minimizes substrate prep

### In Plane Board Joints

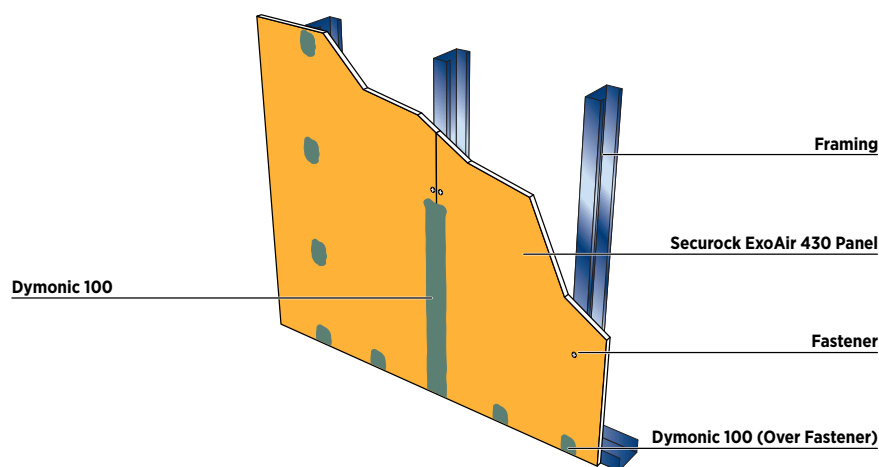

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Manufactured by  
United States Gypsum Company  
550 West Adams Street  
Chicago, IL 60661

For Tremco Technical Support  
866-209-2402  
216-292-5181  
tremcosealants.com



**SECUROCK® EXOAIR®**

Tremco® and ExoAir® are registered trademarks of Tremco Incorporated.  
The trademarks USG®, SECUROCK®, the USG logo, and related marks are trademarks of USG Corporation or its affiliates.  
Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.