

# USG COMPÄSSO™ ELITE FOR USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING SYSTEM

EXTRUDED PERIMETER TRIMS - STRAIGHT



McDonald's Headquarters  
Architect: IA Interior Architects  
Photo: ©Garrett Rowland

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

USG COMPÄSSO™ ELITE FOR DRYWALL COLORS



Primer White


## FEATURES AND BENEFITS

- USG Compässon™ Elite for Drywall is an extruded aluminum trim for creating drywall ceiling fascias on USG Ensemble® Ceiling Systems.
- Easier to install than conventional drywall fascias.
- Available in 2-1/2", 4", 6" and 8" trim heights.
- Can be ordered in standard 10' lengths or custom engineered curves.
- Integrated taping flange for a clean, finished edge.
- Designed to integrate with 5/8" USG Sheetrock® Brand Ensemble® Four-Sided Taper™ Panels.
- Works with USG Compässon™ Elite splice plates.
- Primer White must be field painted or sprayed with the USG Ensemble™ Spray Applied Finish to achieve desired look.

## APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Sloped Ceilings
- Custom Curved Radius and Length
- Quick Ship Straights
- New Construction

Perspective

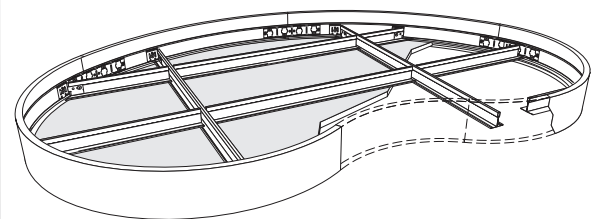

# USG COMPASSO™ ELITE FOR USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING SYSTEM

EXTRUDED PERIMETER TRIMS - STRAIGHT

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com


## COMPONENTS

Trim Profiles

Item #

		Materials		Length	Finish
		Extruded aluminum alloy		10'	Factory-applied, baked-on polyester conversion coat
2-1/2"	4"	6"	8"	Factory-Welded Corners	
CPALDWJT2510	CPALDWJT410	CPALDWJT610	CPALDWJT810		

## USG COMPASSO™ ELITE DRYWALL TRIM INSTALLATION FOR USG ENSEMBLE® CEILING SYSTEM

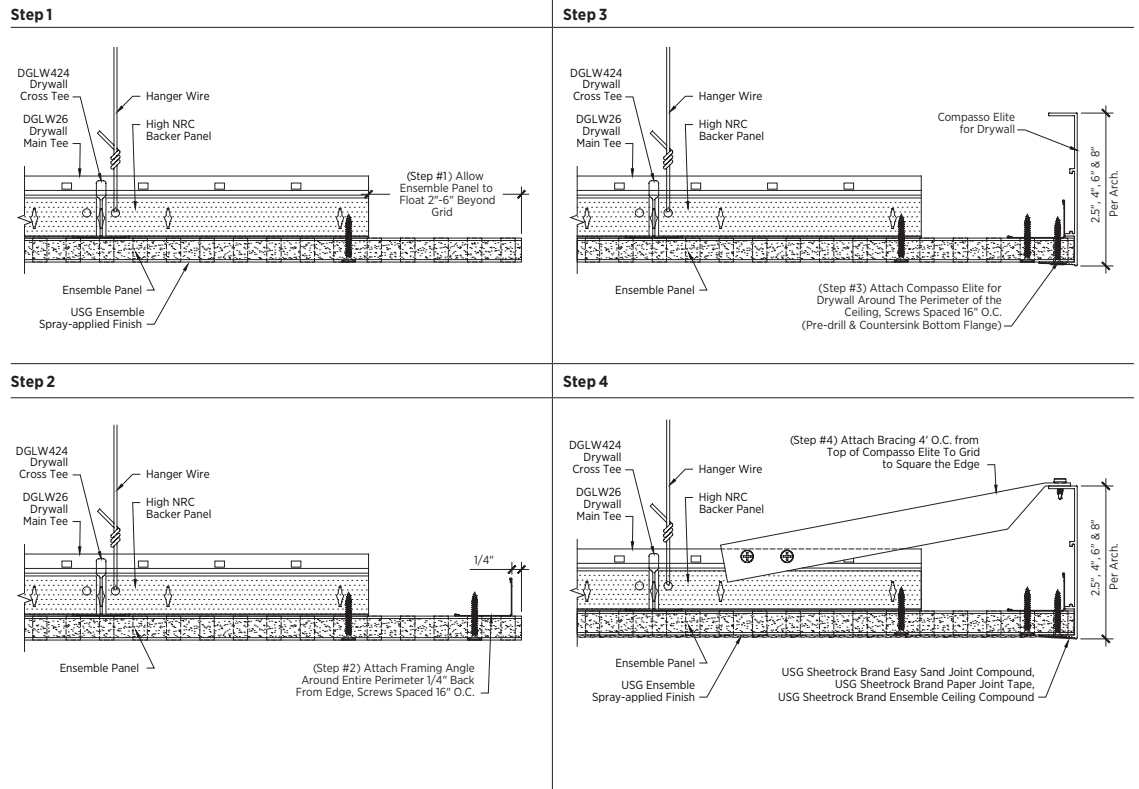

## FINISHING RECOMMENDATIONS

1. Apply the bed and tape coat using USG Sheetrock Brand Easy Sand Joint Compound and USG Sheetrock Brand Paper Joint Tape.
2. Apply the fill coat using USG Sheetrock® Brand Easy Sand™ Joint Compound or USG Sheetrock® Brand Ensemble™ Ceiling Compound.
3. Apply the finish coat using USG Sheetrock® Brand Ensemble™ Ceiling Compound.

### Note

Use USG Compasso™ Elite splice plates for joining pieces together.

### Product literature

Data sheet: AC290391 and AC3317  
Installation guide: IC624  
Warranty: SC2102  
Care and Maintenance Instructions: IC518  
Trim Systems Design Guide

### Online tools

usgdesignstudio.com or cgcdesignstudio.com

### Recycled content

For details, see the LEED report tool at usgdesignstudio.com or cgcdesignstudio.com

### Material

Extruded aluminum alloy

### Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

- Minimum radius is 18".

## PHYSICAL DATA

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

### AC290391/rev. 10-23

© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, ENSEMBLE, EASY SAND, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

