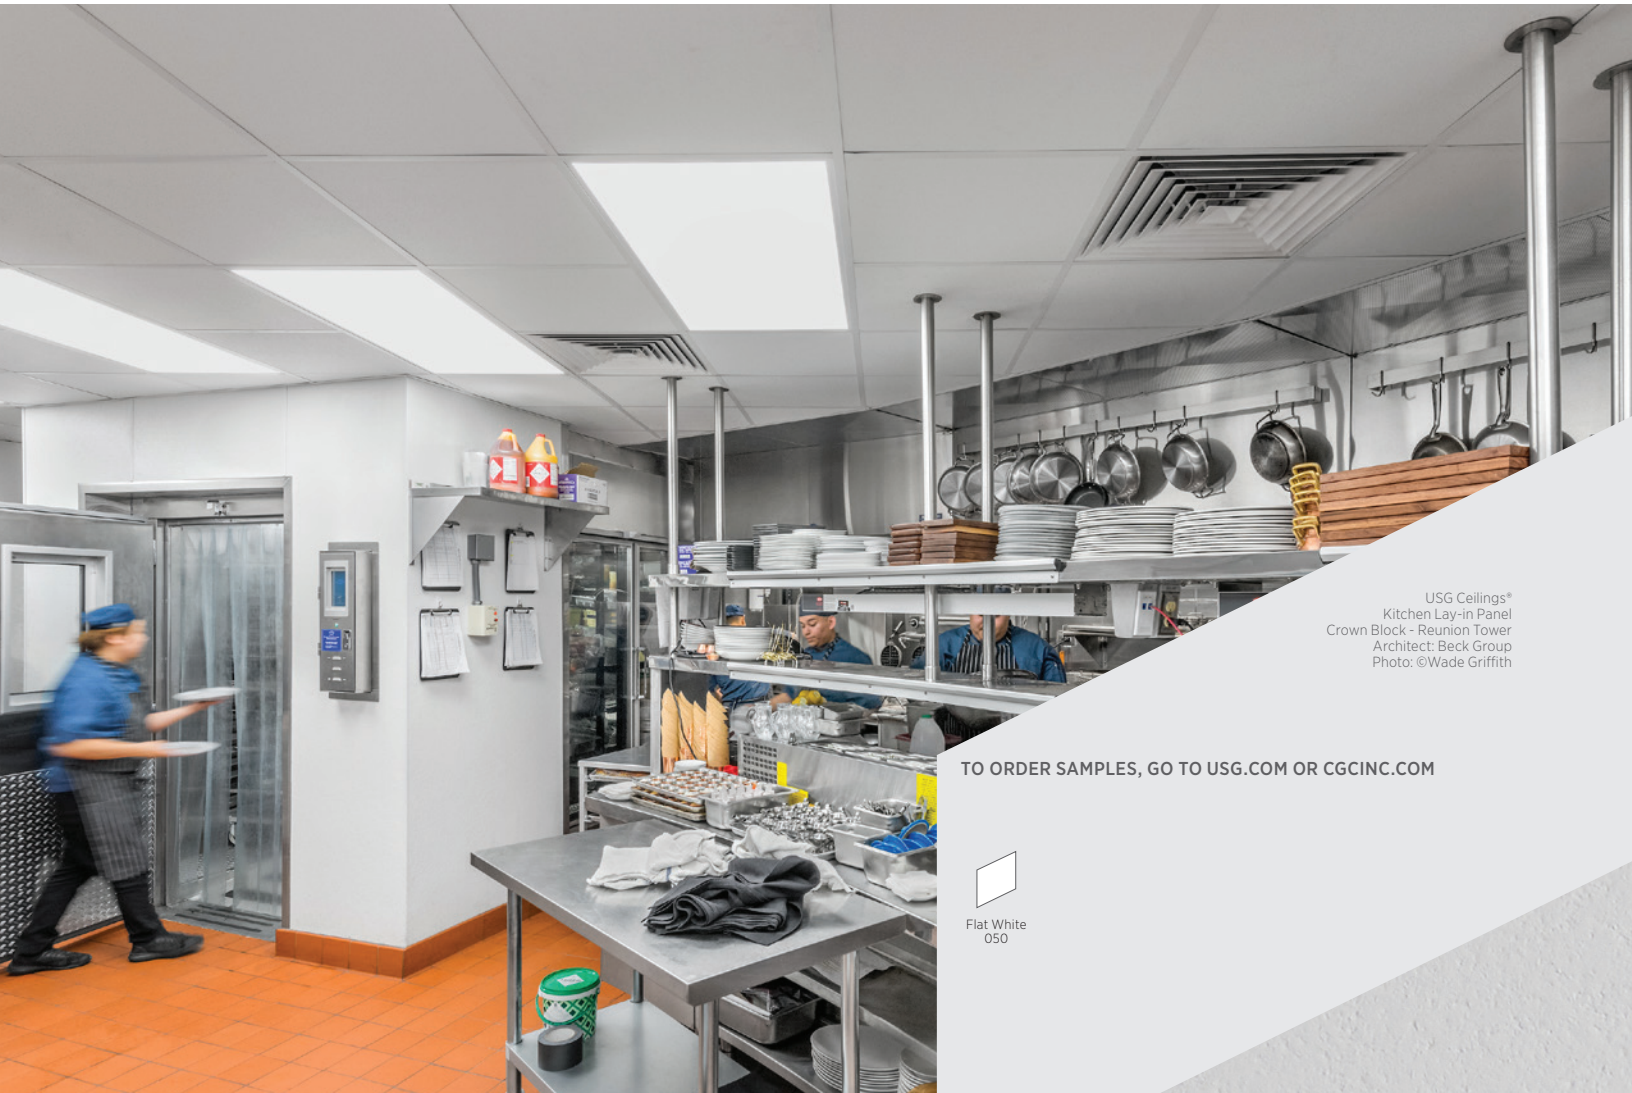


# USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE



USG Ceilings®  
Kitchen Lay-In Panel  
Crown Block - Reunion Tower  
Architect: Beck Group  
Photo: ©Wade Griffith

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)



Flat White  
050

## FEATURES AND BENEFITS

- Lightweight alternative to vinyl-covered gypsum.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- High light reflectance.
- Washable, water repellent, scratch and soil resistant finish.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

## APPLICATIONS

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms

## SUBSTRATE

- Wet-formed mineral fiber

Smooth-Textured Panel

# USG CEILINGS® KITCHEN LAY-IN PANEL

## CLIMAPLUS™ PERFORMANCE


















**ORDER SAMPLES/LITERATURE**  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

**TECHNICAL SERVICES**  
 800.USG.4YOU (874-4968)

**FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL**  
 usgdesignstudio.com  
 cgcdesignstudio.com

**30** YEAR LIMITED SYSTEM WARRANTY  
 • No Visible Sag  
 • Mold/Mildew Protection




 **UL Classified**

Edge	Panel Size	Fire Rating	Item No.	NRC <sup>4</sup>	CAC Min.	LR <sup>5</sup>	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SQ 	2'x2'x5/8"	 Class A	<b>3210</b>	 -	 35	 0.90	White	 A,B,C		 24%	 \$
	2'x4'x5/8"	 Class A	<b>3410</b>	 -	 35	 0.90	White	 A,B,C		 24%	 \$

### ClimaPlus™ Warranty Performance<sup>5</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### GRID PROFILE OPTIONS

A USG DX®	B USG DXLA™	C USG ZXLA™
		

### PHYSICAL DATA

**Product literature**  
 Data sheet: SC3226

**ASTM E1264 classification**  
 ASTM E1264-22 Type IX, Form 2, Pattern G  
 ASTM E1264-23 Type A, Form A3.2, Pattern G

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**  
 Class A  
 Flame spread: 25 or less  
 Smoke developed: 50 or less

**Weight**  
 0.60 lb./sq. ft.

**Online tools**  
 usgdesignstudio.com or cgcdesignstudio.com

**Thermal resistance**  
 R-1.4

**Maximum backloading**  
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

**Maintenance**  
 Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

#### Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Do not use this product in close proximity to grease ducts.
- LR values are shown as averages.
- USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

#### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

**SC3226/rev. 10-23**  
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by  
 United States Gypsum Company  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXLA, FIRECODE, SHEETROCK, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

