


# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

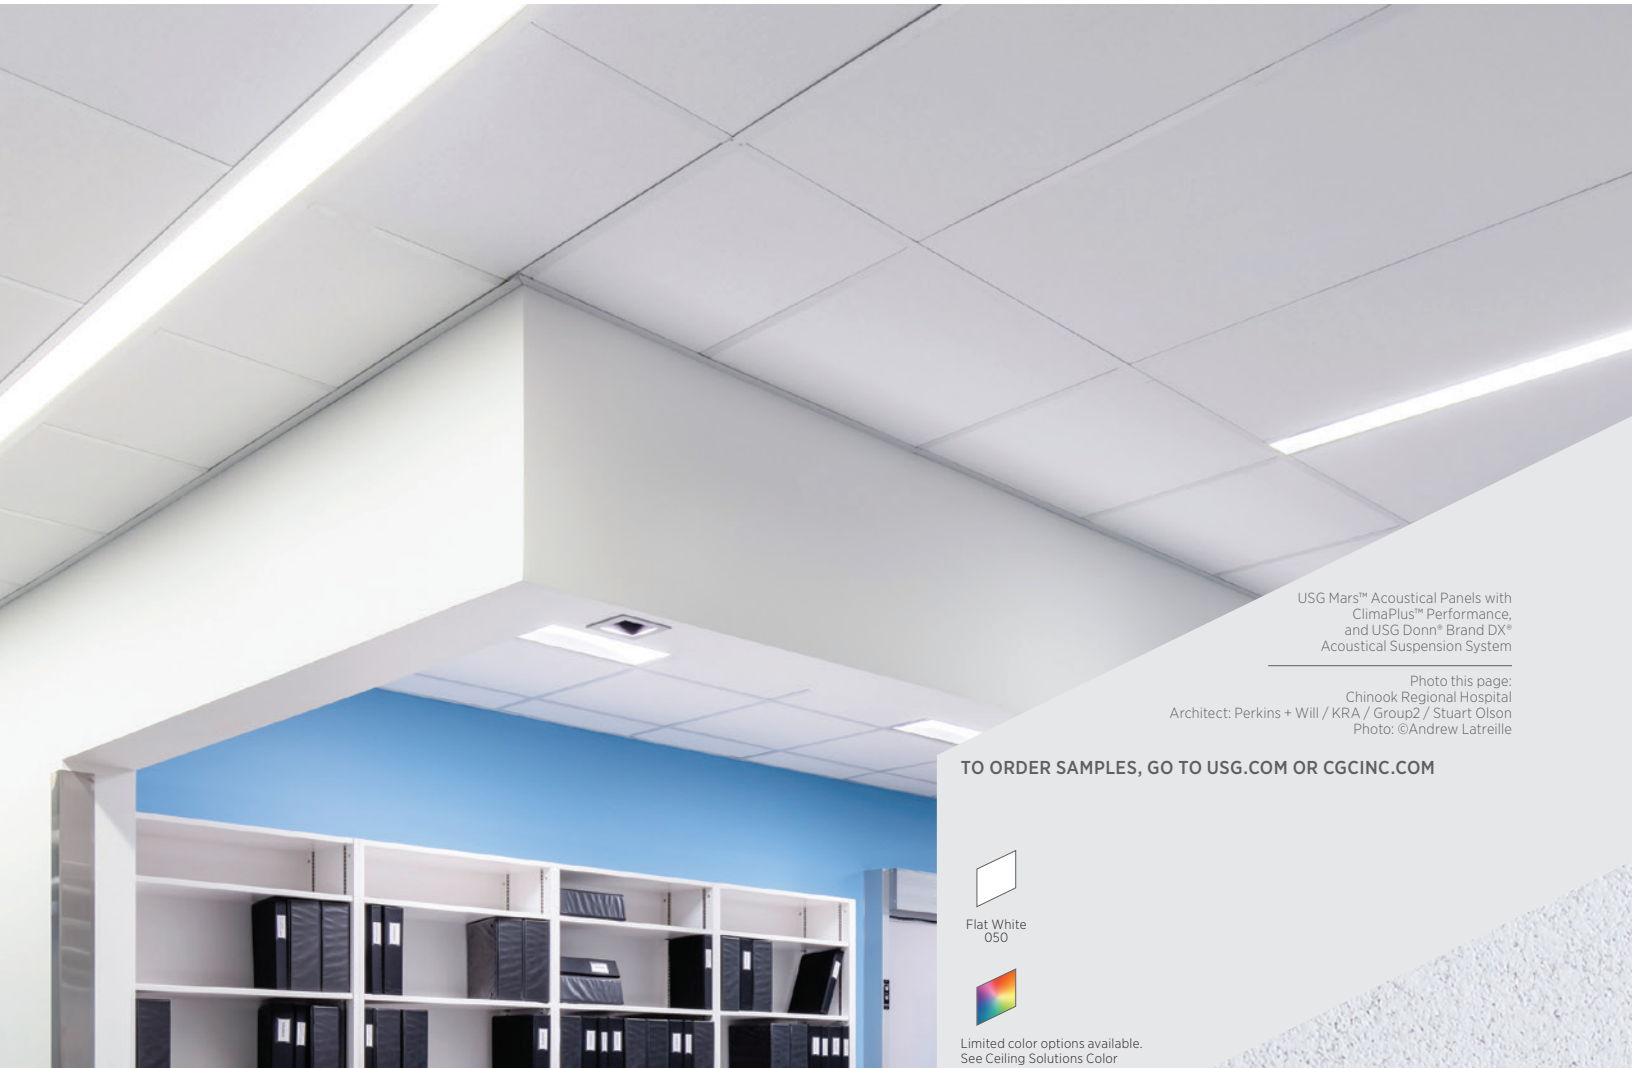

USG Mars™ Acoustical Panels with  
ClimaPlus™ Performance,  
and USG Donn® Brand DX®  
Acoustical Suspension System

Photo this page:  
Chinook Regional Hospital  
Architect: Perkins + Will / KRA / Group2 / Stuart Olson  
Photo: ©Andrew Latreille

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)



Flat White  
050



Limited color options available.  
See Ceiling Solutions Color  
Program for details.

## FEATURES AND BENEFITS

- Compatible with USG Logix™ Integrated System.
- Monolithic, structured ceiling visual using standard components.
- High light-reflective finish (LR-0.90) reduces light fixtures and energy use.
- Washable and scrubbable finish—impact and scratch resistant.
- Coordinates visually with USG Halcyon™ Logix™ Acoustical Panels for open/closed-plan applications.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- Balanced Acoustics. High-NRC and High-CAC.
- USG Mars™/Mars™ High-NRC Logix™ Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

## APPLICATIONS

- Open-plan offices
- Conference rooms
- Reception and lobby areas
- Media centers and libraries
- Airports
- Spaces with indirect or natural lighting

## SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818

30 YEAR LIMITED SYSTEM  
WARRANTY  
• No Visible Sag  
• Mold/Mildew Protection



## USG MARS™ LOGIX™ FIELD PANELS 75/35

## USG MARS™ LOGIX™ CHANNEL PANELS 75/35

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	UL Classified		LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC Min.							
SQ	20"x24"x3/4"	Class A	86519	0.75	35	0.90	White	A, B	Low		69%	\$\$
	20"x54"x3/4"	Class A	80182	0.75	35	0.90	White	A	Low		69%	\$\$
	20"x56"x3/4"	Class A	86520	0.75	35	0.90	White	A	Low		69%	\$\$
	20"x60"x3/4"	Class A	86160	0.75	35	0.90	White	A	Low		69%	\$\$
	21"x24"x3/4"	Class A	86522	0.75	35	0.90	White	A, B	Low		69%	\$\$
	21"x48"x3/4"	Class A	86523	0.75	35	0.90	White	A	Low		69%	\$\$
	22"x24"x3/4"	Class A	86524	0.75	35	0.90	White	A, B	Low		69%	\$\$
	22"x48"x3/4"	Class A	86525	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x24"x3/4"	Class A	86185	0.75	35	0.90	White	A, B	Low		69%	\$\$
	24"x42"x3/4"	Class A	86527	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x44"x3/4"	Class A	86528	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x48"x3/4"	Class A	88185	0.75	35	0.90	White	A	Low		69%	\$\$
	24"x72"x3/4"	Class A	86223	0.75	35	0.90	White	A	Low		69%	\$\$
	27"x30"x3/4"	Class A	86530	0.75	35	0.90	White	A	Low		69%	\$\$
	27"x60"x3/4"	Class A	86531	0.75	35	0.90	White	A	Low		69%	\$\$
	28"x30"x3/4"	Class A	86532	0.75	35	0.90	White	A	Low		69%	\$\$
	28"x60"x3/4"	Class A	86533	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x30"x3/4"	Class A	86815	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x54"x3/4"	Class A	86503	0.75	35	0.90	White	A	Low		69%	\$\$
	30"x56"x3/4"	Class A	86535	0.75	35	0.90	White	A	Low		69%	\$\$
30"x60"x3/4"	Class A	86536	0.75	35	0.90	White	A	Low		69%	\$\$	
SQ	4"x48"x3/4"	Class A	86514	0.75	35	0.90	White	A	Low		69%	\$\$
	4"x60"x3/4"	Class A	86515	0.75	35	0.90	White	A	Low		69%	\$\$
	4"x72"x3/4"	Class A	86537	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x48"x3/4"	Class A	86325	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x60"x3/4"	Class A	86507	0.75	35	0.90	White	A	Low		69%	\$\$
	6"x72"x3/4"	Class A	86538	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x12"x3/4"	Class A	86134	0.75 <sup>8</sup>	35 <sup>9</sup>	0.90	White	A, B	Low		69%	\$\$
	12"x24"x3/4"	Class A	86289	0.75	35	0.90	White	A, B	Low		69%	\$\$
	12"x48"x3/4"	Class A	86516	0.75	35	0.90	White	A	Low		69%	\$\$
	12"x60"x3/4"	Class A	86517	0.75	35	0.90	White	A	Low		69%	\$\$
12"x72"x3/4"	Class A	86518	0.75	35	0.90	White	A	Low		69%	\$\$	

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### ClimaPlus™ Warranty Performance<sup>3</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>


ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



## USG MARS™ LOGIX™ FIELD PANELS 75/35

## USG MARS™ LOGIX™ CHANNEL PANELS 75/35

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	UL Classified		LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC Min.							
SLT	20"x24"x3/4"	Class A	86788	0.75	35	0.90	White	C	Low	69%	\$\$	
	20"x54"x3/4"	Class A	86547	0.75	35	0.90	White	C	Low	69%	\$\$	
	20"x56"x3/4"	Class A	86548	0.75	35	0.90	White	C	Low	69%	\$\$	
	20"x60"x3/4"	Class A	86905	0.75	35	0.90	White	C	Low	69%	\$\$	
	21"x24"x3/4"	Class A	86550	0.75	35	0.90	White	C	Low	69%	\$\$	
	21"x48"x3/4"	Class A	86551	0.75	35	0.90	White	C	Low	69%	\$\$	
	22"x24"x3/4"	Class A	86552	0.75	35	0.90	White	C	Low	69%	\$\$	
	22"x48"x3/4"	Class A	86553	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x24"x3/4"	Class A	86785	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x42"x3/4"	Class A	86555	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x44"x3/4"	Class A	86556	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x48"x3/4"	Class A	88785	0.75	35	0.90	White	C	Low	69%	\$\$	
	24"x72"x3/4"	Class A	86166	0.75	35	0.90	White	C	Low	69%	\$\$	
	27"x30"x3/4"	Class A	86557	0.75	35	0.90	White	C	Low	69%	\$\$	
	27"x60"x3/4"	Class A	86558	0.75	35	0.90	White	C	Low	69%	\$\$	
	28"x30"x3/4"	Class A	86559	0.75	35	0.90	White	C	Low	69%	\$\$	
	28"x60"x3/4"	Class A	86560	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x30"x3/4"	Class A	86875	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x54"x3/4"	Class A	88686	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x56"x3/4"	Class A	86563	0.75	35	0.90	White	C	Low	69%	\$\$	
	30"x60"x3/4"	Class A	86564	0.75	35	0.90	White	C	Low	69%	\$\$	
SLT	4"x48"x3/4"	Class A	86540	0.75	35	0.90	White	C	Low	69%	\$\$	
	4"x60"x3/4"	Class A	86541	0.75	35	0.90	White	C	Low	69%	\$\$	
	4"x72"x3/4"	Class A	86565	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x48"x3/4"	Class A	86542	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x60"x3/4"	Class A	86543	0.75	35	0.90	White	C	Low	69%	\$\$	
	6"x72"x3/4"	Class A	86566	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x12"x3/4"	Class A	86135	0.75 <sup>8</sup>	35 <sup>9</sup>	0.90	White	C	Low	69%	\$\$	
	12"x24"x3/4"	Class A	86245	0.75 <sup>8</sup>	35 <sup>9</sup>	0.90	White	C	Low	69%	\$\$	
	12"x48"x3/4"	Class A	86544	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x60"x3/4"	Class A	86545	0.75	35	0.90	White	C	Low	69%	\$\$	
	12"x72"x3/4"	Class A	86546	0.75	35	0.90	White	C	Low	69%	\$\$	

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### ClimaPlus™ Warranty Performance<sup>3</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 75/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



## USG MARS™ LOGIX™ FIELD PANELS 75/35

## USG MARS™ LOGIX™ CHANNEL PANELS 75/35

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	UL Classified		LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC Min.							
FLB	20"x24"x3/4"	Class A	86329	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	20"x54"x3/4"	Class A	88845	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	20"x56"x3/4"	Class A	86571	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	20"x60"x3/4"	Class A	86164	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	21"x24"x3/4"	Class A	88840	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	21"x48"x3/4"	Class A	86573	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	22"x24"x3/4"	Class A	86574	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	22"x48"x3/4"	Class A	86575	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	24"x24"x3/4"	Class A	86985	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	24"x42"x3/4"	Class A	86577	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	24"x44"x3/4"	Class A	86578	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	24"x48"x3/4"	Class A	88985	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	24"x72"x3/4"	Class A	88996	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	27"x30"x3/4"	Class A	86850	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	27"x60"x3/4"	Class A	86579	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	28"x30"x3/4"	Class A	86834	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	28"x60"x3/4"	Class A	86580	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	30"x30"x3/4"	Class A	86830	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	30"x54"x3/4"	Class A	86831	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	30"x56"x3/4"	Class A	86583	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	30"x60"x3/4"	Class A	86267	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
FLB	4"x48"x3/4"	Class A	86568	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	4"x60"x3/4"	Class A	86569	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	4"x72"x3/4"	Class A	86584	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	6"x48"x3/4"	Class A	88887	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	6"x60"x3/4"	Class A	86835	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	6"x72"x3/4"	Class A	86567	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	12"x12"x3/4"	Class A	86136	0.75 <sup>9</sup>	35 <sup>9</sup>	0.90	White	D,E,F	Low	69%	69%	\$\$
	12"x24"x3/4"	Class A	86242	0.75 <sup>9</sup>	35 <sup>9</sup>	0.90	White	D,E,F	Low	69%	69%	\$\$
	12"x48"x3/4"	Class A	86321	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	12"x60"x3/4"	Class A	88885	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$
	12"x72"x3/4"	Class A	86570	0.75	35	0.90	White	D,E,F	Low	69%	69%	\$\$

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SQ <input type="checkbox"/>	20"x24"x7/8"	Class A	80184	0.80	35	0.90	White	A, B	Low		70%	\$\$
	20"x54"x7/8"	Class A	86410	0.80	35	0.90	White	A	Low		70%	\$\$
	20"x56"x7/8"	Class A	86411	0.80	35	0.90	White	A	Low		70%	\$\$
	20"x60"x7/8"	Class A	89501	0.80	35	0.90	White	A	Low		70%	\$\$
	21"x24"x7/8"	Class A	86414	0.80	35	0.90	White	A, B	Low		70%	\$\$
	21"x48"x7/8"	Class A	86415	0.80	35	0.90	White	A	Low		70%	\$\$
	22"x24"x7/8"	Class A	86416	0.80	35	0.90	White	A, B	Low		70%	\$\$
	22"x48"x7/8"	Class A	86417	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x24"x7/8"	Class A	86100	0.80	35	0.90	White	A, B	Low		70%	\$\$
	24"x42"x7/8"	Class A	86419	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x44"x7/8"	Class A	86420	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x48"x7/8"	Class A	86300	0.80	35	0.90	White	A	Low		70%	\$\$
	24"x72"x7/8"	Class A	86360	0.80	35	0.90	White	A	Low		70%	\$\$
	27"x30"x7/8"	Class A	86421	0.80	35	0.90	White	A	Low		70%	\$\$
	27"x60"x7/8"	Class A	86422	0.80	35	0.90	White	A	Low		70%	\$\$
	28"x30"x7/8"	Class A	86423	0.80	35	0.90	White	A	Low		70%	\$\$
	28"x60"x7/8"	Class A	86424	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x54"x7/8"	Class A	86427	0.80	35	0.90	White	A	Low		70%	\$\$
	30"x56"x7/8"	Class A	86428	0.80	35	0.90	White	A	Low		70%	\$\$
30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	A	Low		70%	\$\$	
SQ <input type="checkbox"/>	4"x48"x7/8"	Class A	86402	0.80	35	0.90	White	A	Low		70%	\$\$
	4"x60"x7/8"	Class A	86403	0.80	35	0.90	White	A	Low		70%	\$\$
	4"x72"x7/8"	Class A	86405	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x48"x7/8"	Class A	86404	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x60"x7/8"	Class A	86145	0.80	35	0.90	White	A	Low		70%	\$\$
	6"x72"x7/8"	Class A	86406	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x48"x7/8"	Class A	86407	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x60"x7/8"	Class A	86408	0.80	35	0.90	White	A	Low		70%	\$\$
	12"x72"x7/8"	Class A	86409	0.80	35	0.90	White	A	Low		70%	\$\$

## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 80/35

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder<sup>7</sup>

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35


CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative  
TECHNICAL SERVICES  
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 80/35

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder<sup>7</sup>

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	UL Classified		LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC Min.							
SLT	20"x24"x7/8"	Class A	80183	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	20"x54"x7/8"	Class A	86447	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	20"x56"x7/8"	Class A	86448	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	20"x60"x7/8"	Class A	86449	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	21"x24"x7/8"	Class A	86451	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	21"x48"x7/8"	Class A	86452	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	22"x24"x7/8"	Class A	86453	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	22"x48"x7/8"	Class A	86454	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	24"x24"x7/8"	Class A	87200	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	24"x42"x7/8"	Class A	86456	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	24"x44"x7/8"	Class A	86457	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	24"x48"x7/8"	Class A	89600	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	24"x72"x7/8"	Class A	89660	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	27"x30"x7/8"	Class A	86458	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	27"x60"x7/8"	Class A	86460	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	28"x30"x7/8"	Class A	86459	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	28"x60"x7/8"	Class A	86461	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	30"x54"x7/8"	Class A	86464	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	30"x56"x7/8"	Class A	86465	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	C	Low	70%	70%	\$\$
SLT	4"x48"x7/8"	Class A	86440	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	4"x60"x7/8"	Class A	86441	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	4"x72"x7/8"	Class A	86467	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	6"x48"x7/8"	Class A	86442	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	6"x60"x7/8"	Class A	86443	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	6"x72"x7/8"	Class A	86468	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	12"x48"x7/8"	Class A	86444	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	12"x60"x7/8"	Class A	86445	0.80	35	0.90	White	C	Low	70%	70%	\$\$
	12"x72"x7/8"	Class A	86446	0.80	35	0.90	White	C	Low	70%	70%	\$\$

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### ClimaPlus™ Warranty Performance<sup>3</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 80/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/CG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
FLB 	20"x24"x7/8"	Class A	86693	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	20"x54"x7/8"	Class A	86479	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	20"x56"x7/8"	Class A	86480	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	20"x60"x7/8"	Class A	86481	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	21"x24"x7/8"	Class A	86483	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	21"x48"x7/8"	Class A	86484	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	22"x24"x7/8"	Class A	86485	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	22"x48"x7/8"	Class A	86486	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x24"x7/8"	Class A	87100	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x42"x7/8"	Class A	86488	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x44"x7/8"	Class A	86489	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x48"x7/8"	Class A	89500	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	24"x72"x7/8"	Class A	89670	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	27"x30"x7/8"	Class A	86490	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	27"x60"x7/8"	Class A	86491	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	28"x30"x7/8"	Class A	86492	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	28"x60"x7/8"	Class A	86493	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x54"x7/8"	Class A	86501	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	30"x56"x7/8"	Class A	86496	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	D, E, F	Low		70%	\$\$	
FLB 	4"x48"x7/8"	Class A	86475	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	4"x60"x7/8"	Class A	86476	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	4"x72"x7/8"	Class A	86473	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x48"x7/8"	Class A	86331	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x60"x7/8"	Class A	86333	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	6"x72"x7/8"	Class A	86474	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x48"x7/8"	Class A	86505	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x60"x7/8"	Class A	86477	0.80	35	0.90	White	D, E, F	Low		70%	\$\$
	12"x72"x7/8"	Class A	86478	0.80	35	0.90	White	D, E, F	Low		70%	\$\$

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). \*Certificates of Compliance\* for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 80/35

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 80/35

Plant-Based Binder<sup>7</sup>

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative  
TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SQ <input type="checkbox"/>	20"x24"x7/8"	Class A	80186	0.85	35	0.90	White	A, B	Low		69%	\$\$
	20"x54"x7/8"	Class A	80100	0.85	35	0.90	White	A	Low		69%	\$\$
	20"x56"x7/8"	Class A	80101	0.85	35	0.90	White	A	Low		69%	\$\$
	20"x60"x7/8"	Class A	80102	0.85	35	0.90	White	A	Low		69%	\$\$
	21"x24"x7/8"	Class A	80103	0.85	35	0.90	White	A,B	Low		69%	\$\$
	21"x48"x7/8"	Class A	80104	0.85	35	0.90	White	A	Low		69%	\$\$
	22"x24"x7/8"	Class A	80105	0.85	35	0.90	White	A,B	Low		69%	\$\$
	22"x48"x7/8"	Class A	80106	0.85	35	0.90	White	A	Low		69%	\$\$
	24"x24"x7/8"	Class A	88134	0.85	35	0.90	White	A,B	Low		69%	\$\$
	24"x42"x7/8"	Class A	80107	0.85	35	0.90	White	A	Low		69%	\$\$
	24"x44"x7/8"	Class A	80108	0.85	35	0.90	White	A	Low		69%	\$\$
	24"x48"x7/8"	Class A	89134	0.85	35	0.90	White	A	Low		69%	\$\$
	24"x72"x7/8"	Class A	89663	0.85	35	0.90	White	A	Low		69%	\$\$
	27"x30"x7/8"	Class A	80109	0.85	35	0.90	White	A	Low		69%	\$\$
	27"x60"x7/8"	Class A	80110	0.85	35	0.90	White	A	Low		69%	\$\$
	28"x30"x7/8"	Class A	80111	0.85	35	0.90	White	A	Low		69%	\$\$
	28"x60"x7/8"	Class A	80112	0.85	35	0.90	White	A	Low		69%	\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	A	Low		69%	\$\$
	30"x54"x7/8"	Class A	80114	0.85	35	0.90	White	A	Low		69%	\$\$
	30"x56"x7/8"	Class A	80115	0.85	35	0.90	White	A	Low		69%	\$\$
30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	A	Low		69%	\$\$	
SQ <input type="checkbox"/>	4"x48"x7/8"	Class A	80116	0.85	35	0.90	White	A	Low		69%	\$\$
	4"x60"x7/8"	Class A	80117	0.85	35	0.90	White	A	Low		69%	\$\$
	4"x72"x7/8"	Class A	80118	0.85	35	0.90	White	A	Low		69%	\$\$
	6"x48"x7/8"	Class A	80119	0.85	35	0.90	White	A	Low		69%	\$\$
	6"x60"x7/8"	Class A	80120	0.85	35	0.90	White	A	Low		69%	\$\$
	6"x72"x7/8"	Class A	80121	0.85	35	0.90	White	A	Low		69%	—
	12"x12"x7/8"	Class A	80122	0.85	35	0.90	White	A, B	Low		69%	\$\$
	12"x24"x7/8"	Class A	86665	0.85	35	0.90	White	A, B	Low		69%	\$\$
	12"x48"x7/8"	Class A	80123	0.85	35	0.90	White	A	Low		69%	\$\$
	12"x60"x7/8"	Class A	80124	0.85	35	0.90	White	A	Low		69%	\$\$
12"x72"x7/8"	Class A	80125	0.85	35	0.90	White	A	Low		69%	\$\$	

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### ClimaPlus™ Warranty Performance<sup>3</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 85/35

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 85/35

Plant-Based Binder<sup>7</sup>



# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SLT 	20"x24"x7/8"	Class A	80185	0.85	35	0.90	White	C	Low		69%	\$\$
	20"x54"x7/8"	Class A	80126	0.85	35	0.90	White	C	Low		69%	\$\$
	20"x56"x7/8"	Class A	80127	0.85	35	0.90	White	C	Low		69%	\$\$
	20"x60"x7/8"	Class A	80128	0.85	35	0.90	White	C	Low		69%	\$\$
	21"x24"x7/8"	Class A	80129	0.85	35	0.90	White	C	Low		69%	\$\$
	21"x48"x7/8"	Class A	80130	0.85	35	0.90	White	C	Low		69%	\$\$
	22"x24"x7/8"	Class A	80131	0.85	35	0.90	White	C	Low		69%	\$\$
	22"x48"x7/8"	Class A	80132	0.85	35	0.90	White	C	Low		69%	\$\$
	24"x24"x7/8"	Class A	88135	0.85	35	0.90	White	C	Low		69%	\$\$
	24"x42"x7/8"	Class A	80133	0.85	35	0.90	White	C	Low		69%	\$\$
	24"x44"x7/8"	Class A	80134	0.85	35	0.90	White	C	Low		69%	\$\$
	24"x48"x7/8"	Class A	89135	0.85	35	0.90	White	C	Low		69%	\$\$
	24"x72"x7/8"	Class A	89665	0.85	35	0.90	White	C	Low		69%	\$\$
	27"x30"x7/8"	Class A	80135	0.85	35	0.90	White	C	Low		69%	\$\$
	27"x60"x7/8"	Class A	80136	0.85	35	0.90	White	C	Low		69%	\$\$
	28"x30"x7/8"	Class A	80137	0.85	35	0.90	White	C	Low		69%	\$\$
28"x60"x7/8"	Class A	80138	0.85	35	0.90	White	C	Low		69%	\$\$	
30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	C	Low		69%	\$\$	
30"x54"x7/8"	Class A	80140	0.85	35	0.90	White	C	Low		69%	\$\$	
30"x56"x7/8"	Class A	80141	0.85	35	0.90	White	C	Low		69%	\$\$	
30"x60"x7/8"	Class A	89141	0.85	35	0.90	White	C	Low		69%	\$\$	
SLT 	4"x48"x7/8"	Class A	80142	0.85	35	0.90	White	C	Low		69%	\$\$
	4"x60"x7/8"	Class A	80143	0.85	35	0.90	White	C	Low		69%	\$\$
	4"x72"x7/8"	Class A	80144	0.85	35	0.90	White	C	Low		69%	\$\$
	6"x48"x7/8"	Class A	80145	0.85	35	0.90	White	C	Low		69%	\$\$
	6"x60"x7/8"	Class A	80146	0.85	35	0.90	White	C	Low		69%	\$\$
	6"x72"x7/8"	Class A	80147	0.85	35	0.90	White	C	Low		69%	\$\$
	12"x12"x7/8"	Class A	80148	0.85	35	0.90	White	C	Low		69%	\$\$
	12"x24"x7/8"	Class A	86664	0.85	35	0.90	White	C	Low		69%	\$\$
	12"x48"x7/8"	Class A	80149	0.85	35	0.90	White	C	Low		69%	\$\$
	12"x60"x7/8"	Class A	80150	0.85	35	0.90	White	C	Low		69%	\$\$
	12"x72"x7/8"	Class A	80151	0.85	35	0.90	White	C	Low		69%	\$\$

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 85/35

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 85/35

Plant-Based Binder<sup>7</sup>

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 85/35

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
FLB	20"x24"x7/8"	Class A	86499	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x54"x7/8"	Class A	80152	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x56"x7/8"	Class A	80153	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	20"x60"x7/8"	Class A	80154	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x24"x7/8"	Class A	80155	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	21"x48"x7/8"	Class A	80156	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x24"x7/8"	Class A	80157	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	22"x48"x7/8"	Class A	80158	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x24"x7/8"	Class A	88136	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x42"x7/8"	Class A	80159	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x44"x7/8"	Class A	80160	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x48"x7/8"	Class A	89136	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	24"x72"x7/8"	Class A	89668	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x30"x7/8"	Class A	80161	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	27"x60"x7/8"	Class A	80162	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x30"x7/8"	Class A	80163	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	28"x60"x7/8"	Class A	80164	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x54"x7/8"	Class A	80166	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	30"x56"x7/8"	Class A	80167	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	D,E,F	Low		69%	\$\$	
FLB	4"x48"x7/8"	Class A	80168	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x60"x7/8"	Class A	80169	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	4"x72"x7/8"	Class A	80170	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x48"x7/8"	Class A	80171	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x60"x7/8"	Class A	80172	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	6"x72"x7/8"	Class A	80173	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x12"x7/8"	Class A	80174	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x24"x7/8"	Class A	86663	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x48"x7/8"	Class A	80175	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
	12"x60"x7/8"	Class A	80176	0.85	35	0.90	White	D,E,F	Low		69%	\$\$
12"x72"x7/8"	Class A	80177	0.85	35	0.90	White	D,E,F	Low		69%	\$\$	

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG MARS™ HIGH-NRC  
LOGIX™ FIELD PANELS  
85/35  
Plant-Based Binder<sup>7</sup>

USG MARS™ HIGH-NRC  
LOGIX™ CHANNEL PANELS  
85/35  
Plant-Based Binder<sup>7</sup>

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>


ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SQ 	20"x24"x1"	Class A	80188	0.90	30	0.90	White	A, B	Low		67%	\$\$
	20"x54"x1"	Class A	80200	0.90	30	0.90	White	A	Low		67%	\$\$
	20"x56"x1"	Class A	80201	0.90	30	0.90	White	A	Low		67%	\$\$
	20"x60"x1"	Class A	80202	0.90	30	0.90	White	A	Low		67%	\$\$
	21"x24"x1"	Class A	80203	0.90	30	0.90	White	A,B	Low		67%	\$\$
	21"x48"x1"	Class A	80204	0.90	30	0.90	White	A	Low		67%	\$\$
	22"x24"x1"	Class A	80205	0.90	30	0.90	White	A,B	Low		67%	\$\$
	22"x48"x1"	Class A	80206	0.90	30	0.90	White	A	Low		67%	\$\$
	24"x24"x1"	Class A	88137	0.90	30	0.90	White	A,B	Low		67%	\$\$
	24"x42"x1"	Class A	80207	0.90	30	0.90	White	A	Low		67%	\$\$
	24"x44"x1"	Class A	80208	0.90	30	0.90	White	A	Low		67%	\$\$
	24"x48"x1"	Class A	89137	0.90	30	0.90	White	A	Low		67%	\$\$
	24"x72"x1"	Class A	89674	0.90	30	0.90	White	A	Low		67%	\$\$
	27"x30"x1"	Class A	80209	0.90	30	0.90	White	A	Low		67%	\$\$
	27"x60"x1"	Class A	80210	0.90	30	0.90	White	A	Low		67%	\$\$
	28"x30"x1"	Class A	80211	0.90	30	0.90	White	A	Low		67%	\$\$
	28"x60"x1"	Class A	80212	0.90	30	0.90	White	A	Low		67%	\$\$
	30"x30"x1"	Class A	80213	0.90	30	0.90	White	A	Low		67%	\$\$
	30"x54"x1"	Class A	80214	0.90	30	0.90	White	A	Low		67%	\$\$
	30"x56"x1"	Class A	80215	0.90	30	0.90	White	A	Low		67%	\$\$
30"x60"x1"	Class A	89143	0.90	30	0.90	White	A	Low		67%	\$\$	
SQ 	4"x48"x1"	Class A	80216	0.90	30	0.90	White	A	Low		67%	\$\$
	4"x60"x1"	Class A	80217	0.90	30	0.90	White	A	Low		67%	\$\$
	4"x72"x1"	Class A	80218	0.90	30	0.90	White	A	Low		67%	\$\$
	6"x48"x1"	Class A	80219	0.90	30	0.90	White	A	Low		67%	\$\$
	6"x60"x1"	Class A	80220	0.90	30	0.90	White	A	Low		67%	\$\$
	6"x72"x1"	Class A	80221	0.90	30	0.90	White	A	Low		67%	\$\$
	12"x12"x1"	Class A	80222	0.90	30	0.90	White	A, B	Low		67%	\$\$
	12"x24"x1"	Class A	86137	0.90	30	0.90	White	A, B	Low		67%	\$\$
	12"x48"x1"	Class A	80223	0.90	30	0.90	White	A	Low		67%	\$\$
	12"x60"x1"	Class A	80224	0.90	30	0.90	White	A	Low		67%	\$\$
12"x72"x1"	Class A	80225	0.90	30	0.90	White	A	Low		67%	\$\$	

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 90/30

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 90/30

Plant-Based Binder<sup>7</sup>

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>


ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



UL Classified

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
SLT 	20"x24"x1"	Class A	80187	0.90	30	0.90	White	C	Low		67%	\$\$
	20"x54"x1"	Class A	80226	0.90	30	0.90	White	C	Low		67%	\$\$
	20"x56"x1"	Class A	80227	0.90	30	0.90	White	C	Low		67%	\$\$
	20"x60"x1"	Class A	80228	0.90	30	0.90	White	C	Low		67%	\$\$
	21"x24"x1"	Class A	80229	0.90	30	0.90	White	C	Low		67%	\$\$
	21"x48"x1"	Class A	80230	0.90	30	0.90	White	C	Low		67%	\$\$
	22"x24"x1"	Class A	80231	0.90	30	0.90	White	C	Low		67%	\$\$
	22"x48"x1"	Class A	80232	0.90	30	0.90	White	C	Low		67%	\$\$
	24"x24"x1"	Class A	88138	0.90	30	0.90	White	C	Low		67%	\$\$
	24"x42"x1"	Class A	80233	0.90	30	0.90	White	C	Low		67%	\$\$
	24"x44"x1"	Class A	80234	0.90	30	0.90	White	C	Low		67%	\$\$
	24"x48"x1"	Class A	89138	0.90	30	0.90	White	C	Low		67%	\$\$
	24"x72"x1"	Class A	89675	0.90	30	0.90	White	C	Low		67%	\$\$
	27"x30"x1"	Class A	80235	0.90	30	0.90	White	C	Low		67%	\$\$
	27"x60"x1"	Class A	80236	0.90	30	0.90	White	C	Low		67%	\$\$
	28"x30"x1"	Class A	80237	0.90	30	0.90	White	C	Low		67%	\$\$
	28"x60"x1"	Class A	80238	0.90	30	0.90	White	C	Low		67%	\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	C	Low		67%	\$\$
	30"x54"x1"	Class A	80240	0.90	30	0.90	White	C	Low		67%	\$\$
	30"x56"x1"	Class A	80241	0.90	30	0.90	White	C	Low		67%	\$\$
30"x60"x1"	Class A	89144	0.90	30	0.90	White	C	Low		67%	\$\$	
SLT 	4"x48"x1"	Class A	80242	0.90	30	0.90	White	C	Low		67%	\$\$
	4"x60"x1"	Class A	80243	0.90	30	0.90	White	C	Low		67%	\$\$
	4"x72"x1"	Class A	80244	0.90	30	0.90	White	C	Low		67%	\$\$
	6"x48"x1"	Class A	80245	0.90	30	0.90	White	C	Low		67%	\$\$
	6"x60"x1"	Class A	80246	0.90	30	0.90	White	C	Low		67%	\$\$
	6"x72"x1"	Class A	80247	0.90	30	0.90	White	C	Low		67%	\$\$
	12"x12"x1"	Class A	80248	0.90	30	0.90	White	C	Low		67%	\$\$
	12"x24"x1"	Class A	86138	0.90	30	0.90	White	C	Low		67%	\$\$
	12"x48"x1"	Class A	80249	0.90	30	0.90	White	C	Low		67%	\$\$
	12"x60"x1"	Class A	80250	0.90	30	0.90	White	C	Low		67%	\$\$
	12"x72"x1"	Class A	80251	0.90	30	0.90	White	C	Low		67%	\$\$

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS 90/30

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplit@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818



## USG MARS™ HIGH-NRC LOGIX™ FIELD PANELS 90/30

Plant-Based Binder<sup>7</sup>

## USG MARS™ HIGH-NRC LOGIX™ CHANNEL PANELS 90/30

Plant-Based Binder<sup>7</sup>

Edge	Panel Size <sup>5</sup>	Fire Rating	Item No.	UL Classified		LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC Min.							
FLB	20"x24"x1"	Class A	80181	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	20"x54"x1"	Class A	80252	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	20"x56"x1"	Class A	80253	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	20"x60"x1"	Class A	80254	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	21"x24"x1"	Class A	80255	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	21"x48"x1"	Class A	80256	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	22"x24"x1"	Class A	80257	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	22"x48"x1"	Class A	80258	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	24"x24"x1"	Class A	88139	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	24"x42"x1"	Class A	80259	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	24"x44"x1"	Class A	80260	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	24"x48"x1"	Class A	89139	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	24"x72"x1"	Class A	89678	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	27"x30"x1"	Class A	80261	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	27"x60"x1"	Class A	80262	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	28"x30"x1"	Class A	80263	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	28"x60"x1"	Class A	80264	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	30"x54"x1"	Class A	80266	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	30"x56"x1"	Class A	80267	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
30"x60"x1"	Class A	89145	0.90	30	0.90	White	D,E,F	Low		67%	\$\$	
FLB	4"x48"x1"	Class A	80268	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	4"x60"x1"	Class A	80269	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	4"x72"x1"	Class A	80270	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	6"x48"x1"	Class A	80271	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	6"x60"x1"	Class A	80272	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	6"x72"x1"	Class A	80273	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	12"x12"x1"	Class A	80274	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	12"x24"x1"	Class A	86139	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	12"x48"x1"	Class A	80275	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	12"x60"x1"	Class A	80276	0.90	30	0.90	White	D,E,F	Low		67%	\$\$
	12"x72"x1"	Class A	80277	0.90	30	0.90	White	D,E,F	Low		67%	\$\$

**Low Emissions (VOC)**  
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

**ClimaPlus™ Warranty Performance<sup>3</sup>**  
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

# USG MARS™/MARS™ HIGH-NRC LOGIX™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER<sup>7</sup>

**ORDER SAMPLES/LITERATURE**  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

**TECHNICAL SERVICES**  
800 USG.4YOU (874-4968)


**FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL**  
usgdesignstudio.com  
cgcdesignstudio.com



PRODUCT CERTIFIED  
FOR LOW CHEMICAL  
EMISSIONS:  
ULCOM/GG  
UL2818

## GRID PROFILE OPTIONS

## PHYSICAL DATA/ FOOTNOTES



A USG DX®	B <sup>4</sup> USG Centricitee™ DXT™	C USG DX®	D USG Centricitee™ DXT™	E USG Finline® DXF™	F USG Identitee® DXI™

**Product literature**  
Data sheet: IS274  
System guide: IS268

**ASTM E1264 classification**

ASTM E1264-22: Type IV, Form 1 and 2, Pattern E & G  
ASTM E1264-23: Type A, Form A2.1 and A2.2, Pattern E & G

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**

Class A  
Flame spread: 25 or less  
Smoke developed: 50 or less

**Weight**  
1.01 lb./sq. ft. (3/4")  
1.09-1.12 lb./sq. ft. (7/8")  
1.25 lb./sq. ft. (1")

**Online tools**  
usgdesignstudio.com or cgcdesignstudio.com

**Thermal resistance**  
R-2.2 (3/4")

**Maintenance**  
Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean white cloth with water or a mild detergent and wipe surface.

**Maximum backloading**  
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

- Notes**
- For details see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
  - LR values are shown as averages.
  - Panel face and back surfaces treated with a proprietary broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mold and mildew. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102).
  - Maximum 2'x2' with SQ edge panels.
  - Stabilizer bar required if opening ≥ 60".
  - Select custom color panels are available in limited sizes and edge profiles. Minimum order quantities apply. Please contact your local sales representative for availability, pricing, minimum order quantities and lead times.
  - All USG Mars™ High NRC Acoustical Panels with a "plant-based binder" label contain up to 65% plant-based material in the binder. For more information please refer to the USG Mars™ Acoustical Panels Health Product Declaration, available at www.usg.com
  - Tested in accordance with ASTM C423 in USG Acoustical Test Facility (NVLAP Lab Code: 200132-0); not UL classified for acoustics.
  - Tested in accordance with ASTM E1414 in USG Acoustical Test Facility (NVLAP Lab Code: 200132-0); not UL classified for acoustics.
  - It is not recommended to mix panels with varying NRC values in the same ceiling plane.

**Notice**

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

**IS274/rev. 3-24**

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by  
USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXI, DXT, ECOBLUEPRINT, FINELINE, HALCYON, IDENTITEE, LOGIX, MARS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

