



Great Stuff™ Pro


Gaps & Cracks Fireblock Sealant



In addition to being the preferred choice of professionals for filling and air-sealing small holes, gaps and cracks, Great Stuff Pro Gaps and Cracks insulating foam sealant also acts as a fireblocking material to help prevent the spread of fire and smoke.

PRODUCT FEATURES

- Fireblock sealant for residential Type V applications
- Fills, seals and insulates gaps up to 3"
- Bonds to most building materials
- High yield—up to 1,000 linear ft x 3/8" bead
- Controlled expansion
- Quick cure and trim
- Identifiable orange color
- One can = 26 quart tubes of caulk

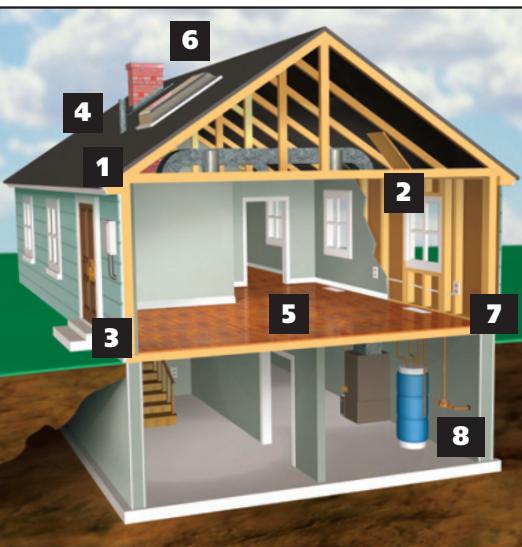

GREAT STUFF PRO USES

1. Wall and roof intersections
2. Attic access
3. Sill plates
4. Water and furnace flues
5. HVAC duct penetrations
6. Chimney flashing
7. Electrical penetrations
8. Plumbing and utility penetrations



Wind-lock®
Your faithful business companion

1055 Leiscz's Bridge Road • Leesport, PA 19533
610-926-6815 • 1-800-872-5625 • Fax: 1-800-854-6614
www.wind-lock.com



Great Stuff™ Pro

Gaps & Cracks Fireblock Sealant

PRODUCT DESCRIPTION

Great Stuff Pro Gaps & Cracks is a one-component, multipurpose, low-expansion construction filler and fireblock sealant.

APPLICATIONS

Filling, sealing and insulating of joints, voids, and cavities. Also approved for use as an alternative fireblocking material in indoor and outdoor-to-indoor plumbing, HVAC, gas and electrical penetrations.

INSTALLATION

Read all instructions and safety information (MSDS) before using any product. Foam bonds to skin quickly — wear gloves, eye protection and work clothes during application. Use drop cloths.

Surface Preparation: Surface should be free of oil, grease and excess moisture.

Application: Great Stuff Pro is applied with a gun applicator at the junction of the plate line and the slab or foundation, any penetration through the top or the bottom of the plate line, cracks and holes in the exterior sheathing from penetration made for utility services, corner and T-wall intersections, and any other place where air might penetrate the exterior envelope.

Storage: Store in cool dry area in upright position.

Limitations: Great Stuff Pro professional foam should not be left permanently exposed to ultraviolet light.

DOW GREAT STUFF PRO TECHNICAL DATA

Property	Test Method	Gaps & Cracks
Basis	—	MDI monomer, polyurethane resin propane/isobutene
Characteristics	—	Semi-Rigid
UL Classified (Class 1)	ASTM E-84	Flame Spread 20/Smoke Developed 20
Color	—	Orange
Density	ASTM D-1622	1.06
Thermal Resistance (R Value)	ASTM C-518	4
Percent Closed Cell Content	ASTM D-2856	>61.63
Application Temperature	—	25°F to 90°F
Storage Temperature	—	Up to 120°F
Service Temperature	—	-200°F to +200°F
Shelf Life	—	12 months
Tack Free Time	—	6-7 minutes
Cure time	—	1 hour
Cutting time	—	30 minutes
Yield 24 oz can	Bead Size	Linear Feet
	3/8"	1000

ORDERING INFORMATION

Great Stuff Pro—Gaps & Cracks

PART CODE: W-GSGCFB (Case of 12 cans, Gun Foam)
W-GSTGCFB (Case of 12 cans, Straw Foam)



Approved for use as an alternative fireblocking material by the International Code Council (ICC) per National Evaluation Report No. NER-645.



Distributed by: