


# PRODUCT SUBMITTAL

**WIRE-BOND**

**#3420 Bond Beam Rebar Positioner** Patent No. US 8448404B2

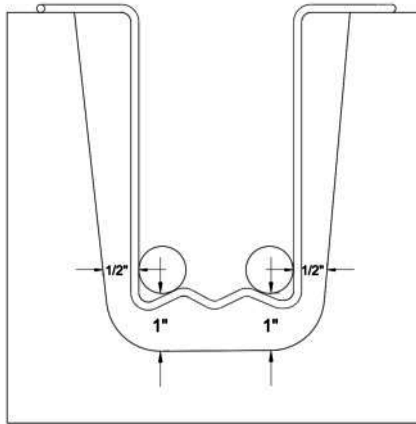

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum

**ASTM A951/A951M** (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

**ACI / ASCE 530** (Building Code Requirements for Masonry Structures)

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft) Wire

(Stainless Steel): **ASTM A580/ASTM 580M - AISI** Type 304  
(Type 316 available on special orders)



**Recycled Content:**

Hot Dipped,  
82.8% Post-Consumer  
17% Post Industrial / Pre Consumer

**Stainless Steel**

97% Pre-Consumer V O C Content - 0%

**# 3420 Bond Beam Rebar Positioner:**

9 gauge diameter standard

**CMU:** 8" 12"

**Finishes:**

Mill Galvanized

Hot Dip Galvanized

Stainless Steel

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113