


# PRODUCT SUBMITTAL

**WIRE-BOND**

## # 3500 Continuous Wire (Straight & Cut)

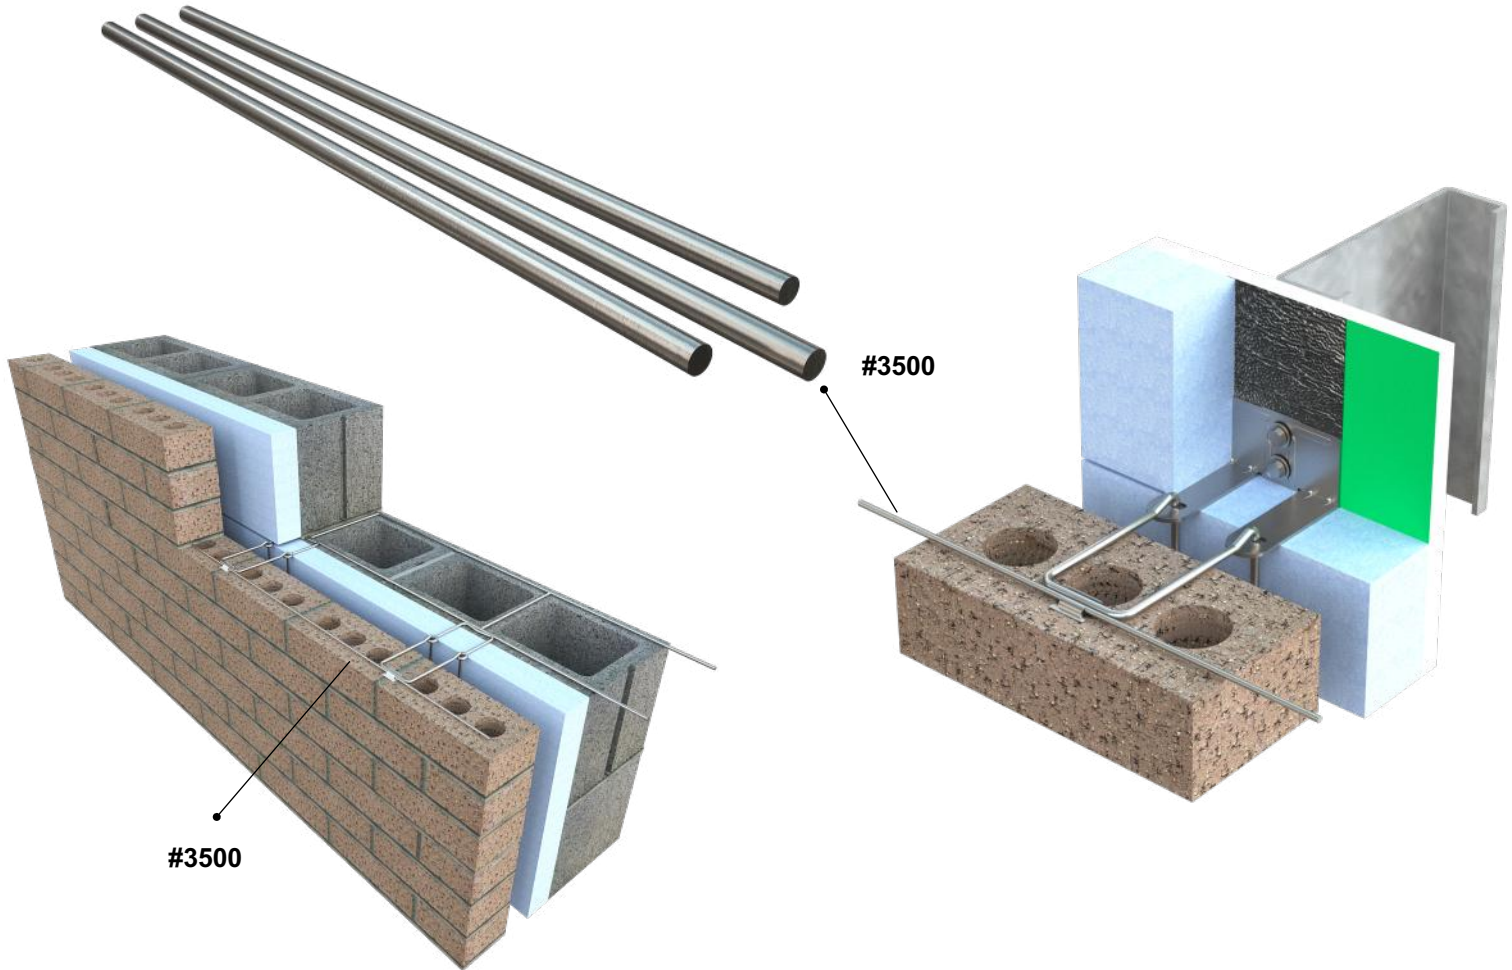

### MATERIAL CONFORMANCE

**ASTM A1064/A1064M, ASTM A82 / A82M** - (Cold drawn steel wire)  
 Tensile Strength - 80,000 psi  
 Yield Point - 70,000 psi

**ACI / ASCE 530** - (Building code requirements for masonry structures)

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating  
**ASTM A153 / A153M-B2 (1.50 oz per sq ft)**

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

### SIZES / FINISHES

**Continuous Wire:** 10' - 0 Lengths      9gauge      3/16" dia.

**FINISH:**

Mill Galvanized      Hot Dip Galvanized      Stainless Steel

**Recycled Content:**  
 Mill Galvanized & Hot Dipped,      Stainless Steel,  
 82.8% Post-Consumer      60% Post Consumer  
 17% Post Industrial / Pre-Consumer,      V O C Content - 0%



**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113