


PRODUCT SUBMITTAL

WIRE-BOND

2222 Dovetail Anchor Seismic

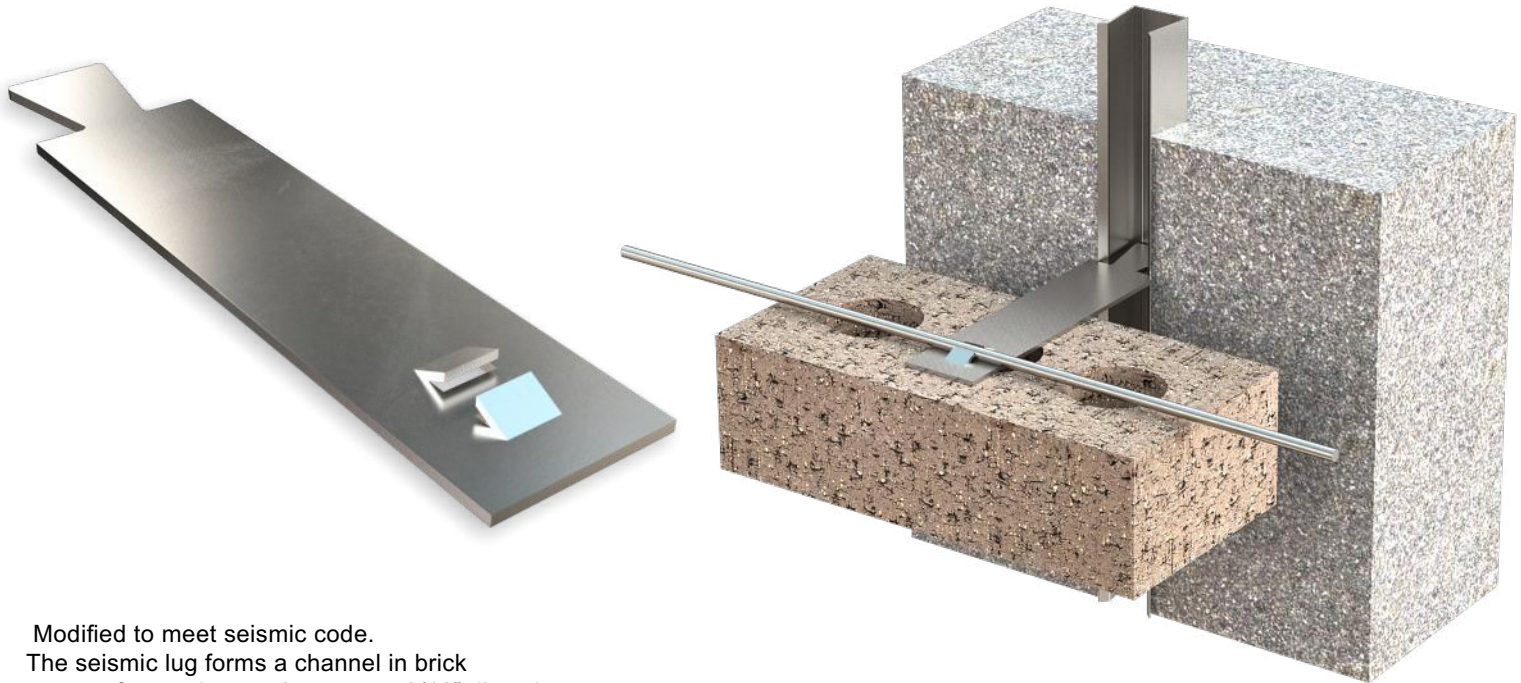

Modified to meet seismic code.
The seismic lug forms a channel in brick veneer for continuous 9 gauge or 3/16" dia. wire.

MATERIAL CONFORMANCE	SIZES / FINISHES		
SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M	# 2222: 1" wide standard		
Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)	12 gauge	14 gauge	16 gauge
Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)	Lengths:		
Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)	3-1/2"	4-1/2"	5-1/2"
ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi	Other _____		
ACI / ASCE 530 - (Building code requirements for masonry structures)	Straight & Cut Seismic Wire:		
Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,	9 gauge	3/16"	
Stainless Steel, 60% Post Consumer V O C Content - 0%	FINISH: Mill Galvanized Hot Dip Galvanized Stainless Steel		



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113