



PRODUCT SUBMITTAL

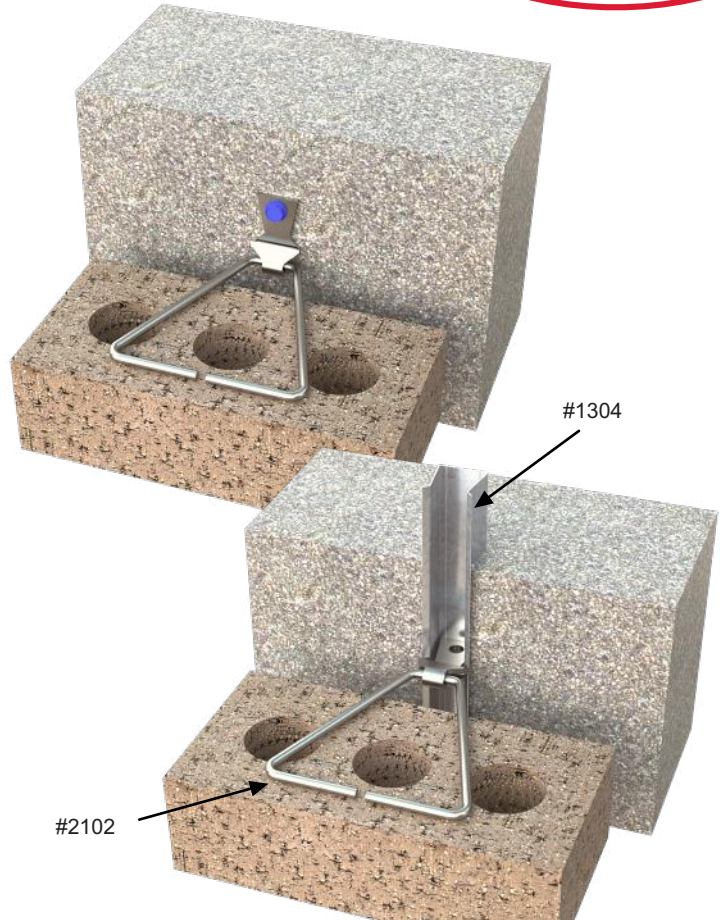

2102 Dovetail Triangular Tie

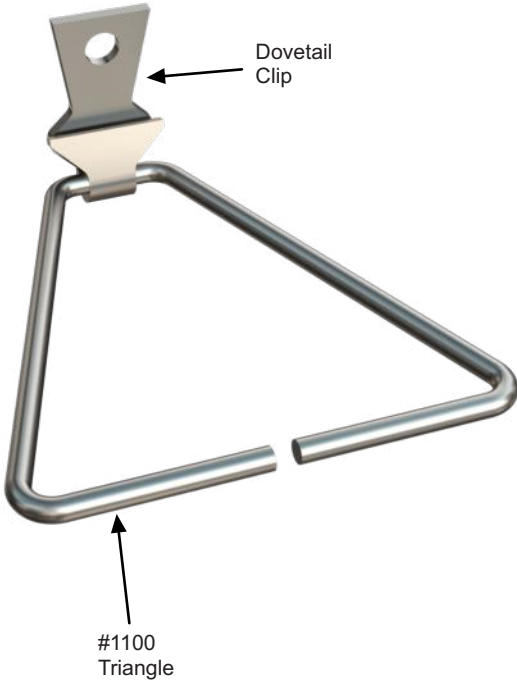

MATERIAL CONFORMANCE	SIZES / FINISHES		
<p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304 (Type 316 available on special order)</p> <p>ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p># 1100 Triangle Diameter:</p> <p>3/16" dia. 1/4" dia.</p>	<p># 1100 Triangle Size:</p> <p>3" x 3" 6" x 6" 4" x 4" 7" x 7" 5" x 5" 7" x 9"</p>	
	<p># Dovetail Clip:</p> <p>■ 12ga x 1" with 5/16" Hole</p>		
	<p>Finish:</p> <p>Mill Galvanized Hot Dip Stainless Steel</p>		
	<p># 1304 Dovetail Slot:</p> <p>22 gauge 24 gauge 26 gauge</p>		
	<p>Standard Dimensions:</p> <p>1" width x 10'-0" length foam filled</p>		
	<p>Finish:</p> <p>Mill Galvanized Hot Dip Stainless Steel</p>		



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113