


PRODUCT SUBMITTAL

WIRE-BOND

410 Stainless Steel Screw with washer

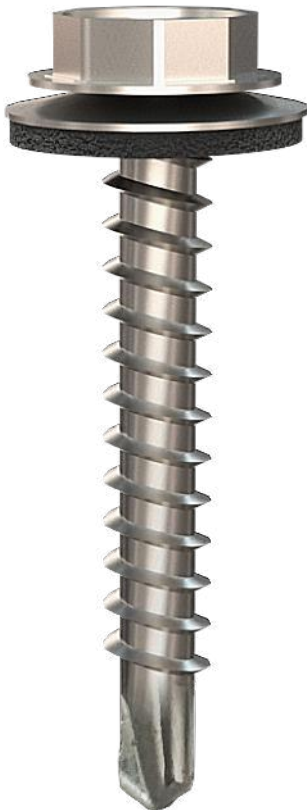

Disclaimer: All test results and specifications are based on laboratory tests. Appropriate safety factors should be used by the user or specifier. Determining the proper fastener is the responsibility of the user or specifier. Because application conditions vary, we assume no responsibility for the use of this information.

MATERIAL CONFORMANCE / SIZE

410 STAINLESS STEEL SCREWS:

410 Stainless Steel: **ASTM A267**

ASTM C954: Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. **(2.84 mm) in Thickness**

410 Stainless Steel -.00015" min electro zinc plated Sharp non-walking point for fast penetration into high tensile steel. 410 stainless steel heat treated for optimal strength and corrosion resistance.

Size: #10-16 x 1-1/2"

Point Type: DP3
Head Style: 5/16" HWH
Drilling Thickness: .036" - .175"
Max Material Thickness: 1.078"

Fastener Diameter: #10 - 16 (.190")
Torsional (Inch Lbs): 61
Tensile (pounds): 2100
Shear (Pounds): 1400

PULLOUT VALUES / SHEAR VALUES

Pullout Values in Steel (Average Ultimate Pounds)

Steel Thickness	#10 -16 (DP3)
26ga	126
24ga	208
22ga	267
20ga	295
18ga	503
16ga	710
14ga	968
12ga	1476

Shear Values in Steel (Average Ultimate Pounds)

Steel Thickness	#10 -16 (DP3)
20ga	728
18ga	1266
16ga	1540
14ga	1552

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761
Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449
Mailing Address: P.O. Box 13124 Memphis, TN 38113