



# PRODUCT SUBMITTAL



## # 1100C Triangle (Seismic)

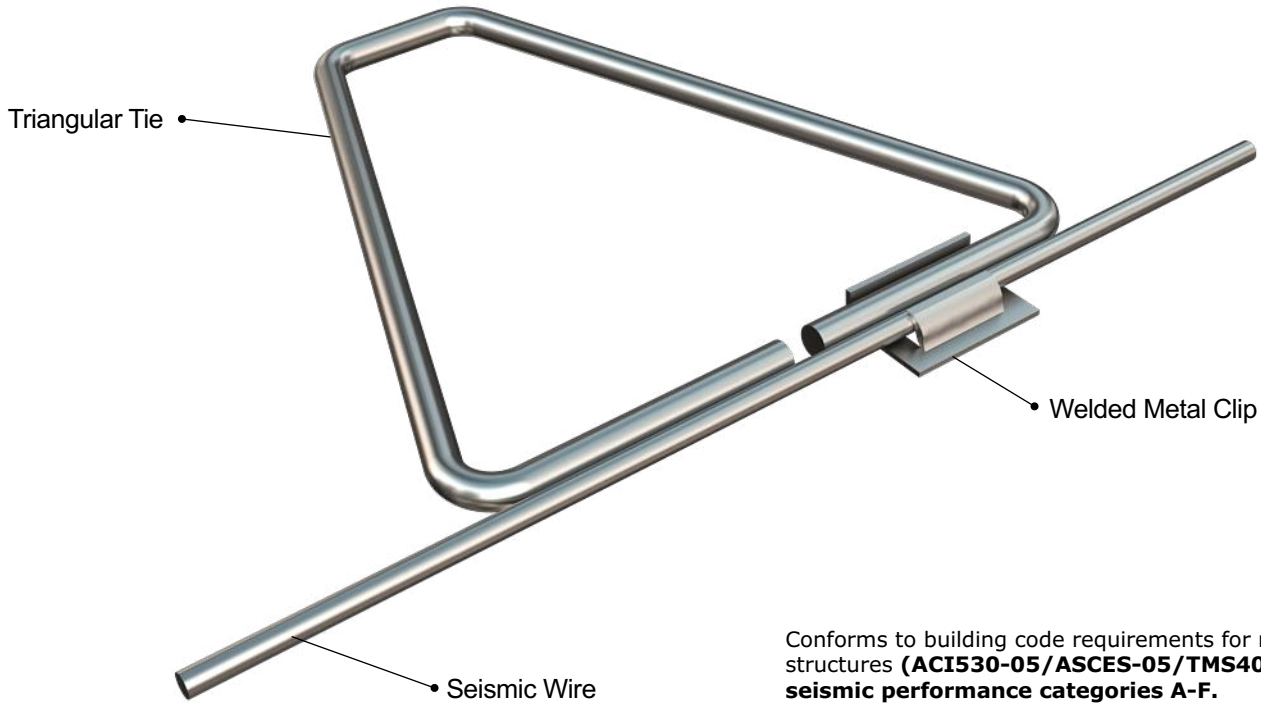

Conforms to building code requirements for masonry structures (**ACI530-05/ASCE5-05/TMS402-05**); seismic performance categories **A-F**.

MATERIAL CONFORMANCE	SIZES / FINISHES												
<p><b>ASTM A1064/A1064M, A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ASTM A951 / A951M-06</b> - (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b> Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p>	<p><b>Triangle:</b> 3/16" diameter standard</p> <p><b>Triangle Length:</b></p> <table border="0"> <tr> <td>3"</td> <td>4"</td> <td>5"</td> </tr> <tr> <td>6"</td> <td>7"</td> <td>Other</td> </tr> </table> <p><b>Straight &amp; Cut Seismic Wire</b></p> <table border="0"> <tr> <td>9 gauge</td> <td>3/16" Diameter</td> </tr> </table> <p><b>WIRE-BOND welded seismic clip:</b></p> <p>16 gauge Standard</p> <p><b>FINISH:</b></p> <table border="0"> <tr> <td>Mill Galvanized</td> <td>Stainless Steel:Type 304</td> </tr> <tr> <td>Hot Dip Galvanized</td> <td>Stainless Steel:Type316</td> </tr> </table>	3"	4"	5"	6"	7"	Other	9 gauge	3/16" Diameter	Mill Galvanized	Stainless Steel:Type 304	Hot Dip Galvanized	Stainless Steel:Type316
3"	4"	5"											
6"	7"	Other											
9 gauge	3/16" Diameter												
Mill Galvanized	Stainless Steel:Type 304												
Hot Dip Galvanized	Stainless Steel:Type316												
 <p><b>WIRE Recycled Content:</b> Mill Galvanized &amp; Hot Dip, 82.8% Post-Consumer 17.0% Post Industrial / Pre - Consumer Stainless Steel, 60% Post Consumer V O C Content - 0%</p>													

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113