



PRODUCT SUBMITTAL

WIRE-BOND

#1000 Type I Weld-On Anchor

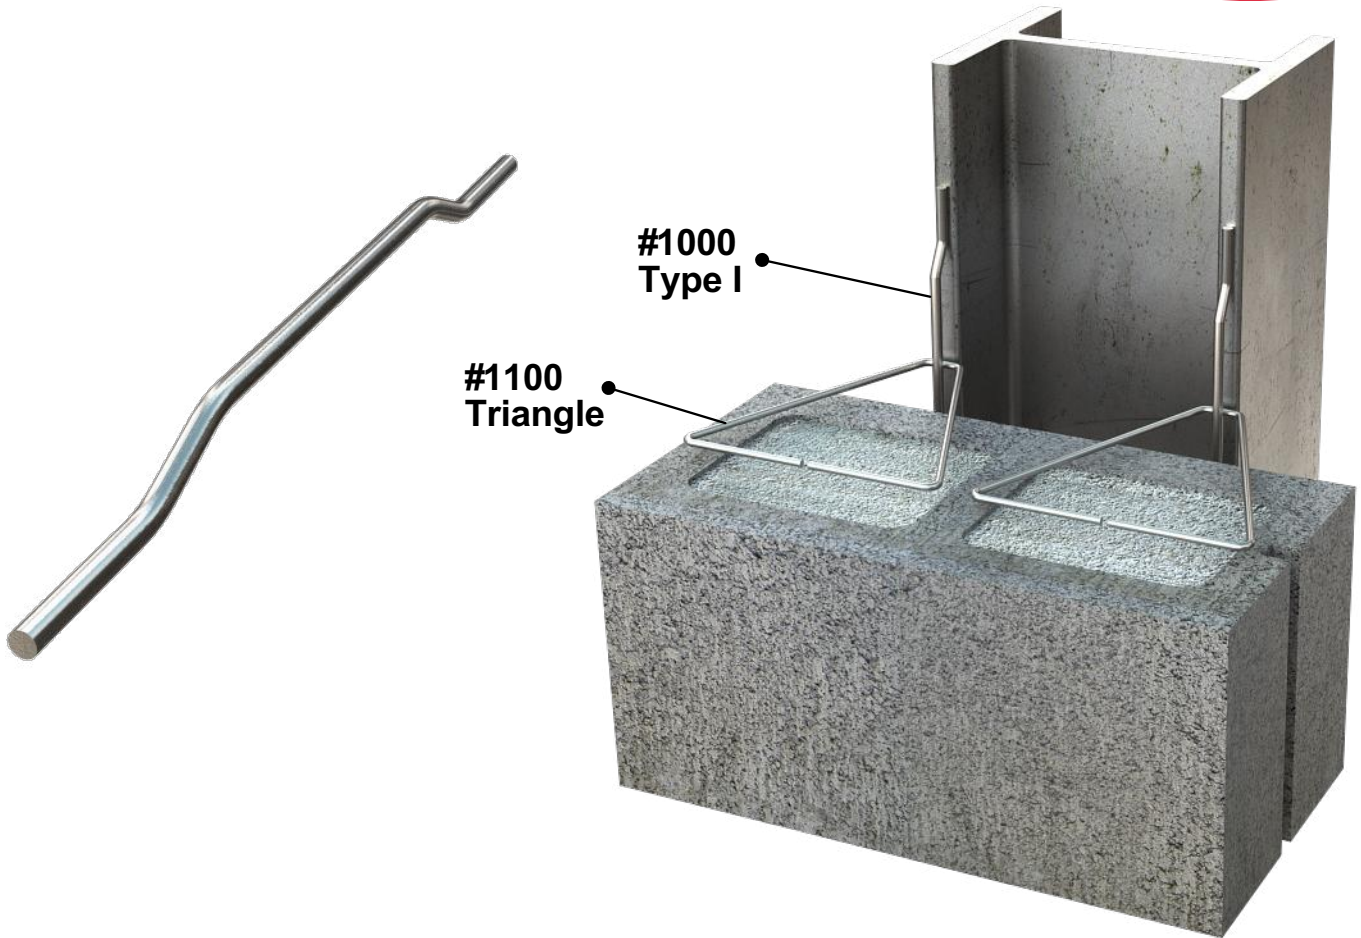

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M</p> <p>Tensile Strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum</p> <p>ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 (Building Code Requirements for Masonry Structures)</p> <p>Hot-Dip Galvanized after fabrication: ASTM A153/A153M-B2 (1.5 oz/ft)</p> <p>Wire (Stainless Steel): ASTM A580/ASTM 580M - AISI Type 304 (Type 316 available on special orders)</p> <p>Recycled Content: Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p>Stainless Steel 97% Pre-Consumer V O C Content - 0%</p> 	<p>#1000 Type I Weld-On:</p> <p>1/4" dia. x 5" 1/4" dia. x 9"</p> <p># 1100 Triangle:</p> <p>3/16" diameter standard</p> <p>3" x 3" 4" x 4" 5" x 5"</p> <p>6" x 6" 7" x 9" 9" x 9"</p> <p>Finishes:</p> <p>Mill Galvanized Hot Dip Galvanized Stainless Steel</p>

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-

3761
Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113