


Checker Block®



A SIKA COMPANY

GENERAL DESCRIPTION

Checker Block is a castellated pervious concrete grid unit made of high strength concrete with steel reinforcement. Each unit is cast in a grid of truncated concrete pyramids joined by horizontal concrete connectors. The grid unit is a nominal 24" x 24" x 4" deep and fabricated in accordance with ASTM C1319. Each unit is manufactured by Reading Rock/Ackerstone/Nicolock/Hastings Pavement Company and marketed by American Hydrotech for exclusive use in the Garden Roof® Assembly.

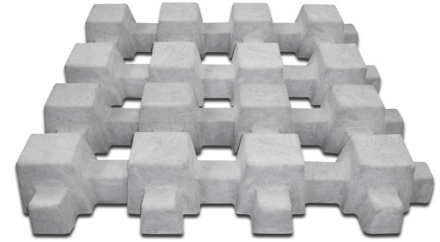

BASIC USE

Checker Block is used to provide enhanced wind ballasting as a part of the Garden Roof Assembly. It can be planted with InstaGreen® Carpet, intensive material or sedum/perennial plugs.

INSTALLATION

- Refer to Hydrotech’s Checker Block Tech Data Sheet for specific installation instructions.
- Stainless steel zip-ties from Hydrotech are required to connect Checker Block units together.
- Refer to Hydrotech’s Guide Details for additional information on technical requirements.

TECHNICAL DATA

SIZE:	24" x 24" (4.0 S.F. per grid unit)
OVERALL DEPTH:	4.0"
MEDIA DEPTH:	4.0"
SURFACE AREA RATIO:	25% concrete - 75% open for greenspace
WEIGHT:	25 lbs/S.F. + media
COMPRESSIVE STRENGTH:	6,780 lbs/square inch, average (ASTM C1319)
WATER ABSORPTION:	8.8 lbs/cubic inch gallons/S.F. used
VOID SPACE:	50%

LEED® INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	0	
Manufacture Location		Lindenhurst, NY Cincinnati, OH Corona, CA
Extraction/Harvesting Location		Lindenhurst, NY Cincinnati, OH Corona, CA
VOC Content (g/L)		0

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user’s consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.