

## 1000T250-68 (50ksi, CP60)

1000 (10") structural track with T250 (2-1/2") leg - 68mils (14ga)

Coating: CP60 per AISI S240

Color Code: Orange

### Geometric Properties

**Web depth:** 10.250 in    **Thickness:** 68mils (14ga)    **Yield strength, Fy:** 50 ksi  
**Leg width:** 2.50 in    **Design Thickness:** 0.0713 in    **\*Fy with Cold-Work, Fya:** 50.0 ksi  
**Min. steel thickness:** 0.0677 in    **Ultimate, Fu:** 65.0 ksi

#### Gross Section Properties of Full Section, Strong Axis

Cross sectional area (A)	1.068 in <sup>2</sup>
Member weight per foot of length	3.64 lb/ft
Moment of inertia (Ix)	15.143 in <sup>4</sup>
Section Modulus (Sx)	2.955 in <sup>3</sup>
Radius of gyration (Rx)	3.765 in
Gross moment of inertia (Iy)	0.536 in <sup>4</sup>
Gross radius of gyration (Ry)	0.708 in

#### Effective Section Properties, Strong Axis

Effective Area (Ae)	0.388 in <sup>2</sup>
Moment of inertia for deflection (Ix)	12.711 in <sup>4</sup>
Section modulus (Sx)	1.726 in <sup>3</sup>
Allowable bending moment (Ma)	51.68 in-k
Allowable shear force in web	3261 lb


#### Torsional Properties

St. Venant torsional constant (J x 1000)	1.810 in <sup>4</sup>
Warping constant (Cw)	10.240 in <sup>6</sup>
Distance from shear center to neutral axis (Xo)	-1.135 in
Distance between shear center and web centerline (m)	0.730 in
Radii of gyration (Ro)	3.995 in
Torsional flexural constant (Beta)	0.919

- Effective properties incorporate the strength increase from the cold work of forming.

### Code Approvals & Performance Standards

- [AISI S100-16 \(2020\) w/S2-20](#) North American Specification for the Design of Cold-Formed Steel Structural Members
- [AISI S240-20](#) North American Standard for Cold-Formed Steel Structural Framing
  - (Compliant to ASTM C955, but IBC replaced with AISI S200 in IBC 2015, AISI S240 in IBC 2018)
  - Section A3 Material - Chemical & mechanical requirements (Referencing ASTM A1003/A1003M)
  - Section A4 Corrosion Protection (Referencing ASTM A653/A653M)
  - Section A5 Products - Thickness, shapes, tolerances, identification
  - Section C Installation - (Referencing ASTM C1007)
- [AISI S202-20](#) Code of Standard Practice for Cold-Formed Steel Structural Framing
  - Section F3 Delivery, Handling and Storage of Materials
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories

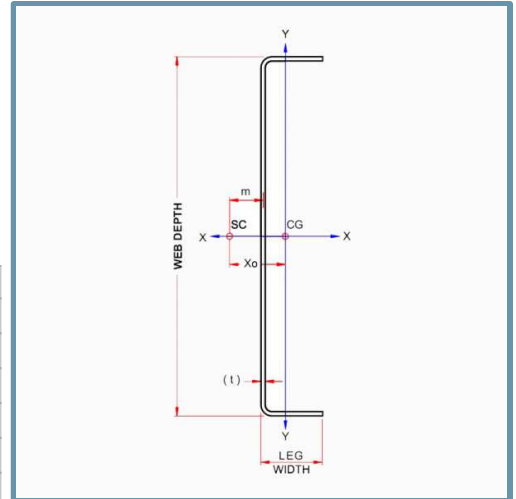

- Load-bearing walls
- Curtain walls
- Tall interior walls
- Floor & ceiling joists
- Trusses



**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).